

This lens with beamsplitter for coaxial illumination is designed for 12k / 5 $\mu$ m and 16k / 5 $\mu$ m line scan sensors. Optimized for a specific magnification of 2.0x the lens provides high performance in a small and compact package. The universal V48-Mount enables the best azimuth adjustment and the assembly of accessories like focusing mount, extension tubes and camera adapters.

## Key features

- Designed for 12k / 5  $\mu$ m and 16k / 5 $\mu$ m line scan sensors
- With beamsplitter for coaxial illumination
- Best azimuth marking
- 400 nm to 1000 nm broadband AR-coating

## Applications


- FPD inspection
- PCB inspection
- High resolution defect detection
- AOI (Automated Optical Inspection)

## Technical specifications


|                                     |   |
|-------------------------------------|---|
| Type [with beamsplitter]            | V48-BS                                      |
| ID [with beamsplitter]              | 1078988                                     |
| Interface                           | V48-Mount                                   |
| Focal length [mm]                   | 92  |
| F/# range                           | F/3.2 ... F/11                              |
| Numerical aperture [object   image] | 0.10   0.05                                 |
| Max. sensor size [mm]               | 82  |
| Max. angle of view [°]              | 17  |
| Rec. magnification range            | -2.0 (-2.2 ... -1.8)                        |
| Rec. working distance range [mm]    | 62 ... 72                                   |
| Max. mechanical focus travel [mm]   | -   |
| Filter thread [mm]                  | -   |
| Storage temperature [°C]            | -25 ... +70                                 |
| Net. weight [standard] [g]          | 560   |
| Additional info                     | Max. chief ray angle in object space = 8.3° |
| f'eff [mm]                          | 93.29                                       |
| SF [mm]                             | -20.80                                      |
| S'F' [mm]                           | 54.35                                       |
| HH' [mm]                            | -12.09                                      |
| $\beta$ 'P                          | 1.02  |
| SEP [mm]                            | 71.05                                       |
| S'AP [mm]                           | -40.41                                      |
| $\Sigma$ d [mm]                     | 99.35                                       |

## MTF charts


| Spectrum name    | VIS |     |     |     |     |     |
|------------------|-----|-----|-----|-----|-----|-----|
| Wavelengths [nm] | 425 | 475 | 525 | 575 | 625 | 675 |
| Rel. weights [%] | 8   | 16  | 23  | 22  | 19  | 13  |

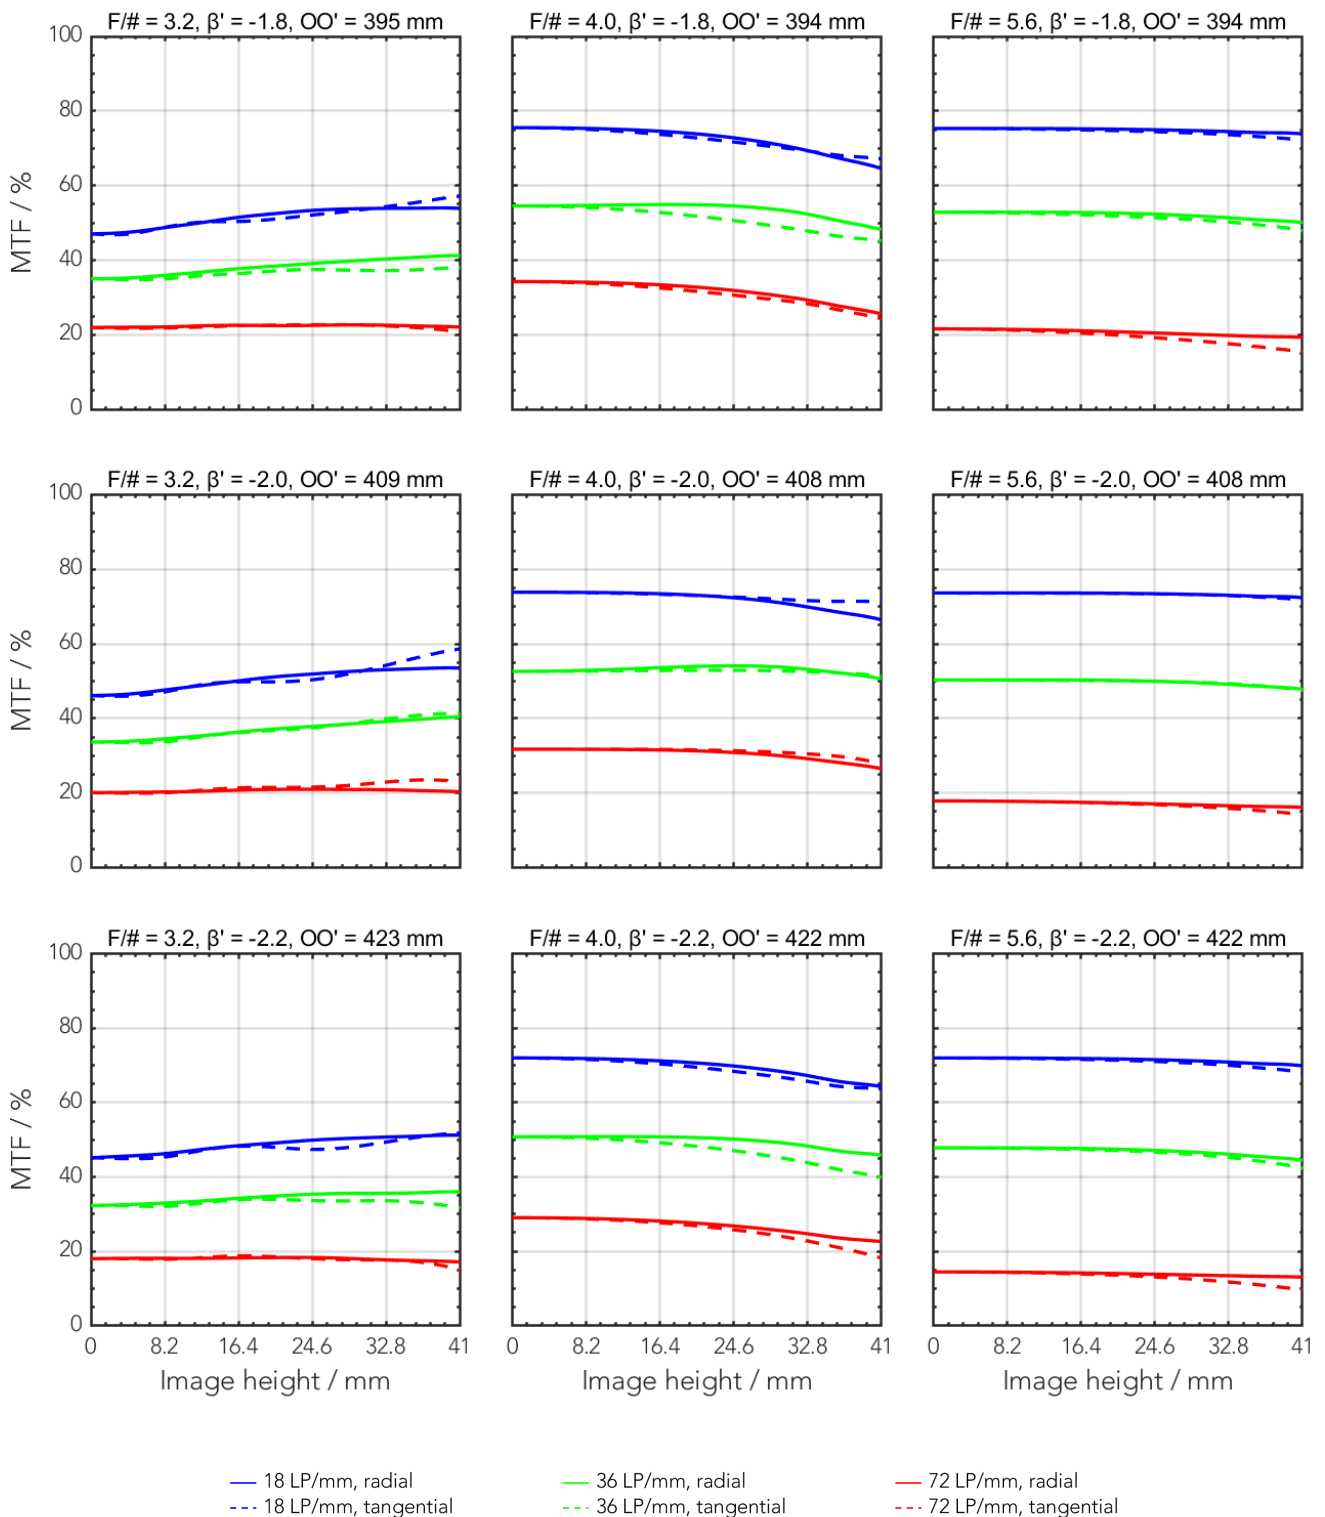


## Rel. illumination vs. image height

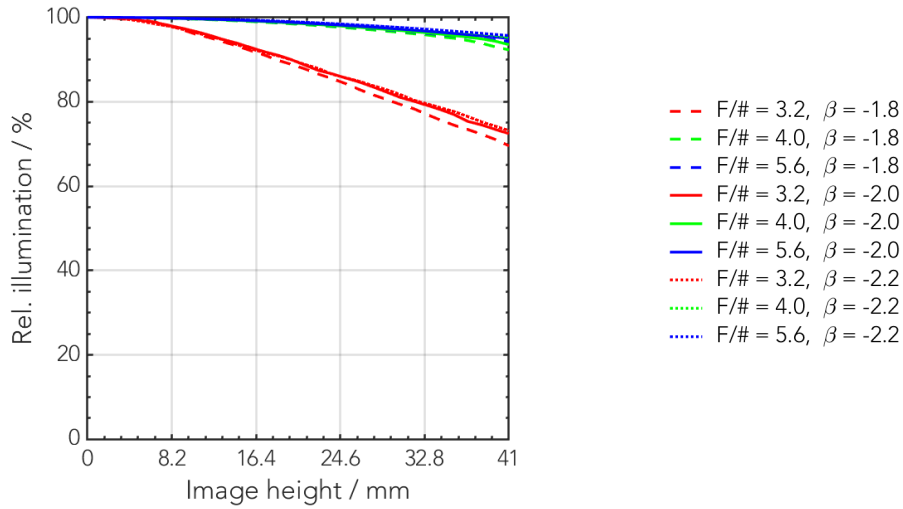

## Distortion vs. image height

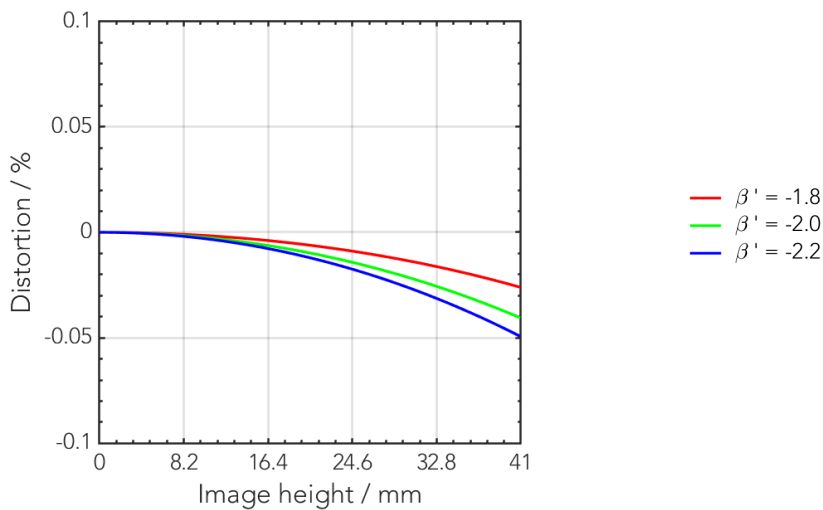



## Transmittance vs. wavelength

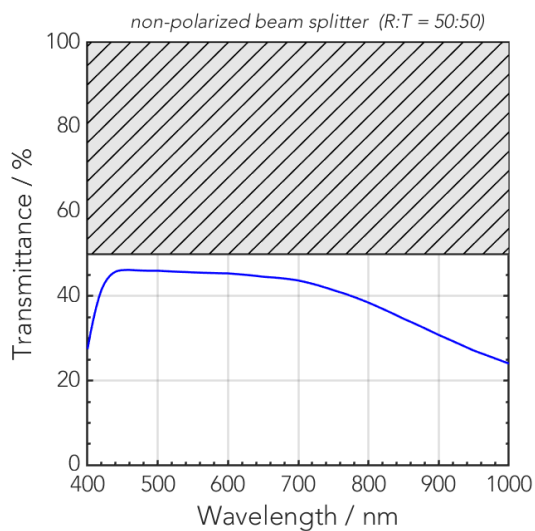

## Technical drawings

\* WD and s'A  
in air at  
beta' -2.0

view without  
transport protection

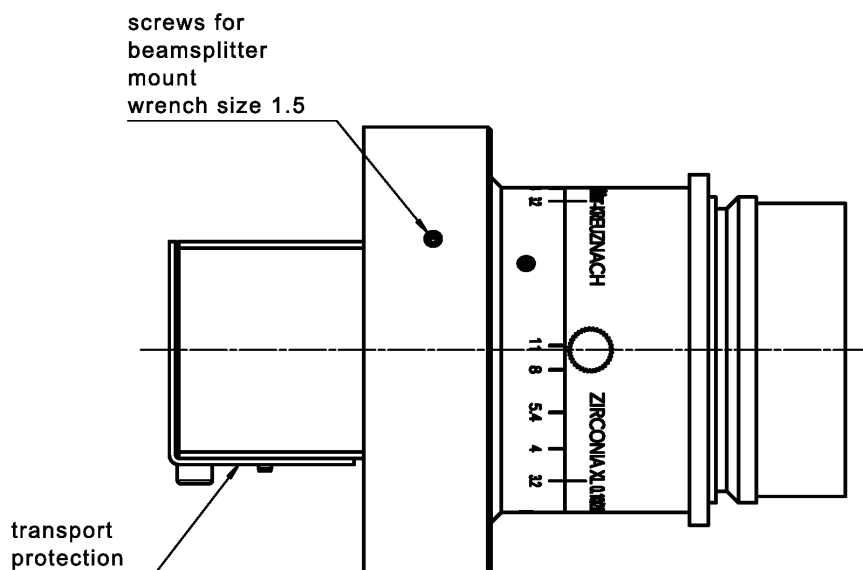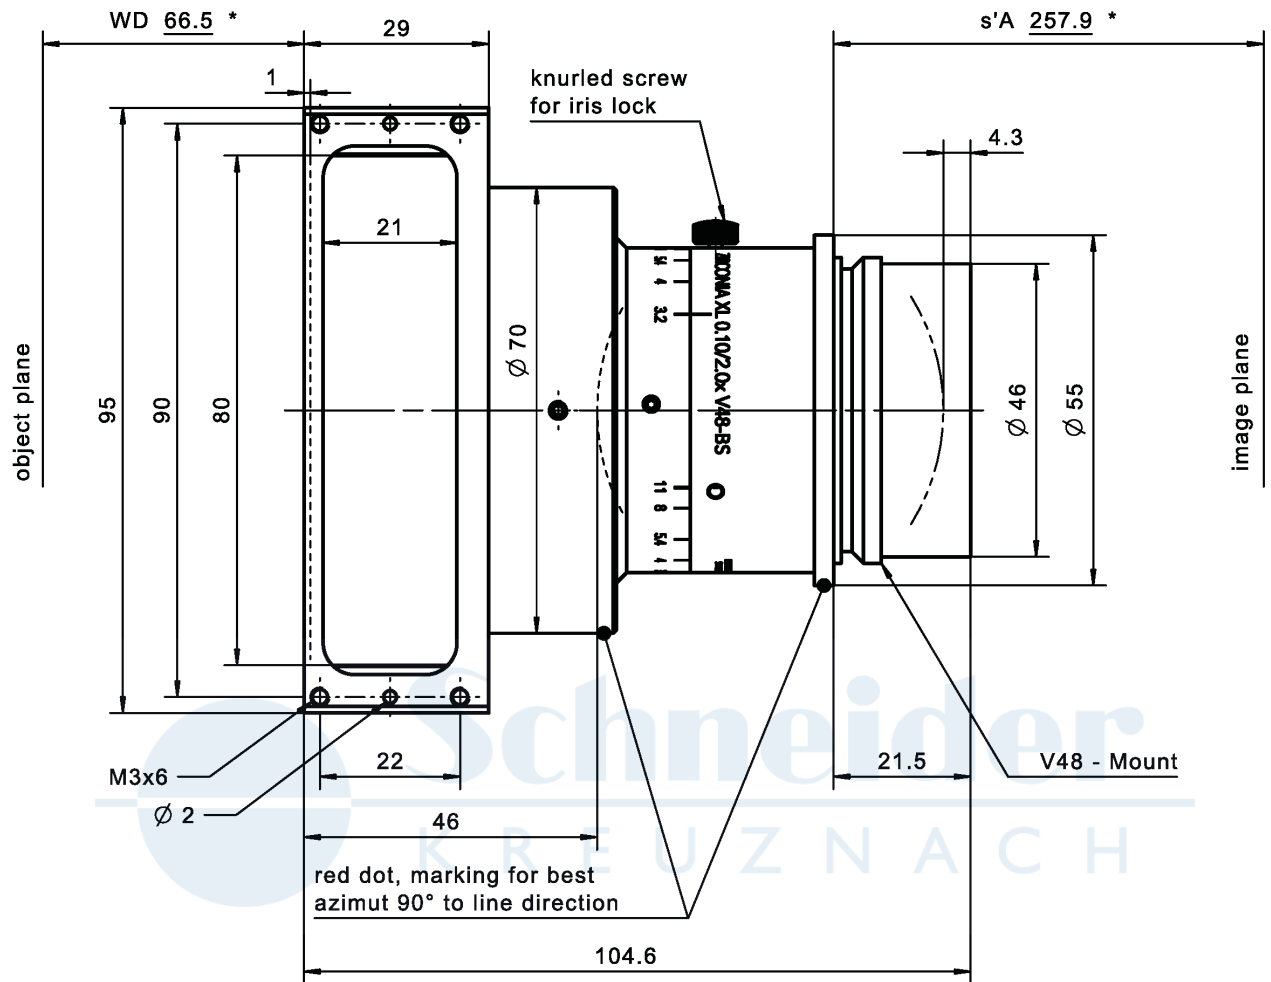

| Accessories | Mount                   | Eff. length    | ID      |
|-------------|-------------------------|----------------|---------|
| Unifoc 22   | V48 / V70               | 15.6 – 37.6 mm | 1075304 |
| Adapter     | V48 / M42 x 0.75        | 8.5 mm         | 1072652 |
|             | V48 / M42 x 1           | 8.5 mm         | 1072660 |
|             | V48 / M58 x 0.75        | 10 mm          | 1072659 |
|             | M58 x 0.75 / M90 x 1    | 4 mm           | 1084880 |
|             | V70 / M72 x 0.75        | 10 mm          | 1072419 |
|             | M72 x 0.75 / M42 x 1    | 6 mm           | 1079515 |
|             | M72 x 0.75 / M58 x 0.75 | 6 mm           | 1075556 |
|             | M72 x 0.75 / M90 x 1    | 4 mm           | 1084879 |
|             | M72 x 0.75 / M95 x 1    | 4 mm           | 1077013 |
|             | Extension Tube          | V48            | 10 mm   |
| V48         |                         | 25 mm          | 1072651 |
| V48         |                         | 50 mm          | 1072662 |
| M72 x 0,75  |                         | 5 mm           | 1072420 |
| M72 x 0,75  |                         | 10 mm          | 1072421 |
| M72 x 0,75  |                         | 25 mm          | 26406   |
| M72 x 0,75  |                         | 50 mm          | 1054733 |
| M72 x 0.75  |                         | 100 mm         | 1079483 |
| M90 x 1     |                         | 10 mm          | 1084875 |
| M90 x 1     |                         | 25 mm          | 1084876 |
| M90 x 1     |                         | 50 mm          | 1084877 |
| M90 x 1     |                         | 100 mm         | 1084878 |
| M95 x 1     |                         | 10 mm          | 1077290 |
| M95 x 1     |                         | 25 mm          | 1062892 |
| M95 x 1     |                         | 50 mm          | 1062893 |
| M95 x 1     | 100 mm                  | 1062894        |         |

| Annotation                   |   |
|------------------------------|---|
| Focal length                 | Nominal focal length  |
| F/# range                    | Image space F-number range for infinity focus position  |
| Numerical aperture           | Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)                              |
| Max. sensor size             | Image circle diameter   |
| Max. angle of view           | Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)            |
| Rec. magnification range     | Magnification range as recommended by Schneider-Kreuznach   |
| Rec. working distance range  | Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range                                      |
| Max. mechanical focus travel | Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Net weight                   | weight of unpacked lens without lens cap  |
| $f'_{\text{eff}}$            | Effective focal length  |
| SF                           | Distance between vertex of first lens surface and object space focal point  |
| S'F'                         | Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)  |
| HH'                          | Distance between principal planes   |
| $\beta'P$                    | Pupil magnification (= exit pupil diameter / entrance pupil diameter)   |
| SEP                          | Distance between vertex of first lens surface and entrance pupil  |
| S'AP                         | Distance between vertex of last lens surface and exit pupil   |
| $\Sigma d$                   | Distance between vertices of first and last lens surface  |
| s'A                          | Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)  |
| $\beta'$                     | Magnification (= image size / object size), negative value because image is inverted  |
| OO'                          | Distance between object and image   |

Unless otherwise stated all dimensions in this data sheet are in mm.