
OTR Large O-Ring Installer MODEL 40807







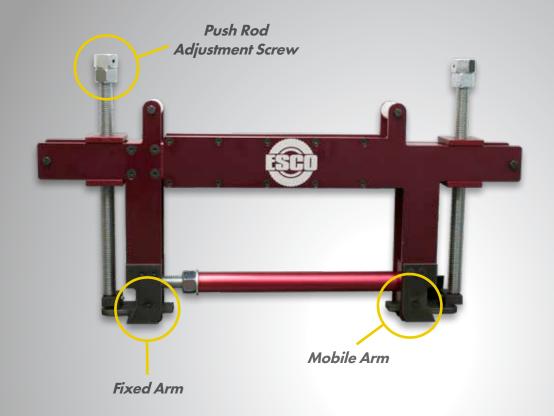

Benefits & Features:

- Used on 25" to 36" OTR Tires
- Designed and built to manually install and remove O-Rings
- Unit is also used to seperate the inside and outside beads
- Assists in the removal and installation of the lock ring

Tire Diameter	Width	Length	Height	Weight
25" - 36" <mark>635 - 914</mark> mm	3″ 7 6mm	32.5" 825mm	14.5" 368mm	36 lb. 16kg