

RESTAURANT RANGES**VULCAN****24" ELECTRIC RESTAURANT RANGE
4 FRENCH PLATES**

Model EV24S-4FP208
shown with adjustable legs

**SPECIFICATIONS**

24" wide electric restaurant range, Vulcan Model No. EV24S-4FP208. Fully MIG welded aluminized steel frame for added durability. Stainless steel front, sides, back riser, plate shelf and 6" adjustable legs. Four 9½" round French plates, 2 KW input per plate. Full width pull out stainless steel crumb tray located beneath the cooking top. Comes with one standard oven. Oven interior measures 20"w x 26½"d x 14"h. Comes with one oven rack and three rack positions. Oven door is heavy duty with an integrated door hinge / spring mechanism, requiring no adjustments. 5 KW input. Top browning heat control. Thermostat adjusts from 200°F to 500°F. Requires 208, 240 or 480 volt, 1 or 3 phase power supply. All ranges are shipped in 3 phase and are field convertible to single phase.

Exterior Dimensions:

34"d x 24"w x 58"h on 6" adjustable legs

- EV24S-4FP208** 4 French Plates / Standard Oven / 208V
- EV24S-4FP240** 4 French Plates / Standard Oven / 240V
- EV24S-4FP480** 4 French Plates / Standard Oven / 480V

STANDARD FEATURES

- Fully MIG welded aluminized steel frame for added durability
- Stainless steel front, sides, back riser, shelf and legs
- Four 9½" round, 2 KW French plates with infinite heat control switches. Four position heat switch on 480 volt.
- 5 KW oven with top browning control
- One standard oversized oven, interior measures 20"w x 26½"d x 14"h
- Full width pull out stainless steel crumb tray
- Thermostat adjusts from 200°F to 500°F
- Cool to the touch control knobs
- One oven rack and three rack positions
- 18" x 26" sheet pans fit front to back
- Requires 208, 240 or 480 volt, 1 or 3 phase power supply. (Ranges shipped in 3 phase and are field convertible to single phase)
- One year limited parts and labor warranty

ACCESSORIES (Packaged & Sold Separately)

- Extra oven rack
- Set of four casters (two locking)
- Towel bar
- Cutting board
- Condiment rail
- Fryer shield




**24" ELECTRIC RESTAURANT RANGE
4 FRENCH PLATES**

INSTALLATION INSTRUCTIONS

Clearances from Combustible Construction

	Rear	Sides
Range with French Plates	0"	3"
Range with Griddle Tops	0"	3"
Range with Hot Tops	0"	6"

Ranges with an ESB Salamander Broiler mounted above:
Refer to the ESB Salamander Broiler spec sheet for clearance specifications.

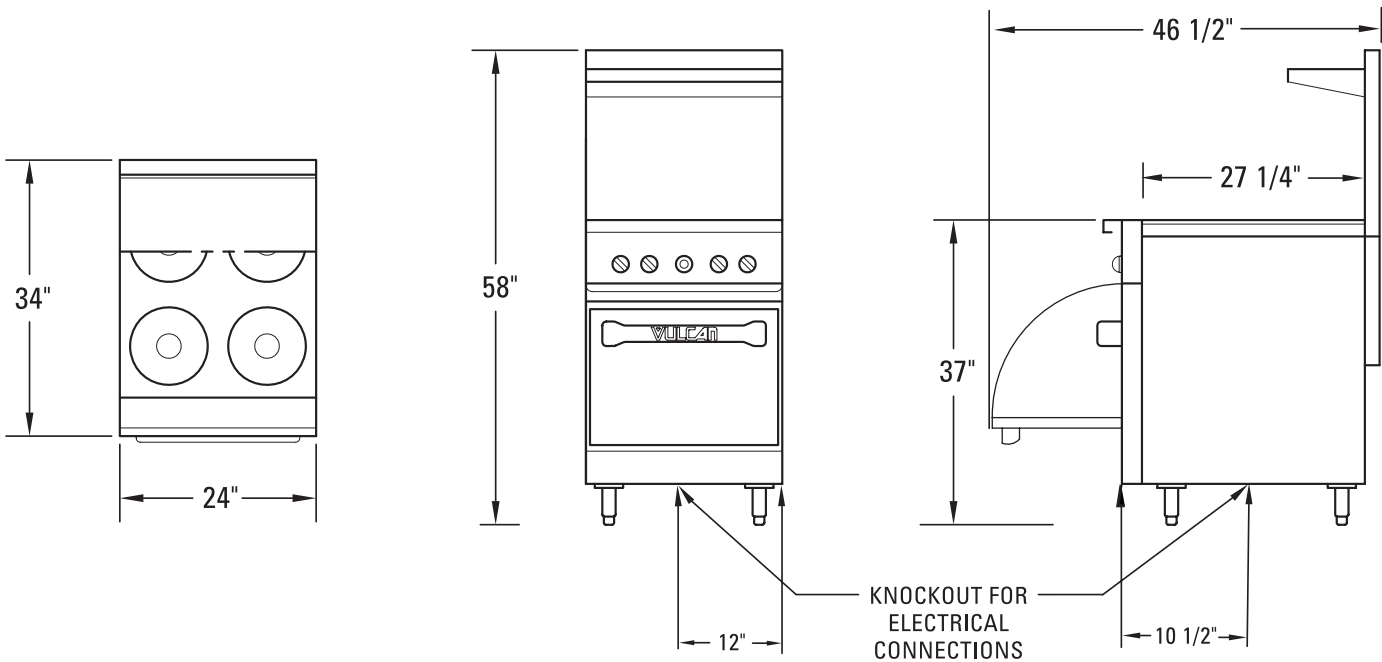

AVAILABLE VOLTAGES - 208, 240 OR 480 VOLT - 1 OR 3 PHASE									
3 PHASE LOADING						NOMINAL AMPS PER LINE WIRE			
MODEL NUMBER	VOLTAGE	TOTAL CONNECTING KW	KW PER PHASE			3 PHASE			1 PHASE
			X-Y	Y-Z	X-Z	X	Y	Z	
EV24S-4FP208	208	13.0	5.0	4.0	4.0	37.5	37.5	33.3	62.5
EV24S-4FP240	240	13.0	5.0	4.0	4.0	32.5	32.5	28.9	54.2
EV24S-4FP480	480	13.0	5.0	4.0	4.0	16.3	16.3	14.4	27.1