AccelTex®
SOLUTIONS

ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz
Gain: 12/12/12 dBi
Polarization: Vertical and Horizontal
Horizontal Beamwidth: 35°/30°/30°
Vertical Beamwidth: 35°/30°/30°
VSWR: <2

MECHANICAL SPECIFICATIONS

Dimensions: 19.3"x 19.3"x 2.44"(490x490x62mm)
Weight: 2.2 lb (4 kg)
Installation: Flush Mount to Wall or Articulation Mount

Radome Material: ASA
Connector: RPSMA
Number of Leads: 8
Cable Length: 36" (910mm)
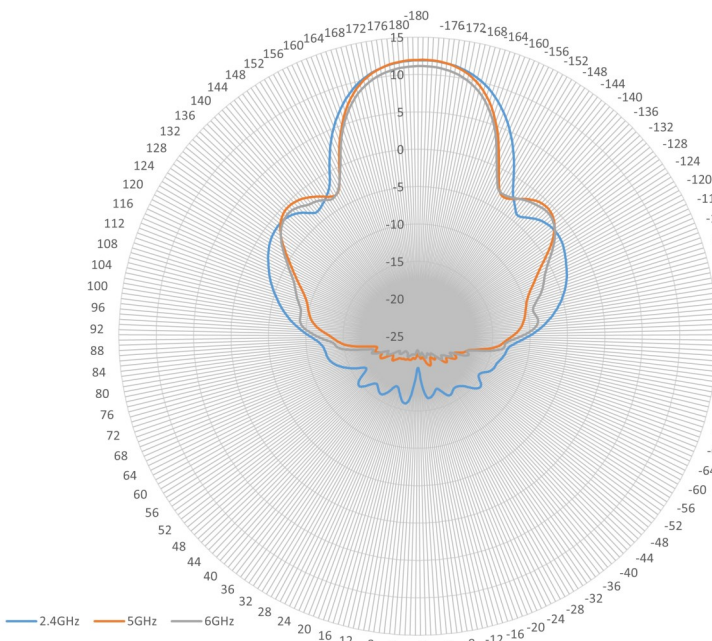Cable Type: ATS-195

ENVIRONMENTAL SPECIFICATIONS

Installation Environment: Indoor/Outdoor
IP Rating: IP66

WARRANTY

2 Year Limited Warranty

HORIZONTAL

VERTICAL

1.57" (40mm)

9.84" (250mm)

0.87" (22mm)

19.3" (490mm)

17.9" (455mm)

17.9" (455mm)

19.3" (490mm)