



### ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz  
 Gain: 4/6/6 dBi  
 Polarization: Vertical  
 Horizontal Beamwidth: 360°/360°/360°  
 Vertical Beamwidth: 105°/105°/105°  
 VSWR: <2.0



### MECHANICAL SPECIFICATIONS

Dimensions: 6.5" x 6.3" (165mm D x 160mm H)  
 Weight: 1.5 lb (0.68 kg)  
 Installation: Flush Mount to Wall or Articulating Arm Mount (included)

Radome Material: ABS  
 Connector: 10 MPC  
 Number of Leads: 10  
 Cable Length: 36" (910mm)  
 Cable Type: RG316



### ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Due to LPI requirements, indoor only  
 IP Rating: IP66

### WARRANTY

2 Year Limited Warranty



### HORIZONTAL

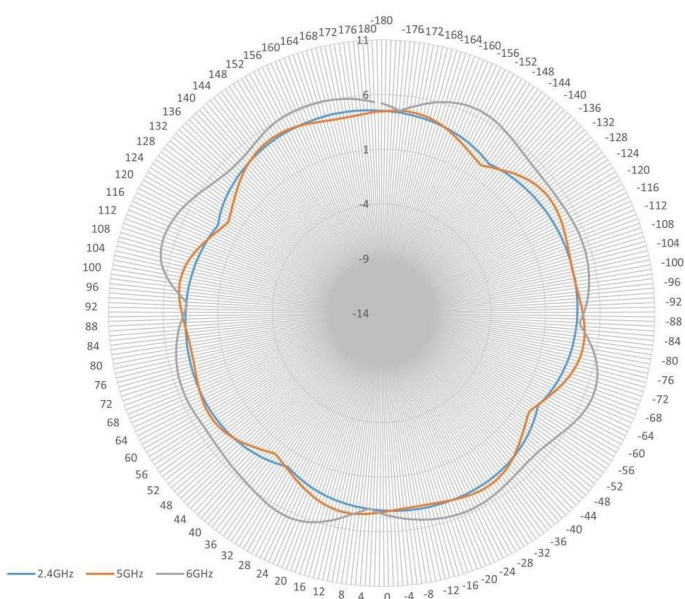

### VERTICAL

