



## ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz  
 Gain: 8 / 8 / 8 dBi  
 Polarization: 5 Vertical / 5 Horizontal  
 Horizontal Beamwidth: 115°/110°/110°  
 Vertical Beamwidth: 50°/25°/25°  
 VSWR: <2.5



## MECHANICAL SPECIFICATIONS

Dimensions: 15.4" x 15.4" x 2.24" (390x390x57mm)  
 Weight: 1.5 lb (0.68 kg)  
 Installation: Flush Mount to Wall or  
 Articulating wall/pole mount (included)

Radome Material: ABS  
 Connector: 4MPC & 6MPC  
 Number of Leads: 10  
 Cable Length: 36" (910mm)  
 Cable Type: RG316



## ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Due to LPI requirements, Indoor only  
 IP Rating: IP66

## WARRANTY

2 Year Limited Warranty



## HORIZONTAL

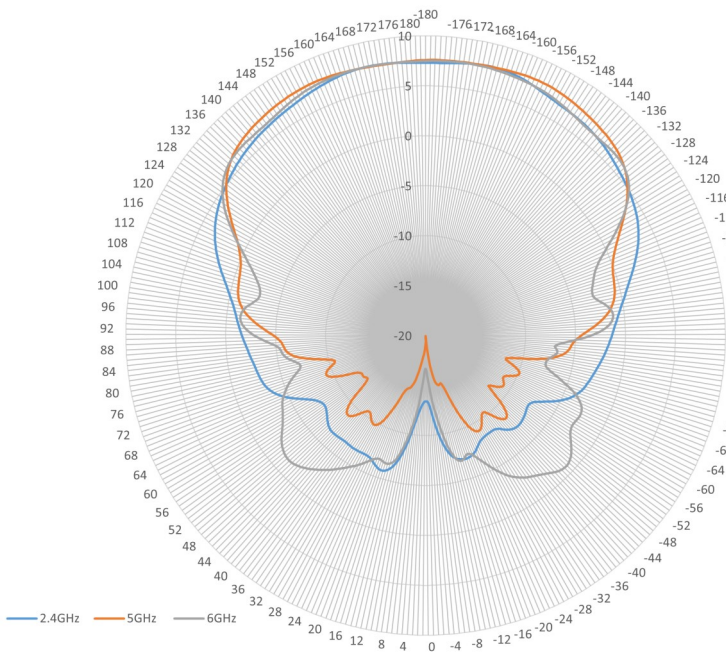

## VERTICAL

