



## ELECTRICAL SPECIFICATIONS

Frequency Range: 2.4-2.48/5.15-5.85/6-7.125 GHz  
Gain: 8/8/8  
Polarization: 4 Vertical, 4 Horizontal  
Horizontal Beamwidth: 115°/110°/110°  
Vertical Beamwidth: 50°/25°/25°

VSWR: <2.5  
Isolation: >30 dB  
Impedance: 50 Ω  
Lightning Protection: None  
Max Input Power: 50 W per port



## MECHANICAL SPECIFICATIONS

Dimensions: 12.99" x 12.99" x 1.37"  
(330x330x35mm)  
Weight: 2.5 lb (1 kg)  
Installation: Flush Mount to Wall/Ceiling or Articulation Arm

Radome Material: ABS  
Connector: Right Angle DART-8  
Number of Leads: 8  
Cable Length: 36" (910mm)  
Cable Type: ATS-100



## ENVIRONMENTAL SPECIFICATIONS


Installation Environment: Indoor/Outdoor  
Operating Temperature: -40 to 158°F (-40 to 70°C)  
Wind Velocity: 134 mph (216 km/h)  
IP Rating: IP66

## WARRANTY

2 Year Limited Warranty



## HORIZONTAL

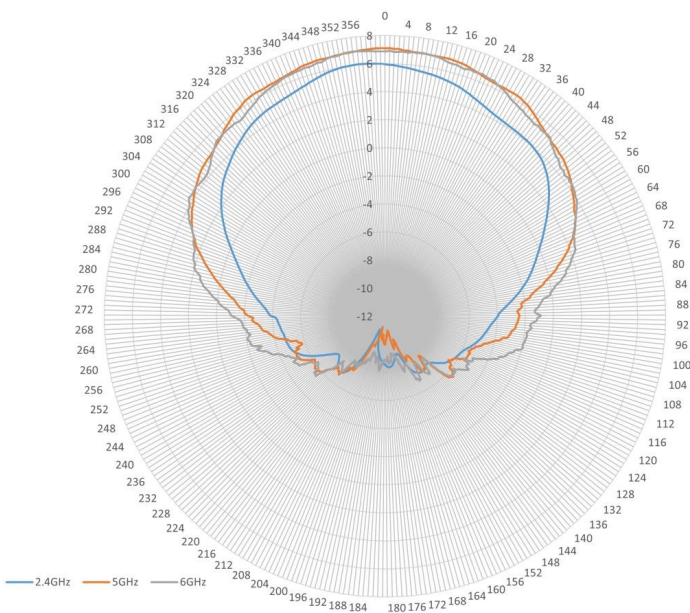

## VERTICAL

