

# Reference Manual

## C DX 5624

**SD/HD Down Converter with Embedded Audio Support and  
Video and Audio D/A Conversion**

**Revision 2.0 (HW Revision 03 required)**

**FW V325**

**July 2008**



Information in this document is subject to change without notice. No part of this document may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, without express written permission of LYNX Technik AG.

LYNX Technik AG may have patents, patent applications, trademarks, copyrights or other intellectual property rights covering the subject matter in this document. Except as expressly written by LYNX Technik AG, the furnishing of this document does not give you any license to patents, trademarks, copyrights or other intellectual property of LYNX Technik AG or any of its affiliates.

**LYNX Technik AG  
Brunnenweg 3  
D 64331 Weiterstadt  
Germany**

[www.lynx-technik.com](http://www.lynx-technik.com)

## Contents

<b>WARRANTY .....</b>	<b>3</b>
<b>REGULATORY INFORMATION.....</b>	<b>4</b>
EUROPE .....	4
USA.....	4
<b>GETTING STARTED .....</b>	<b>5</b>
PACKAGING .....	5
ESD WARNING .....	5
<b>PRODUCT DESCRIPTION.....</b>	<b>6</b>
INPUT FORMATS.....	6
OUTPUT FORMATS .....	6
CONVERSION MODES.....	6
ASPECT RATIOS.....	7
VIDEO PROCESSING.....	8
AUDIO PROCESSING.....	8
TEST PATTERNS .....	9
<b>FUNCTIONAL DIAGRAM.....</b>	<b>9</b>
<b>MODULE LAYOUT.....</b>	<b>10</b>
<b>CONNECTIONS.....</b>	<b>11</b>
VIDEO.....	11
AUDIO .....	11
<b>INSTALLATION.....</b>	<b>12</b>
<b>SETTINGS AND CONTROL.....</b>	<b>13</b>
MULTI FUNCTION SWITCH.....	13
USING THE LOCAL DISPLAY MENUS .....	13
MENU STRUCTURE.....	14
<b>LED STATUS INDICATORS .....</b>	<b>17</b>
<b>CONTROL SYSTEM GUI .....</b>	<b>18</b>
MAIN TAB .....	19
ANALOG VIDEO TAB .....	21
ANALOG VIDEO GAIN TAB.....	25
ANALOG AUDIO GAIN TAB .....	26
<b>SPECIFICATIONS .....</b>	<b>28</b>
<b>SERVICE .....</b>	<b>29</b>
PARTS LIST.....	29
TECHNICAL SUPPORT.....	29
CONTACT INFORMATION .....	29

# Warranty

LYNX Technik AG warrants that the product will be free from defects in materials and workmanship for a period of two (2) year from the date of shipment. If this product proves defective during the warranty period, LYNX Technik AG at its option will either repair the defective product without charge for parts and labor, or will provide a replacement in exchange for the defective product.

In order to obtain service under this warranty, customer must notify LYNX Technik of the defect before expiration of the warranty period and make suitable arrangements for the performance of service. Customer shall be responsible for packaging and shipping the defective product to the service center designated by LYNX Technik, with shipping charges prepaid. LYNX Technik shall pay for the return of the product to the customer if the shipment is within the country which the LYNX Technik service center is located. Customer shall be responsible for payment of all shipping charges, duties, taxes and any other charges for products returned to any other locations.


This warranty shall not apply to any defect, failure, or damage caused by improper use or improper or inadequate maintenance and care. LYNX Technik shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than LYNX Technik representatives to install, repair or service the product; b) to repair damage resulting from improper use or connection to incompatible equipment; c) to repair any damage or malfunction caused by the use of non LYNX Technik supplies; or d) to service a product which has been modified or integrated with other products when the effect of such modification or integration increases the time or difficulty servicing the product.

THIS WARRANTY IS GIVEN BY LYNX TECHNIK WITH RESPECT TO THIS PRODUCT IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED. LYNX TECHNIK AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LYNX TECHNIK'S RESPONSIBILITY TO REPAIR AND REPLACE DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO THE CUSTOMER FOR BREACH OF THIS WARRANTY. LYNX TECHNIK AND ITS VENDORS WILL NOT BE LIABLE FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES IRRESPECTIVE OF WHETHER LYNX TECHNIK OR THE VENDOR HAS ADVANCE NOTICE OF THE POSSIBILITY OF SUCH DAMAGES.

# Regulatory information

## Europe

### Declaration of Conformity

We	LYNX Technik AG Brunnenweg 3 D-64331 Weiterstadt Germany
<i>Declare under our sole responsibility that the product</i>	
TYPE: <b>C DX 5624</b>	
<i>To which this declaration relates is in conformity with the following standards (environments E1-E3):</i>	
EN 55103-1 /1996	
EN 55103-2 /1996	
EN 60950 /2001	
<i>Following the provisions of 89/336/EEC and 73/23/EEC directives.</i>	
	Winfried Deckelmann
Weiterstadt, November 2006	
<i>Place and date of issue</i>	<i>Legal Signature</i>

## USA

### FCC 47 Part 15

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to the part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense

## Getting Started

Most CardModules are installed into the rack frames and system tested in the factory. If this is an upgrade part or service exchange item then the module is supplied in a padded cardboard carton which includes the CardModule, rear connection plate and mounting screws.

### Packaging

The shipping carton and packaging materials provide protection for the module during transit. Please retain the shipping cartons in case subsequent shipping of the product becomes necessary. Do not remove the module from its protective static bag unless observing adequate ESD precautions. Please see below.

### ESD Warning



This product is static sensitive. Please use caution and use preventative measures to prevent static discharge or damage could result to module.

### Preventing ESD Damage

Electrostatic discharge (ESD) damage occurs when electronic assemblies or the components are improperly handled and can result in complete or intermittent failure.

Do not handle the module unless using an ESD-preventative wrist strap and ensure that it makes good skin contact. Connect the strap to any solid grounding source such as any exposed metal on the rack chassis or any other unpainted metal surface.

### Caution

Periodically check the resistance value of the antistatic strap. The measurement should be between 1 and 10 Megohms.

# Product Description

The C DX 5624 is a high quality multi-format down converter providing down converted digital and analog video outputs + analog and digital audio outputs.

## Input Formats

The module has one multi-format serial digital input with automatic input detection. The module will detect the following input standards and configure the input stage automatically for operation in the connected format.

SDTV Formats	HDTV Formats
525 / 59.94Hz	1080i / 59.94Hz
625 / 50Hz	1080i / 60Hz
	1080i / 50Hz
	720P / 59.94Hz
	720P / 60Hz
	720P / 50Hz

## Output Formats

The module provides analog and digital video outputs. The analog video outputs are SDTV only and the available 3 BNC connections can be configured to provide the following analog video outputs.

- 3 x CVBS (composite) or
- 1 x YC (S-VHS) + 1 x CVBS (composite) or
- 1 x YUV or
- 1 x RGB (for HW Revision 03 only, older boards do not support this)

Two serial digital outputs are also provided which can be configured to provide 2 x digital down converted outputs or 2 x re-clocked copies of the input signal (1>2 distribution amplifier)

## Conversion Modes

### HDTV Inputs > Down Conversion

With a compatible HD source connected the module only supports down conversion between divisible frame rates. For example If a frame rate of 59.94Hz is connected to the input then the module can only output a down converted 59.94Hz output. This module will not function as standards converter.

Please refer to the table below which shows compatible conversion modes

Input Signal	Converted Output	Notes
1080i / 50Hz	625 / 50Hz	
1080i / 59.94Hz	525 / 59.94Hz	
1080i / 60Hz	525 / 59.94Hz	59.94Hz output will drop frame
720P / 50Hz	625 / 50Hz	
720P / 59.94Hz	525 / 59.94Hz	
720P / 60Hz	525 / 59.94Hz	59.94Hz output will drop frame

**Note.** It is possible to convert between 60Hz and 59.94Hz. The resulting cumulative error will result in dropped frames on the converted outputs.

## SDTV Inputs

When a SDTV input is detected the module functions as a D/A converter + distribution amplifier providing analog and digital outputs of the connected SDTV input signal.

## Aspect Ratios

The module supports three aspect ratio conversion modes which can be user selected using the local controls or preset with the optional control system.

### Letterbox

This takes the 16:9 aspect ratio of the input HD signal and fits it into the 4:3 SD aspect ratio screen with black bars at the top and bottom of the image.

### Center Cut

This mode cuts the center portion of the 16:9 input signal and fills the 4:3 SD aspect ratio screen.

### Stretch to Fill

This mode takes the 16:9 input signal and distorts (vertically stretches) the image to fit the available 4:3 SD aspect ratio space.



16:9 HDTV Source



4:3 Center Cut



4:3 Letterbox



4:3 Stretch to fill

## Video Processing

Note. All digital signal processing and D/A conversion is 10 bit.

### Video Proc Amp

A basic video proc amp is provided for video adjustments. This provides for adjustable Y Gain / U Gain / V Gain / Black Level / Sharpness and Hue

*Note. Proc amp functions are preset to null. These parameters are adjustable via the local controls or central control system. Please refer to page 18 for illustrations of the available GUI controls*

### Aperture Correction and Color Space Conversion

Adjustable horizontal aperture correction is provided as well as selectable 709 > 601 color space (gamut) conversion. Color space conversion can be set to convert or transparent modes. In transparent mode the color space is passed from the input to the output.

*Note. Horizontal Aperture correction is factory preset for a flat frequency response on the SDTV outputs. (The down conversion filtering process results in a slight roll off in high frequencies). The amount of aperture correction applied is user adjustable via the local controls or via the central control system. Please refer to page 18 for illustrations of the available GUI controls.*

All module settings are automatically stored in internal flash ram and will survive power cycles and long term storage.

*Note. Settings will be written to flash RAM automatically after 10 seconds with no activity. This can be observed by the alarm LED flashing yellow three times. If power is removed before the settings have been stored the module will revert back to the previous settings when powered up*

## Audio Processing

The module provides full audio support and will de-embed the complete audio payload (8xAES) from the incoming SDI signal. This audio is delayed to match the video processing delay (1 frame) and then re-embedded into the digital down converted outputs.

Four of the de-embedded AES signals can be selected and output as external digital AES signals (balanced AES3 signals on the SubD connector). Two additional AES signals can be selected and output as balanced analog outputs via high quality 24 bit Audio D/A converters. Full scale ranging, adjustable gain and de-emphasis is provided for each analog audio output. Balanced analog audio outputs are provided on the integrated 25 pin SubD connector.

### DolbyE

If the incoming SDI signal has an encoded DolbyE stream this will be de-embedded, delayed one frame and re-embedded into the same channels on the down converted SDI outputs. Providing the Dolby "Guard Band" was timed correctly on the input then the SDI outputs will have the correct DolbyE audio timing and guard band timing will be preserved.




## Test Patterns


The module contains a selection of video test patterns which can be used for testing and fault finding. Patterns provided are 75% Colorbars, 75% Colorbars over Red, Full Field Black, Pathological PLL/EQ and Full field Blue (blue screen). Test patterns are provided on the analog and Digital video outputs in the selected format. If configured to pass the input HDTV to the digital outputs then both a Digital HD Test patterns and an Analog SDTV patterns are provided.

By pre-selecting the input format (with no input connected) the Module can be used as a stand alone multi-format Test Pattern Generator.


## Functional Diagram

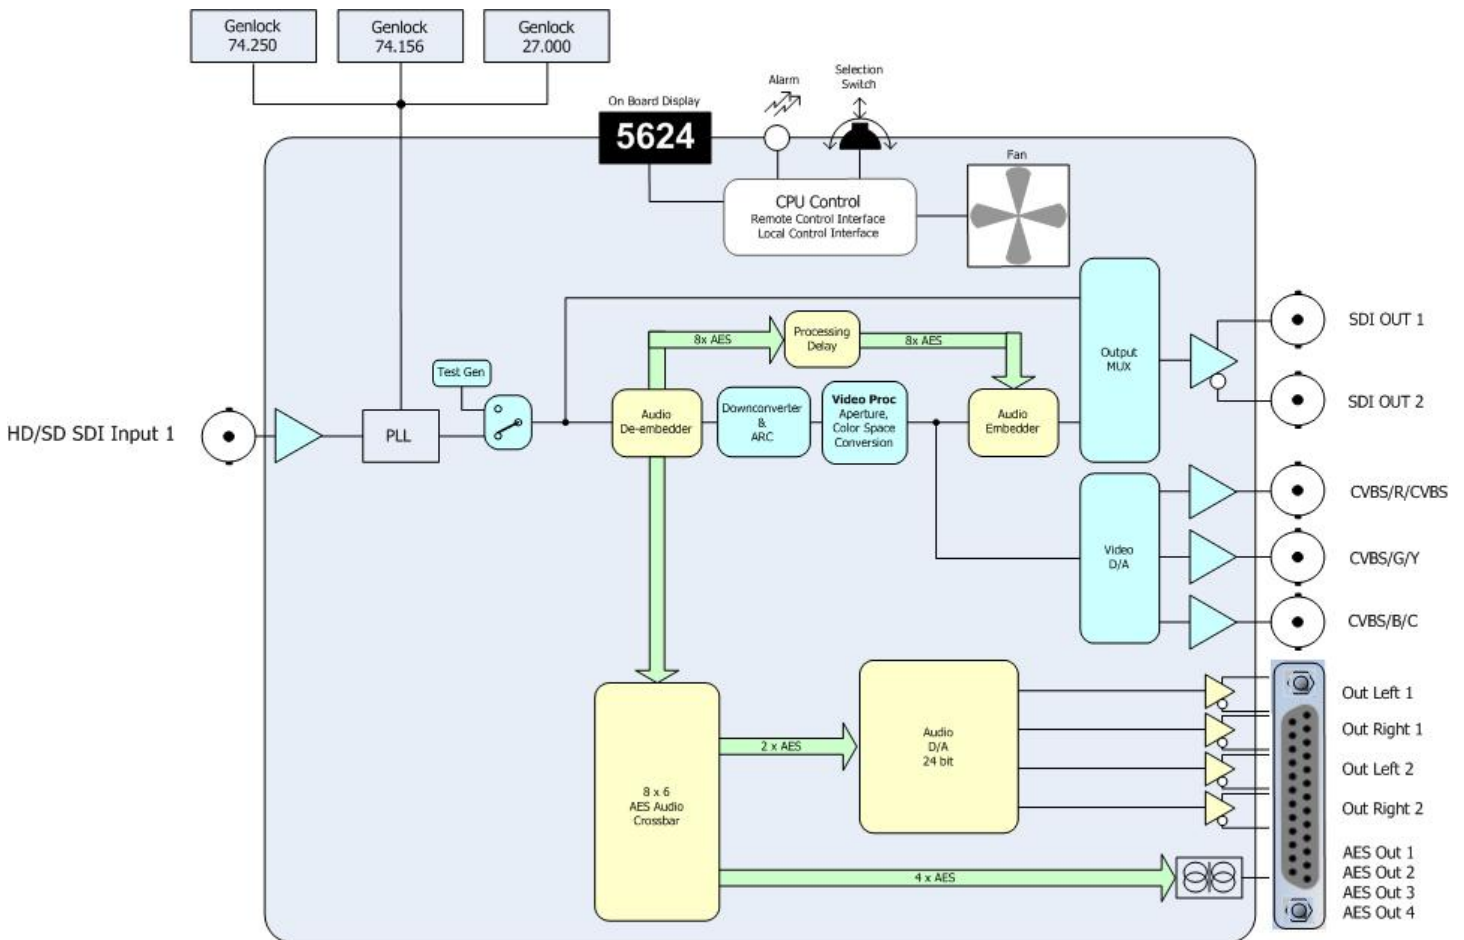


# Module Layout

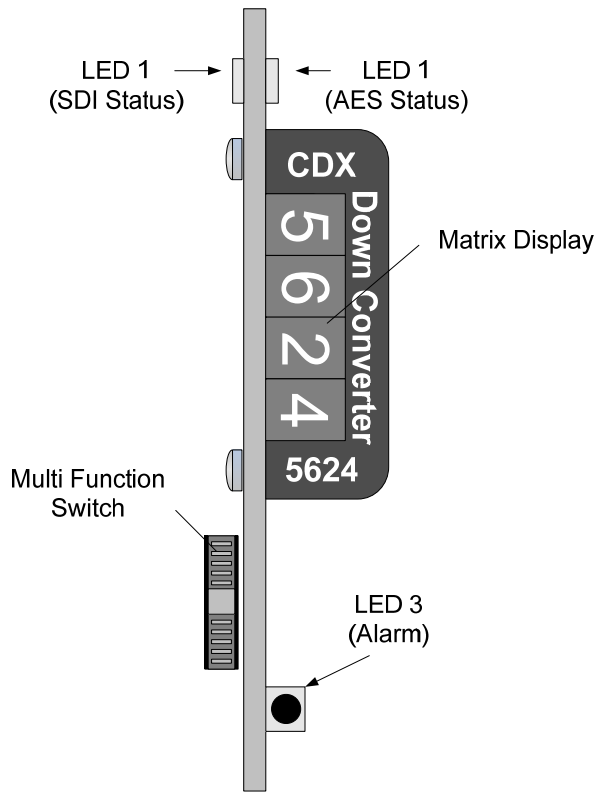

Module Front Panel

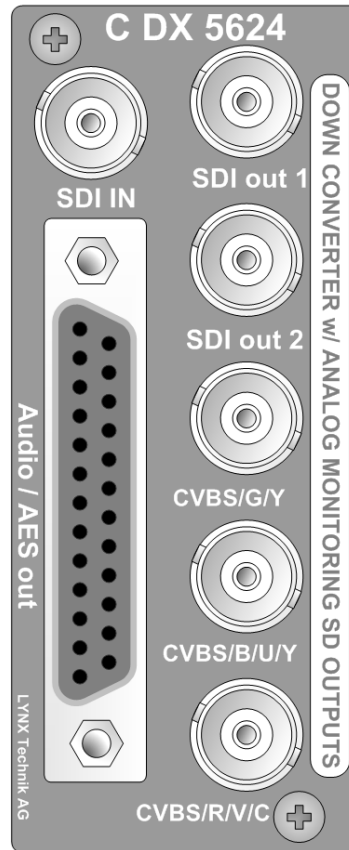

Module Rear Termination Panel

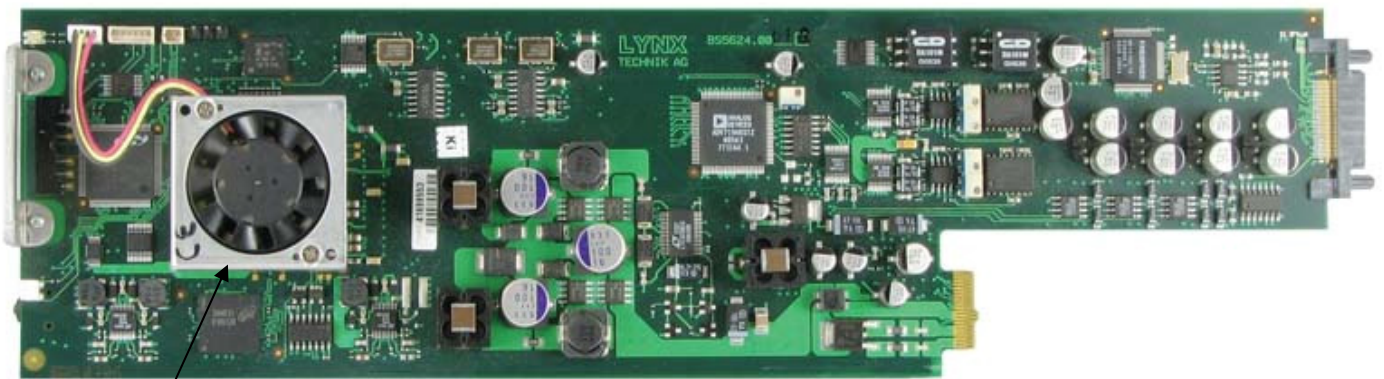

Cooling Fan

CardModule Layout

**Note.** Cooling fan operation is monitored and alarmed when using the LYNX control system

# Connections

## Video

The C DX 5624 uses standard 75 Ohm BNC connectors. We recommend the use of high quality video cable for digital video connections to reduce the risk of errors due to excessive cable attenuation. Max cable lengths the module will support are shown below.

SDTV = 250m Belden 8281 (270Mbits/s)

HDTV = 140m Belden 1694A (1.4Gbits/s)

**Note.** Due to the compact design of the connection plate it will be necessary to use a connection tool to secure the BNC video connectors.

## Audio


### Digital Audio (AES)

The module provides for both Unbalanced (AES3id) and Balanced (AES3) connections. Unbalanced connections are made using the two BNC connectors (AES 1 and AES2) Balanced connections are made via the 25 pin SubD connector. Connection details shown below.

### Analog Audio

Balanced analog audio connections are made using the 25 pin SubD connector. Connection details shown below.

Pin Number	Connection	Pin Number	Connection
1	Analog 1 L +	14	Analog 1 L -
2	Analog 1 L GND	15	Analog 1 R +
3	Analog 1 R -	16	Analog 1 R GND
4	Analog 2 L +	17	Analog 2 L -
5	Analog 2 L GND	18	Analog 2 R +
6	Analog 2 R -	19	Analog 2 R GND
7	AES 1 +	20	AES 1 -
8	AES 1 GND	21	AES 2 +
9	AES 2 -	22	AES 2 GND
10	AES 3 +	23	AES 3 -
11	AES 3 GND	24	AES 4 +
12	AES 4 -	25	AES 4 GND
13	(n.c)		

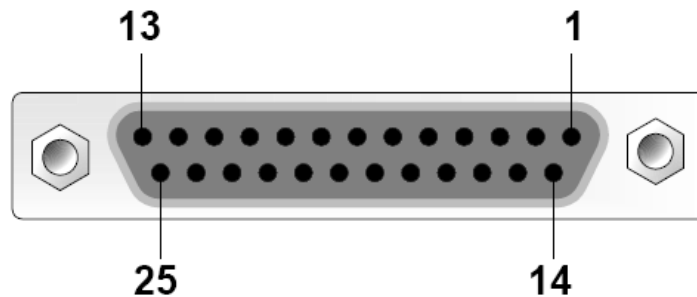


View looking INTO connector as seen on module

We recommend you use high quality screened (twisted pair) cable for the balanced audio connections. LYNX has an optional audio breakout cable which will bring out all audio connections to in line XLR connectors. Model number **R AC M25-8**

## Audio Output Connections (un-balanced)

Although the module is designed primarily for balanced line audio connections it is possible to make un-balanced audio connections to the module.

**NOTE.** When used in this manor certain technical specifications of the module cannot be maintained.

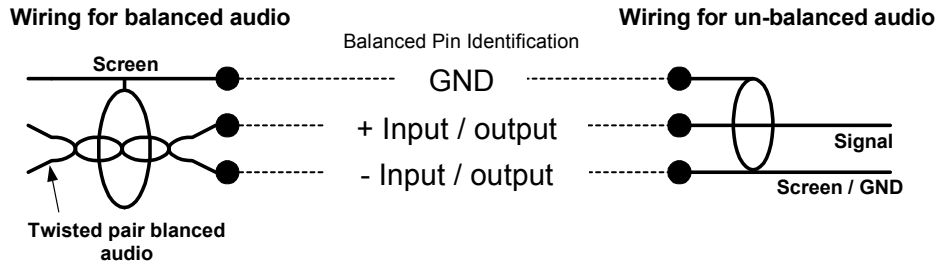

## Installation

If this module was supplied as part of a system it is already installed in the rack enclosure. If the module was supplied as a field upgrade please follow the installation procedure below.



**NOTE** Observe static precautions when handling card. Please see ESD warnings on Page 5.


Each Card Module is supplied with a rear connection panel and two mounting screws. Please follow the following procedure for installation of the card module into the Series 5000 Card Frame.

1. Select a slot in the card frame where the CardModule will be located.
2. Remove the blank connection panel from the rear of the rack (if fitted)
3. Install the rear connection panel using the screws supplied. Do not tighten the screws fully
4. Slide the card module into the card frame and carefully check the CardModule connects to the rear connection plate. The card should fit easily and should not require excessive force to insert, if you feel any resistance, there could be something wrong with the rear connection panel location. Do not try and force the connection this may damage the connectors. Remove the rear connection panel and check alignment with the CardModule.
5. Insert and remove the CardModule a few times to ensure correct alignment and then tighten the two screws to secure the rear connection plate.

## Settings and Control

The C DX 5624 module has an integrated micro-controller, which enables the module to be configured and controlled locally using the multifunction switch and 4 character dot matrix display (or from remote using a GUI interface when using one of the optional controllers and control software).

Once set, all settings are automatically saved in non-volatile internal memory. (Flash RAM) The module will always recall the last used settings.

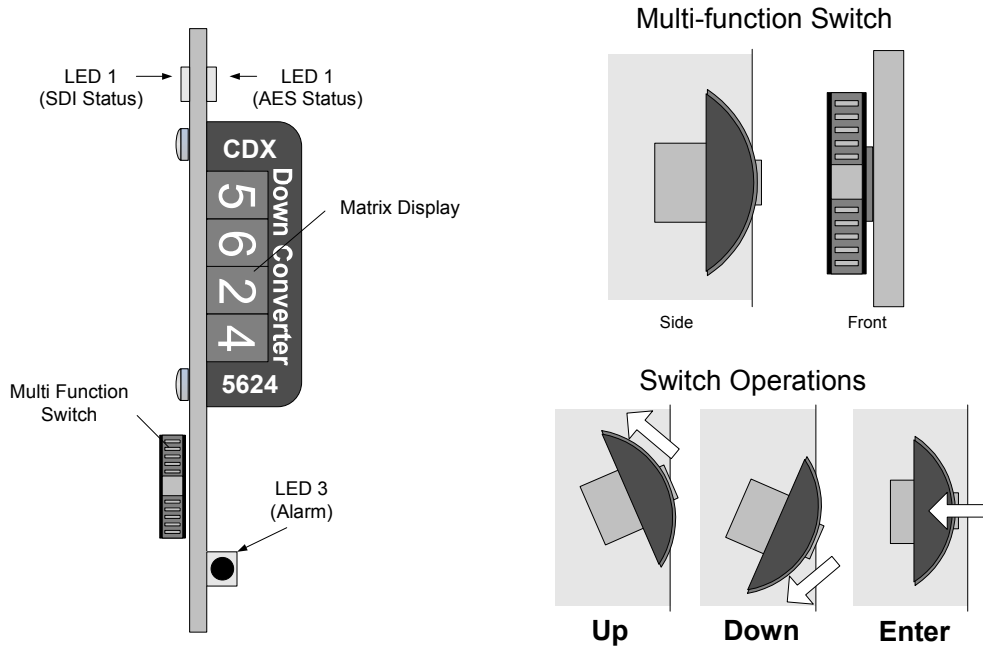

### Multi Function Switch

The CardModule is equipped with a multi-function switch located on the front bottom edge of the card. (See above)

### Using the Local Display Menus

Making local adjustments to the module is done using the multifunction switch and the integrated 4-character dot matrix display. The menu system is layered, and navigation through the system is done using the **UP** and **DOWN** functions of the switch. **ENTER** is used to move between menu levels and also enter a selection.

Switch Function	Operation
UP	Move UP within a level
DOWN	Move down within a level
ENTER	Change levels / Make selection

## Menu Structure

The Menu structure is defined in the next table, and should be used when navigating through the system.

**ENTER** moves between levels

**UP/DOWN** moves between items within the level

When you enter a new setting the system will jump back one level in the menu system.

- The “back” selection in the menu structure will take you back one level when selected.
- When an item is selected which has several setting possibilities the first value displayed will be the value currently stored in the system. The order of the available settings for any menu item in the table supplied does not represent the order the settings will actually be displayed.
- If left unattended, the menu will default to the root display after a preset timeout.

LEVEL 1	LEVEL 2	LEVEL 3	LEVEL 4	LEVEL 5	LEVEL 6	DESCRIPTION
CDX 5624	↘					Root Display
	OUT	↘				
		DVID	↘			Dig Output Video
			SD			SDTV
			S/HD			Input Loop Through
			back			
		DNCV	↘			Down Converter Mode
			LBOX			Letterbox
			FILL			Stretch to fill
			CCUT			Center Cut
			back			
		CSCV	↘			Color Space Conversion
			OFF			Transparent (bypass)
			ON			709>601 convert
			LUMA off			Convert only Chroma
			back			
		APRT	↘			Aperture Correction
			OFF			No Aperture Correction
			ON	↘		Aperture Correction ON
				-30..+80		Set Level
			back			
		AVID	↘			Analog Video
			FRMT	↘		Format
				CVBS		3 x Composite
				YUV		1 x YUV
				SVID		1 x YC + 1 x CVBS
				RGB		1 x RGB

					back		
					PED	Remove Pedestal	
					OFF	Pedestal removed	
					ON	Pedestal added	
					back		
					FILT	Filter Selections	
					LUM	Luminance	
					LP	Low Pass	
					NTCH	Notch	
					EXT	Extended Filter	
					CIF	CIF Filter	
					back		
					CHRO	Chroma Filter	
					0.65	0.65MHz	
					1.00	1.00MHz	
					1.30	1.30MHz	
					2.00	2.0MHz	
					3.00	3.0MHz	
					CIF	CIF Filter	
					QCIF	QCIF filter	
					back		
					back		
					LIM	Luma undershoot Limiter	
					OFF	Off	
					-1.5	-1.5 IRE	
					-6.0	-6.0 IRE	
					-11	-11 IRE	
					back		
					LINE	Active Line Duration	
					CCIR	CCIR 601	
					ITUB	ITU-B 470	
					back		
					VBI	Vertical Blanking	
					BLNK	Blank Completely	
					TRA	Pass transparently	
					back		
					LEVL	Level Adjustments	
					LUM	Luminance	
						0 ... 1.5	
					CHRO	Chrominance	
						0 ... 2.0	
					BLK	Black Level	





			PLL			Phase Lock Loop
			BAR			ColorBars
			BRED			Color bars / Red
			BLUE			Blue Screen
			back			
			STD			Test Pattern Standard
			525			525 (SDTV)
			625			625 (SDTV)
			720p 60			720 P 60Hz
			720p 50			720 P 50Hz
			1080i 60			1080i 60Hz
			1080i 50			1080i 50Hz
			back			
			back			
			RSET			Factory Reset
			NO			No
			YES			Yes
			back			

## LED Status Indicators

The C DX 5624 module has LED indicators that serve as alarm and status indication for the module. Function is described below.

### SDI Status LED 1


LED Color	Indication
Green	Input 1 SDI Present
Red	Input Missing

### AES Status LED 2

LED Color	Indication
Green	AES 1 and AES 2 Present
Yellow	Only one AES Present
Red	No Audio Present

### Alarm LED 3

LED Color	Indication
Green	Video Present PLL Locked
Yellow	Test Pattern Selected
Red	No Video Present / PLL Unlocked

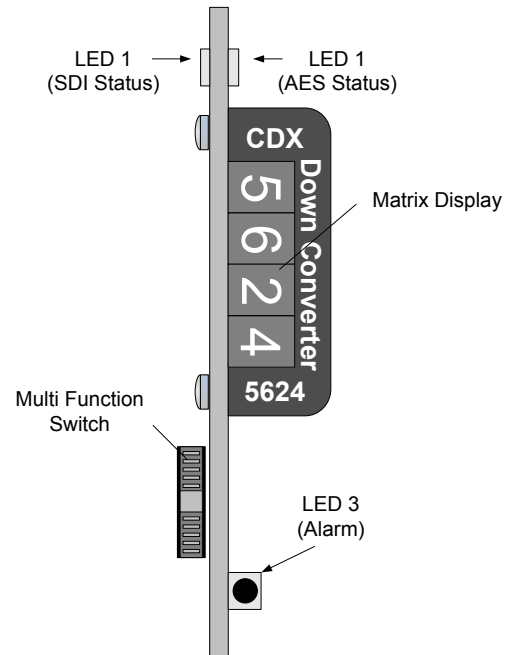


# Control System GUI

All LYNX CardModules support a computer interface which allows setting the modules parameters using a simple GUI interface. Access to all standard features (and in some cases) extended features is possible using this interface.

Access to the GUI requires the use of the optional LYNX control system

**Note.** Any settings made using the control system overrides any local settings made on the module. All settings are stored in internal flash ram and will survive power cycles and long term storage.

The GUI screenshots below show the settings and adjustments possible for the C DX 5624 CardModule.

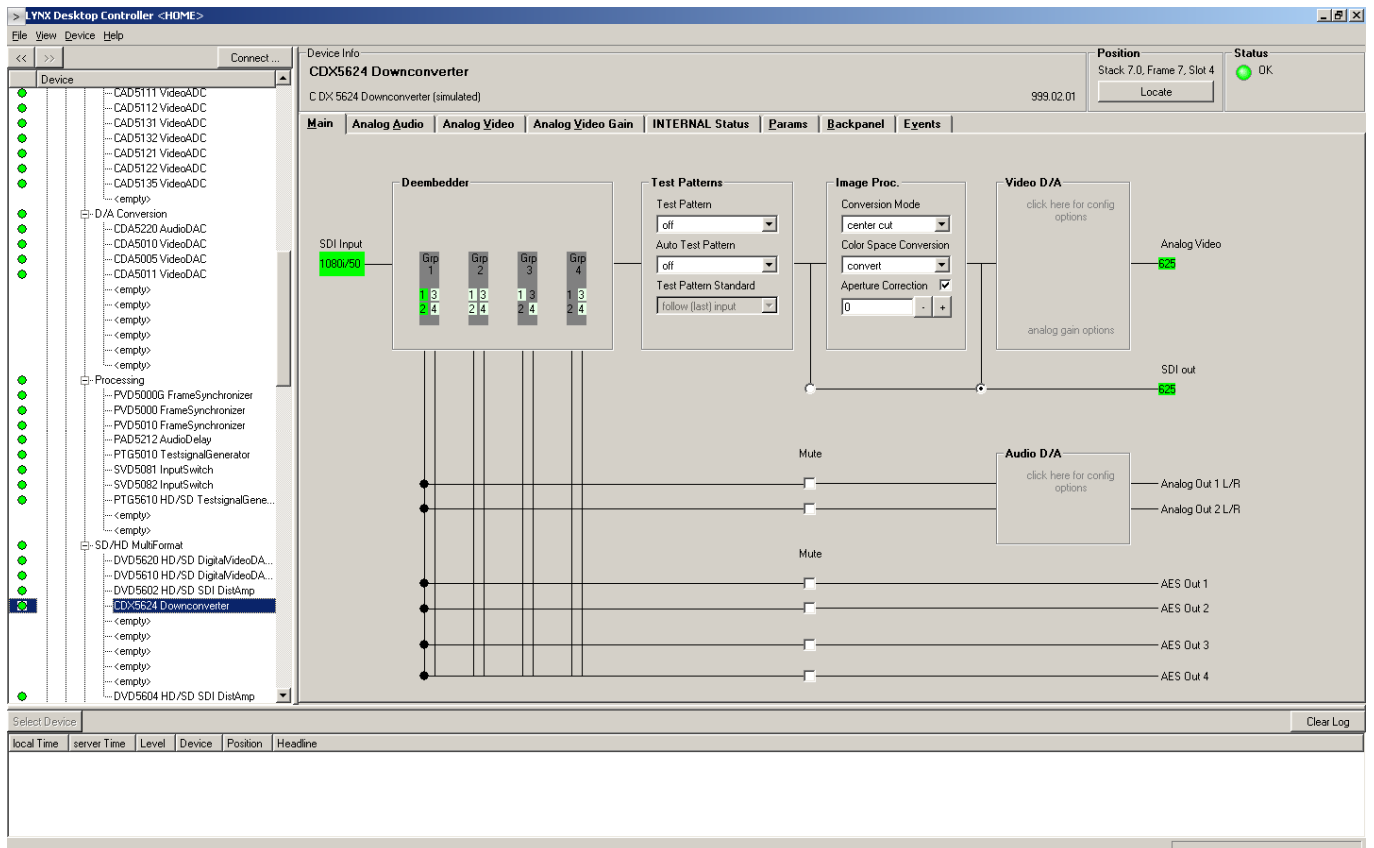

The above screenshot shows the complete module GUI. The Device info area contains information about the module including name and firmware revision. If used as part of a larger system (using the LYNX central control system) the modules position and physical location is displayed above the “locate” button.

**Note.** The Locate function us a tool used to quickly identify a module in larger systems. Selecting “locate” will flash the module alarm LED yellow. (does not effect module operation)

The first screen you see when the module is selected is the **Main** tab this is a graphical representation of the modules function and signal flow (left to right). Clicking on processing boxes where shown will link to other GUI screens with controls for these specific functions.


The area at the bottom of the screen is the error log. Any fault condition will be timestamps and entered into the log (as long as the controller / adapter is connected)

There are a number of Tabs associated with each Module which splits up the modules settings into a number of separate screens. The various GUI screens and functions are described below.

## Main Tab

This screen is the main GUI interface and is presented first when the module is displayed in the GUI. The layout replicates function and the signal flow if from left to right.

Selections are made using onscreen sliders, radio buttons, drop down selections and checkboxes.

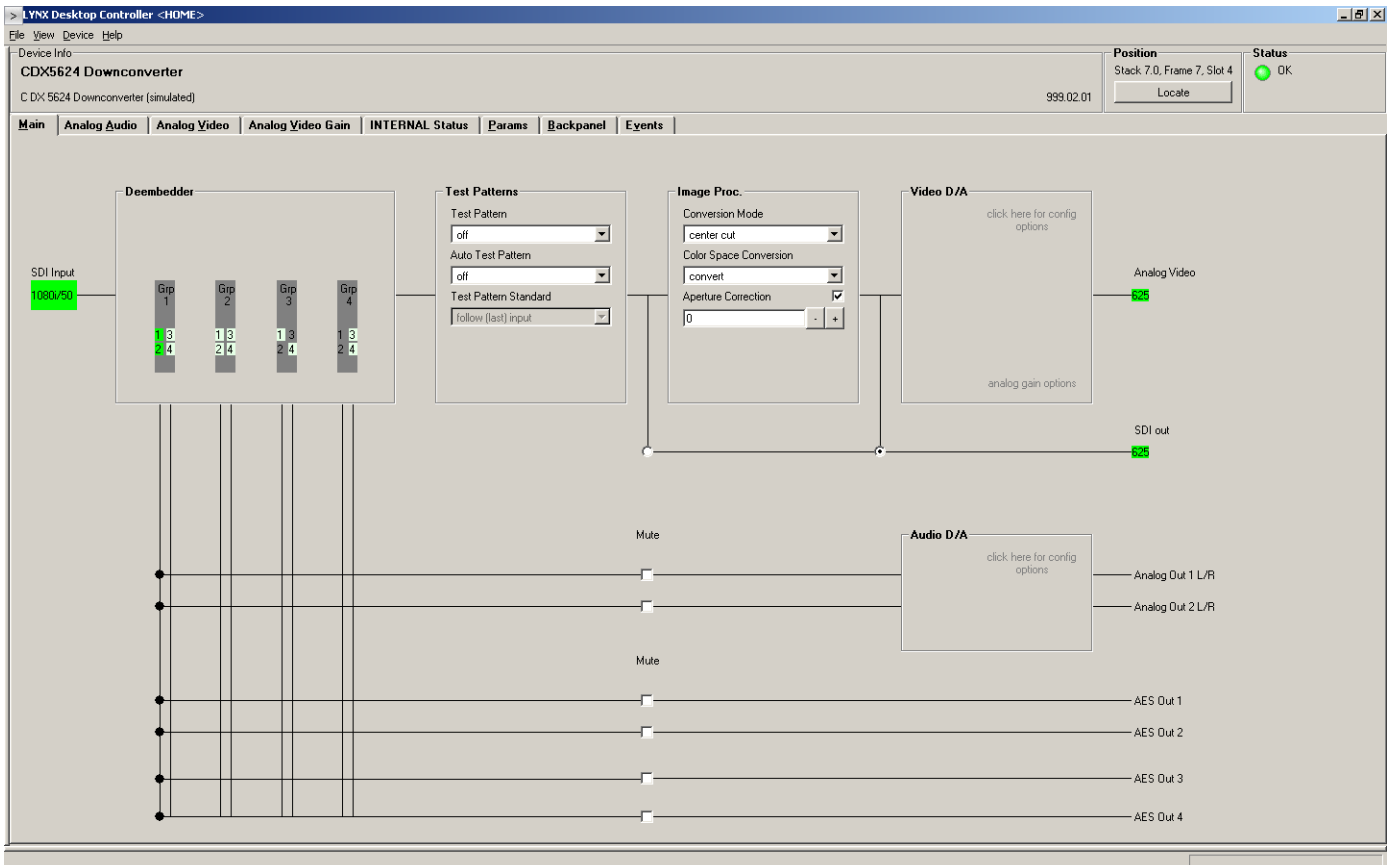

### Input Detection

On the left the SDI input is detected and the format displayed on screen (in green)

### Deembedder

The first stage is the audio deembedder. The four audio groups are represented by the dark grey boxes and the individual audio signals within each AES channels are shown as being present when highlighted green. This is a good reference for checking embedded audio status on the incoming SD/HDTV SDI stream.

All AES channels (8) are available on an audio crossbar which permits selection of AES channels for the digital and analog audio output stages. (Selected using the radio buttons). Each selected AES stream can be individually muted using the checkboxes provided.

Although not graphically shown, all AES channels (8) are fed through a fixed 1 Frame delay and embedded back into the down converted digital outputs.

**Test Pattern**

This is where the internal test pattern can be switched on via the drop down selections. This will override any input signal and is present on all outputs (analog and digital).

Selections provided are:

- OFF (*default*)
- Color bars
- Color Bars over Red
- Full field Black
- Pathological PLL/EQ
- Blue Screen

**Auto Test Pattern**

When the input signal is lost you can configure the module to automatically switch in a test pattern. Selections provided are.

- OFF (*default*)
- Color bars
- Color Bars over Red
- Full field Black
- Pathological PLL/EQ
- Blue Screen

**Test Pattern Standard**

Using this drop down selection it's possible to configure the standard of the internal test signal. This can be preset to follow the last input standard connected or forced into any independent standard which is useful if using the module as a test pattern source.

Possible standard selections are:

- Follow Last Input (*default*)
- 525 / 59.94Hz
- 625 / 50 Hz
- 1080i / 59.94Hz
- 1080i / 60Hz
- 1080i / 50Hz
- 720P / 59.94Hz
- 720P / 60Hz
- 720P / 59.94Hz

**Down Converter Mode**

This drop down selection defines the aspect ratio reproduction for the converted outputs. Selections are

- Center Cut 4:3 (*default*)
- Letterbox
- Stretch to Fill

**Color Space Conversion**

This drop down selection configures the color space converter. There are three possible settings

- Bypass (Passes the color space on the input)
- Convert (Performs a 709>601 color space conversion)
- Luma in bypass (Only converts the chrominance portion of the signal)

### Aperture Correction

We provide a horizontal aperture corrector for the converted outputs which permits the sharpening or softening of the SDTV outputs (a slight roll off in high frequency is a normal part of the down conversion filtering process). The checkbox can be used to switch aperture ON and OFF. (ON= Default). When set to ON a small preset amount of correction is applied to produce a flat frequency response on the outputs. When set to OFF all Aperture correction is removed.

The amount of aperture correction is adjustable (from the factory preset) range + 30 to -80. Adjustments in the positive direction will sharpen the image and the negative direction will soften the image.

### SDI output routing

There are two small radio buttons which can be used to change the SDI digital outputs. One selection takes the signal before the down converter and will provide two re-clocked outputs of the incoming SDI signal. The other selection (default) provides two converted digital outputs.

### Output Standard

The output standard is indicated in green for the analog and digital outputs.

#### Note

*The down converter will automatically select the correct output standard depending on the connected input standard. For example if a 50Hz input signal is detected then a 625 PAL output will be provided. Likewise if a 59.94Hz or 60Hz input is detected then a NTSC 59.94Hz output will be provided.*

## Analog Video Tab

Main	Analog Video	Analog Video Gain	Backpanel	Events
<b>Output Format</b>				
Output Format		CVBS		
NTSC format options				
add Pedestal		<input type="checkbox"/>		
Pal M		<input type="checkbox"/>		
PAL format options				
Pal N		<input type="checkbox"/>		
<b>Output Filter</b>				
Luminance		Low Pass		
Chrominance		0.65 MHz (LP)		
<b>Output Options</b>				
Blank VBI		<input type="checkbox"/>		
Chrominance off		<input checked="" type="checkbox"/>		
Burst off		<input type="checkbox"/>		
Line Duration		CCIR 601		
<b>Special Functions</b>				
Luma Delay		222 ns		
Chroma Delay		148 ns		
Double Buffering		<input type="checkbox"/>		

This GUI screen is where you would access all the controls for the analog to digital conversion and proc functions

### Output Format

Use this drop down selection to configure the analog outputs. Selections are

- 3 x CVBS
- 1 x CVBS + YC
- YUV
- RGB

The “Add Pedestal” function is enabled when a NTSC is being provided and checking this box will add a 7.5IRE Pedestal to the analog outputs.

### NTSC Output Options

There are two check boxes provided which are for configuration of the video signal when in NTSC (525) output mode.

Add pedestal (when selected) will add a 7.5IRE pedestal to the analog outputs.

PAL M will configure the NTSC outputs to the PAL M standard.

### PAL Output Options


There is one selection possible when in PAL (625) mode. When selected this will format the outputs into the PAL N video standard.

### Luminance Output Filter


This drop down selection allows the selection of the Luminance filtering characteristics for the analog to digital converter. Settings are listed below followed by the filter response characteristics.

- Extended Mode (default)
- Notch Filter
- Lowpass
- CIF


Extended Mode (Default)

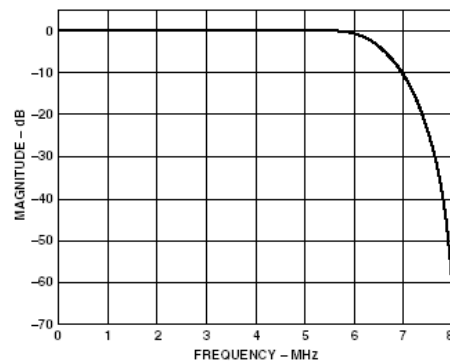


Notch Filter (PAL)

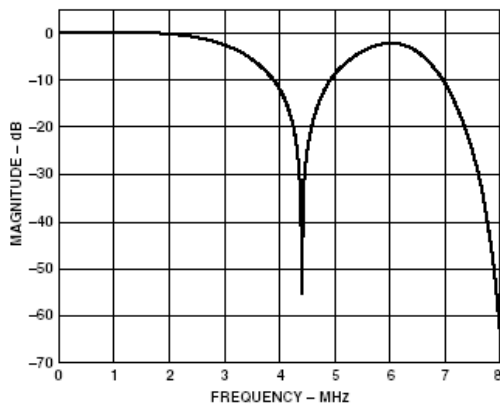

Low Pass (PAL)

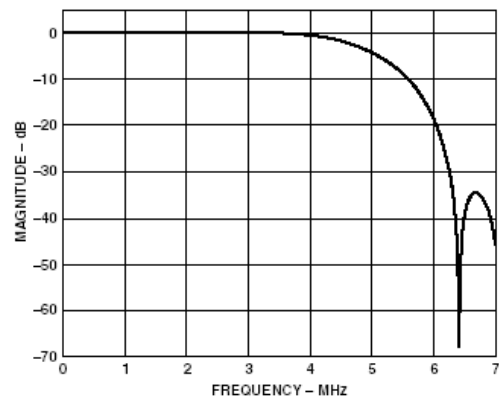

CIF (PAL)

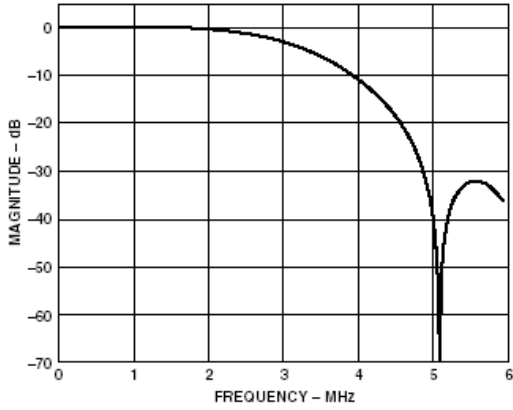


**Chrominance Filter**


It's also possible to configure the filter response for the chrominance portion of the signal. The drop down box provides the following selections and the filter characteristics are shown for each.

- 3.0 MHz (default)
- 0.65 MHz
- 1.0 MHz
- 1.3 MHz
- 2.0 MHz
- CIF
- QCIF


3.0 MHz (Default)

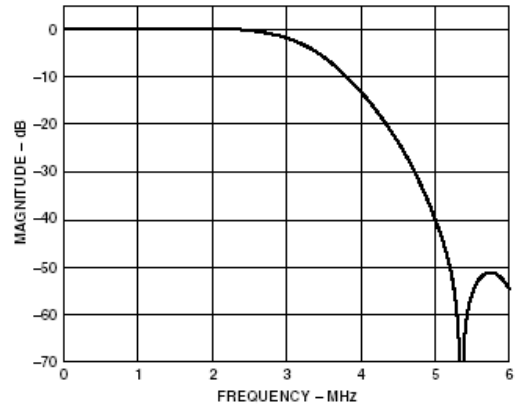


0.65 MHz

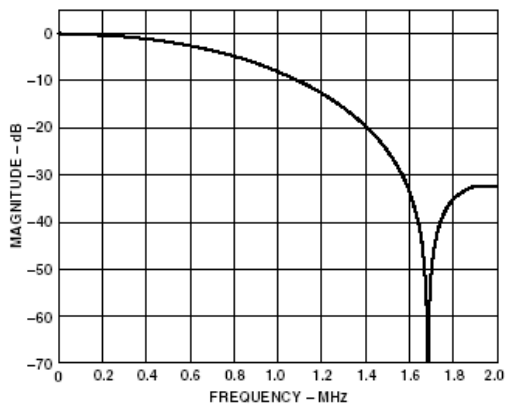

1.0 MHz

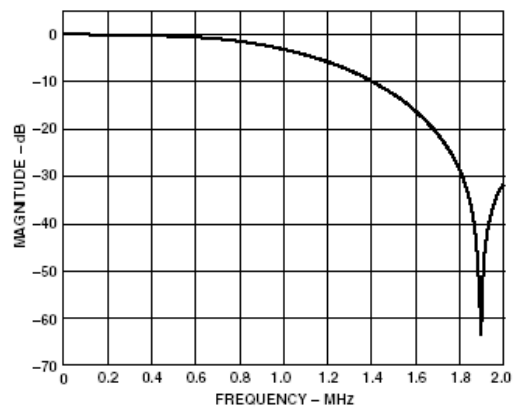

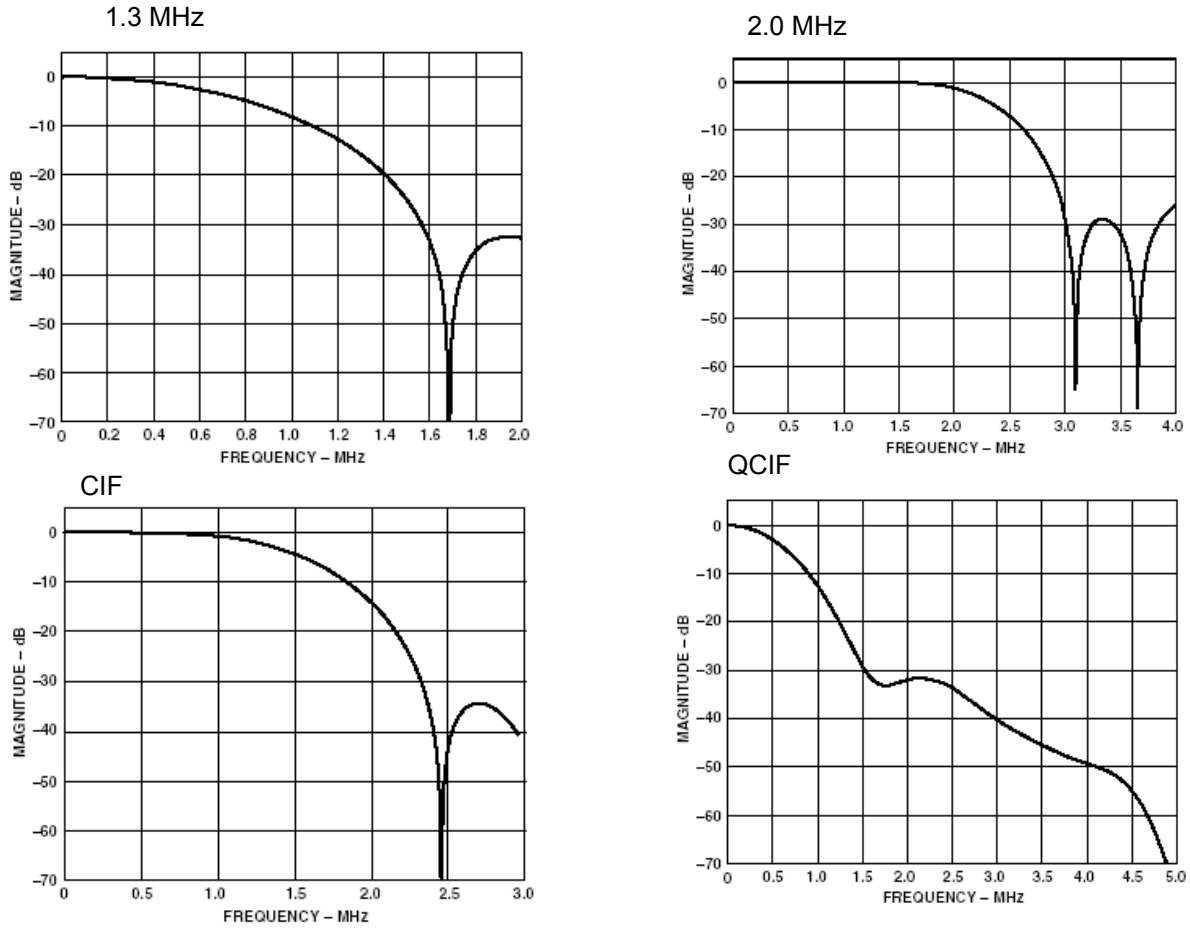

### Output Options

**Blank VBI** – When selected this will completely blank any information in the vertical interval. Left unchecked the module will pass any VBI information transparently. (only valid for the bypass channel, processed outputs (down converted) will have the vertical interval blanked)

**Chrominance off** – When selected this will turn off the chrominance part of the signal and a luminance only (black and white) image will be provided.

**Burst off** – When in composite mode this will remove the burst portion of the composite signal from the composite outputs.

### Active Line Duration

The active line length can be switched between analog and digital blanking. Selections provided are:

- ITU-B 470 (702 pixels active) = analog blanking
- CCIR 601 (720 pixels active) = digital blanking



## Special Functions


These functions are for specialized use only and should be left set to the factory defaults unless you are sure you need to adjust these parameters.

**Luminance Delay** – This allows for the delay of the Luminance signal relative to sync (and Chroma) by the time period specified (default 0)

**Chrominance Delay** – This allows for the delay of the Chrominance signal relative to sync (and Luma) by the time period specified (default 0)

**Double Buffering** – This is double buffers the video signal so that any changes made to the module settings over the remote Ic2 interface occurs in the vertical blanking interval.

## Analog Video Gain Tab

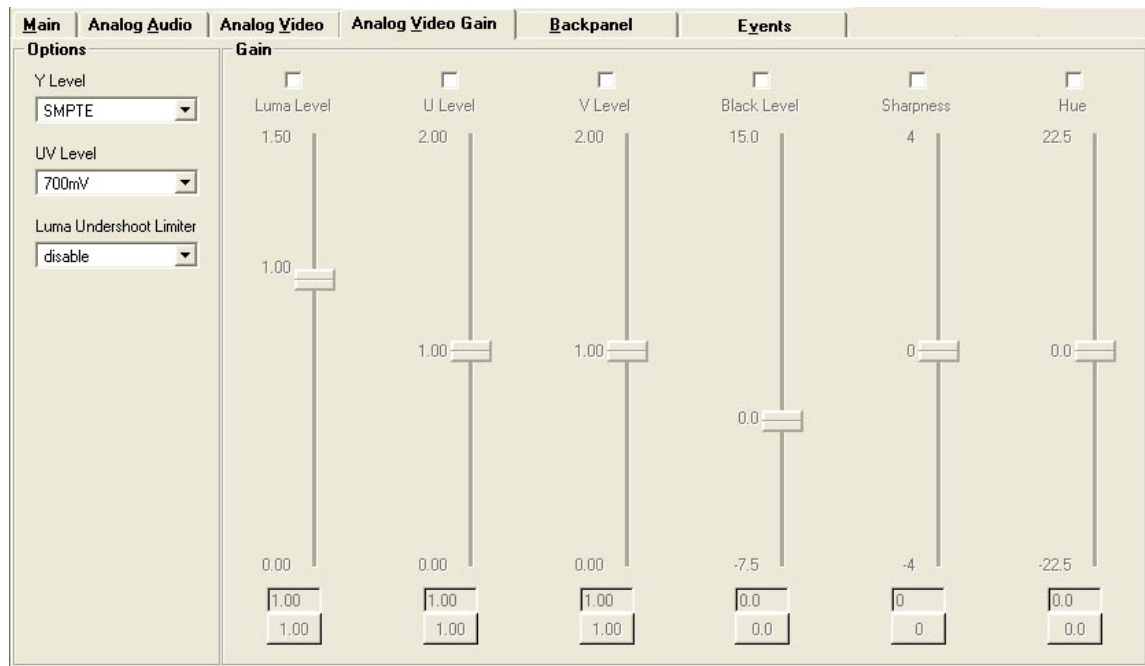

This GUI screen provides access to the internal video processing amplifier where gain levels can be adjusted and set. Default is a null setting for all adjustments.

**Note.** The buttons at the bottom of each slider will return the settings to the factory preset null setting.

### Options

**Y level** – The Y level can be changed, which depends on the application. Possible settings are:

- SMPTE (default)
- BETACAM

**UV Level** – The UV levels used can be preset which depends on the application. Possible settings are

- 700mv
- 1000mv
- 648mv

### Luminance Undershoot Limiter

With this selection is possible to limit the undershoot of the luminance portion of the signal. The following limits are possible selected by the drop down box:

- Disable (default)
- -1.5 IRE
- -6.0 IRE
- -11 IRE

### Video Adjustments

A bank of six on screen sliders is provided for the adjustment of various video parameters. These settings apply only for the analog video outputs. Settings provided are:

- Luma Level
- U Level
- V Level
- Black Level
- Sharpness
- Hue

To operate a slider it must be enabled by selecting the check box above, dragging the slider will change the desired level. To return a slider to the factory default (null) setting click the button below the slider.

**Note.** Sharpness is a different adjustment to the Horizontal Aperture Correction provided earlier in the processing chain.

## Analog Audio Gain Tab

The screenshot displays the 'Analog Audio Gain Tab' interface, which is divided into several sections:

- Main:** Contains a list of 'FS-Level' options: 12 dBu, 15 dBu (selected), 18 dBu, 20 dBu, 22 dBu, and 24 dBu. Each option has a radio button next to it.
- Analog Video:** This section is currently inactive, indicated by a greyed-out background.
- Analog Video Gain:** This section is also inactive.
- Backpanel:** Contains three checkboxes: 'Swap Left/Right', 'Deemphase', and 'Mute', all of which are currently unchecked.
- Events:** This section is currently inactive.
- Analog Out 1 L/R:** This section contains two gain sliders, 'Gain 1L' and 'Gain 1R'. Both sliders are currently set to 0.0. Below each slider is a '0.0' button. At the bottom of this section are two more '0.0' buttons.
- Analog Out 2 L/R:** This section contains two gain sliders, 'Gain 2L' and 'Gain 2R'. Both sliders are currently set to 0.0. Below each slider is a '0.0' button. At the bottom of this section are two more '0.0' buttons.

This GUI screen provides access to all the analog audio adjustments and settings. The gain adjustment provided is +/- 3dB from the selected Full Scale Level (FS Level)

**FS Level**

This sets the full scale level (scaling) of the analog audio signal. This can vary by region and installation. Please check with your studio engineer what FS level is defined as standard and make the appropriate selection. Default in 18dB (which is typical for European markets)

**Analog Out 1 and 2 Left and Right Adjustments**

Two identical adjustment panels are provided for the stereo analog audio outputs.

**Swap Left and Right** – When selected this will swap the left and right channels

**Deemphasis** – When selected this will apply deemphasis to the audio output.

**Mute** – When selected this will mute the analog audio outputs (silence)

**Gain Adjustments**

Adjustable gain is provided via two sliders, one for the right and one for the left channel. These can be moved on screen to the desired settings. The two sliders can be "ganged" together at any time by selecting the linking checkbox below the sliders. To return the sliders to 0 (null) press the button below the sliders.

***Note.** The zero or null setting for the sliders will set the audio to the FS level defined. The adjustment provided is +/- 3dB from the selected FS level.*

**Reset Factory Defaults**

If you are unsure of the settings or have managed to set the module into a strange mode of operation and wish to recover the factory defaults - this can be done by selecting **Device > Reset Factory Defaults** from the Device drop down menu at the top of the GUI.

# Specifications

<b>Video Input</b>	
Signal Type	Serial Digital Video (SDI) SMPTE 292M, 344M, 259M with automatic input standard detection
Supported Formats	525/59.94Hz 625/50Hz 1080i/59.94Hz/60Hz/50Hz 720P/59.94Hz/60Hz/50Hz
Input Impedance	75 $\Omega$
Input Level	0.8v
Connector	BNC
Return Loss	>15dB (270Mbits) >10dB (1.485Gbits)
<b>Digital Video Outputs</b>	
Signal	2 x Serial Digital Video (SDI) SMPTE 292M, 344M, 259M
Output Impedance	75 $\Omega$
Output Level	0.8v pp +/- 10%
Return Loss	> 15dB (1.5 Ghz)
Connection	BNC
Jitter	<0.20 UI (270 Mbits) <0.25 UI (1.485Gbits)
<b>Analog Video Outputs</b>	
Modes	3 x CVBS or 1 x CVBS + YC or 1 x YUV
Return Loss	>35dB (5.75MHz)
Signal to Noise	> 60dB
D/A Conversion	10 bits and 54 MHz (4x over sampling)
<b>Digital Audio Outputs</b>	
Signal	4 x AES3 (balanced)
Impedance	110 $\Omega$
Connectors	25 pin SubD
Mode	Select any 4 AES signals from de-embedded audio (8xAES)
<b>Analog Audio Outputs</b>	
Signal	4 x Balanced analog audio (2 x Stereo L+R)
Connector	25 pin SubD
Dynamic Range	>90dB
Signal to Noise	>85dB
Conversion	24 bit
Output level	-39dB.....+24dB in 0.5dB increments (default 18dB)
<b>Electrical</b>	
Operating Voltage	+ 12 VDC
Power Consumption	9 W
Safety	IEC 950 / EN 60950 / VDE 0805
<b>Mechanical</b>	
Size	283mm x 78mm
Weight	CardModule 150g, connector plate 70g
<b>Ambient</b>	
Temperature	5°C – 40°C Maintaining Specifications
Humidity	90% non condensing

# Service

## Parts List

Due to the very dense design and high level of integration there the module is not user serviceable. Please contact LYNX for repairs or to request an exchange unit.

There is one consumable part used on this module which is the cooling fan. A service kit is available to exchange the fan. Ordering information below.

Part type: ***Cooling Fan Service Kit Series 5000 CardModules***

## Technical Support

If you are experiencing problems, or have questions please contact your local distributor for further assistance.

Technical support is also available from our website.

Please do not return products to LYNX without an RMA. Please contact your authorized dealer or reseller for more details.

More detailed product information and product updates may be available on our web site:

[www.lynx-technik.com](http://www.lynx-technik.com)

## Contact Information

Please contact your local distributor; this is your local and fastest method for obtaining support and sales information.

LYNX Technik can be contacted directly using the information below.

**Address**                      LYNX Technik AG  
   Brunnenweg 3  
   D-64331 Weiterstadt  
   Germany.

**Website**                      [www.lynx-technik.com](http://www.lynx-technik.com)

**E-Mail**                         [info@lynx-technik.com](mailto:info@lynx-technik.com)

LYNX Technik manufactures a complete range of high quality modular products for broadcast and Professional markets, please contact your local representative or visit our web site for more product information.

