

LYNX

D VD 5820

SDTV / HDTV

3G

SERIES 5000

CardModules

3Gbit Dual SDI/ASI Distribution Amplifier

Description

The DVD 5820 can be configured as a single channel 1>8 or dual channel 1>4 SDI distribution amplifier. Each channel can be set to relocking or non-relocking mode. This module is ideally suited for demanding digital multi-format broadcast and professional applications.

The module auto-detects the input video standard with support for all SDI video formats up to 3Gbit/s. In non re-clocked mode the module will transparently pass any data between 15Mbit/s and 3Gbit/s. Support for ASI/DVB and SMPTE 310 signals is also provided.




In 1>8 mode either input can be mapped to the 2 banks of 4 outputs. The optional mechanical relay will connect the inputs to one of the outputs in the event of a power failure.

Local settings are provided via an integrated dip switch on the card edge.

Remote control, status monitoring and error reporting is possible when using the LYNX control system.

Features

- Supports all SDI video formats
- Supports ASI/DVB and SMPTE 310 streams
- Dual channel 1>4 or flexible 1>8 mapping
- Reclocking or non-relocking mode (selectable).
- Auto-detect input video standard.
- Transparently pass data between 15Mbit/s and 3Gbit/s in non re-clocked mode.
- Microprocessor controlled with internal flash ram for storing configuration
- Input presence detection with LED indication
- Optional power fail relay connecting input to output
- Remote control, status monitoring and error reporting when used with LYNX control system
- Full SNMP support when used with master controller option
- Hot Swappable

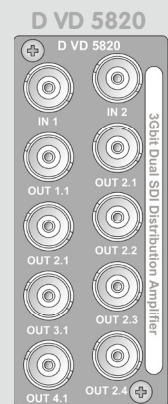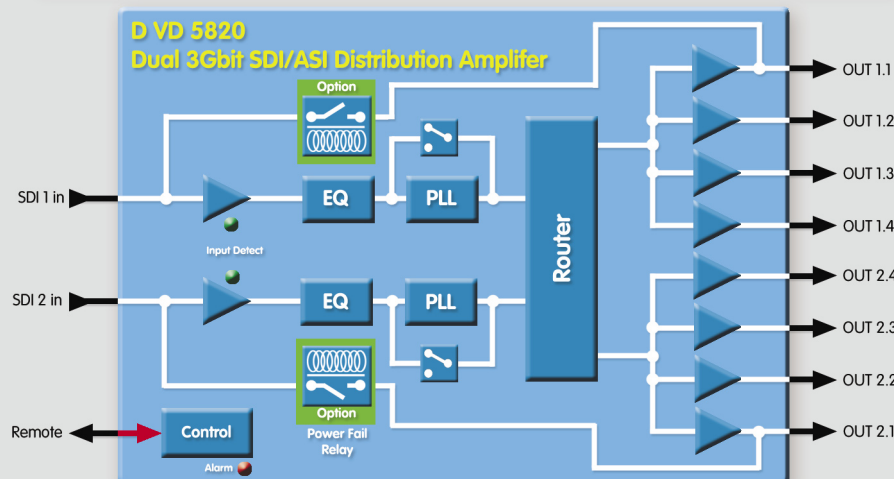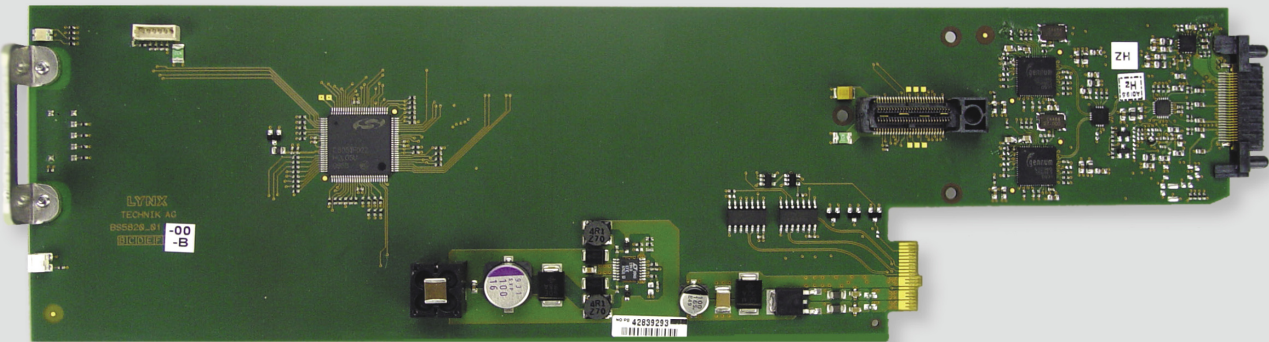

Backplane

Distribution

DISTRIBUTION D VD 5820

3Gbit Dual SDI/ASI Distribution Amplifier

Specifications

Video Inputs	
Signal Type	Serial Digital Video SMPTE 259M, 292M, 424M DVB-ASI and SMPTE 310
Video Standard	All formats (270Mbit/s through 2.97Gbit/s)
Input level	0.8 v peak to peak
Input Impedance	75 Ohms
No. Of inputs	2
Connector	BNC
Return loss	> 15dB (1.485Gbit) > 10dB (2.97Gbit)

Video Outputs	
Signal Type	Serial Digital Video SMPTE 259M, 292M, 424M DVB-ASI and SMPTE 310
Video standard	Follows input
Output level	0.8 v peak to peak
Output impedance	75 Ohm
No. Of Outputs	8 (2x4)
Connector	BNC
Return loss	> 15dB (1.485Gbit) > 10dB (2.97Gbit)
Jitter	< 0.20 UI (270 MHz) < 1.0 UI - Timing Jitter - (1.485Gbit - 2.97Gbit) < 0.20 UI - Alignment Jitter - (1.485Gbit - 2.97Gbit)

Performance	
Cable equalization	Up to 250M using Belden 8281 (270Mbit) Up to 140m using Belden 1694A (1.485Gbit) Up to 80m using Belden 1694A (2.97Gbit)
Control	Local settings using on board dip switches. Remote control possible when used with LYNX controller
Status monitoring (LED)	Signal presence for each input plus general alarm

Operation modes	
Single channel	Single 1>8 (either input can be mapped to the 8 outputs)
Dual channel	Dual 1 > 4
Re-clocking	Clocked or non re-clocked operation (each channel, selectable)

Electrical Specifications	
Operating Voltage	12 VDC
Power Consumption	< 4W
Safety	IEC 60950/ EN 60950/ VDE 0805

Mechanical	
Size	283mm x 78mm
Weight	CardModule 120g, connector plate 50g

Ambient	
Temperature	5°C to 40°C Maintaining specifications
Humidity	90% Max non condensing

Specifications subject to change

Settings and Control

Local Settings	
Re-clocking	clocked / non re-clocked
Modes	Dual channel = 2x1>4 Single channel = 1x1>8 (using input 1) Single channel = 1x1>8 (using input 2)

Settings Available from Control System	
Local controls duplicated. No additional parameters provided via the control system	

On Board Indicators / LEDs	
Input 1 Present / No Input	
Input 2 Present / No input	
General Alarm Indicator – 3 Color	

Options

OH DVD RL2 - Bypass Relay	
Optional mechanical relay which will connect SDI IN 1 to SDI OUT 1.1 and SDI IN 2 to OUT 2.1 in the event of a power failure.	

Ordering Information

Model #	Part Number	Description	Includes
D VD 5820	5155105820	3Gbit Dual SDI Distribution Amplifier	CardModule, Rear termination Panel, + Mounting Screws, and Reference Manual
OH DVD RL 2	5155105800	Bypass Relay	Rear termination panel with integrated mechanical relay.