

# PowerFilm<sup>®</sup>

MADE IN THE USA

## SOLAR

## 120 Watt Foldable Solar Panel (30V)

The 120 Watt Foldable Solar Panel is lightweight, durable and extremely portable.

The solar panels are mounted to weather resistant fabric that quickly folds for storage and unfolds for use.

Unmatched durability allows for use in the harshest environments and a panel that works even after a portion is damaged.

This compact panel fits easily into most backpacks and is the perfect accessory to provide power for a wide range of electronics.

The 120 Watt Foldable Solar Panel keeps you connected, powers your outdoor life, and helps you get more out of your outdoor adventures.

### Tips For Best Use:

- Angle the solar panel toward the sun for best results.
- Always store in a cool dry environment.
- Not designed for use in the rain.
- Allow time to air dry before packing if the panel is wet.
- Routinely clean the solar panel to ensure best performance.



### Benefits Include:

- Compact, lightweight, durable - military tested (MIL-STD-810G).
- Easy to deploy and easy to store.
- Provides some power even in hazy and shaded environments.
- Light sensitive technology turns on early in the day and stays on later in the day.
- Designed, engineered and manufactured in the United States.

### Certifications:

- CE
- MIL-STD-810G
- RoHS
- Berry Amendment Compliance

# PowerFilm<sup>®</sup>

## SOLAR

MADE IN THE USA


## 120 Watt Foldable Solar Panel (30V)

### Electrical Characteristics

Rated Voltage at Pmax	30.8V
Rated Current at Pmax	3.6A
Open Circuit Voltage	43.7V
Short Circuit Current	4.6A

### Physical Characteristics

Part Number	F32-3600
Folded Dimensions	14.5 x 14.0 x 3.0 inches 368.3 x 355.6 x 76.2 mm
Unfolded Dimensions	86.5 x 55.0 inches 2,197.1 x 1,397.0 mm
Weight	6.3 lbs 2.9 kg

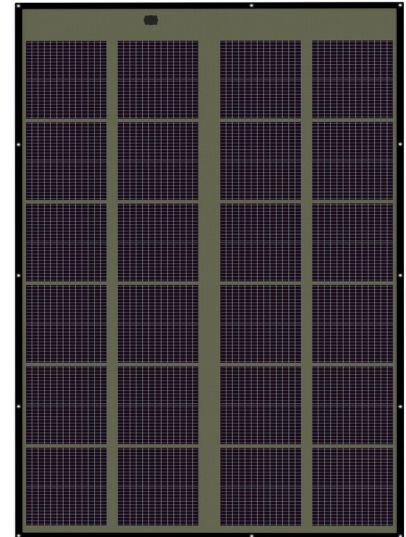

86.5 inches

55.0 inches

**Standard Colors:** Khaki  
**Custom Colors:** Black, Digicam, Desert Camo, Woodland

### Thermal Characteristics

Temperature Coefficient for Power	- 0.200 (%/C)
Temperature Coefficient for Voltage	- 0.240 (%/C)
Temperature Coefficient for Voc	- 0.300 (%/C)
Temperature Coefficient for Isc	0.109 (%/C)

### Connectors

**Standard Connector:**  
Aptiv Metri-Pack



**Custom Connectors:**  
SAE  
Barrel  
Anderson Powerpole  
Customer Specified



### IV Curve

