



4K 4 in 1 Indoor / Outdoor IR Bullet

IV-BU4K288MP-FHEN


Features:

- . 4K 4-in-1 camera (HD-TVI/AHD/CVI/CVBS)
- . 4K @TVI/AHD & 5MP@CVI & CVBS video output
- . Fixed lens 2.8mm
- . IR distance: 75ft
- . Support ICR switch, 2D-DNR, Day/night, D-WDR
- . DC 12V IP66



Use the toggle switch to select the four video output modes:

Select your video protocol by switching the positions of the toggle switches per the below diagram. The toggle switches are located at the end of the camera cable

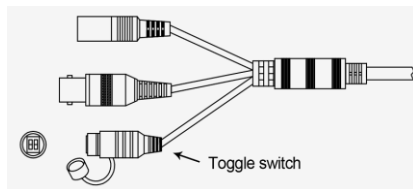

Specification	IV-BU4K288MP-FHEN
Horizontal Resolution	4K@ TVI/AHD & 5MP@ CVI & CVBS
Image Sensor	1/2.8" IMX415 SONY CMOS Sensor,OSD,ICR
DSP	FULLHAN FH8556
Effective Pixels	8.0 Mega Pixels
Signal System	PAL / NTSC
S/N Ratio	≥50dB (AGC Off)
Min. Illumination	Color 0.001Lux@F1.2
	B/W 0.0001 Lux@F1.2
On Screen Display	Yes
Video Output	TVI /AHD (4K@25fps, 5MP /4MP/2MP@30fps); CVI (5MP@25fps, 4MP/2MP@30fps); Analog (1280x576, 1280x480)
Lens	Varifocal Lens 2.8-12mm
Day&Night	EXTERN,COLOR, B&W,AUTO
White Balance	Auto
OSD	Manual/DC Lens,Shutter/AGC/WB,Pict Adjust,Mirror,Day/Night,DNR,BLC/HLC,Motion Detect,Privacy Zone
UTC	Support
White Balance	Auto/Auto-ext/Preset/Manual
Privacy Mask	Off / 0~15 Zones
IR Distance	75 ft
Connector Video	BNC
LED Switch	AUTO
Video Output	TVI / CVI / AHD / CVBS
Power Supply	DC12V±10%
Power Consumption	3W (Max. 3.6W with IR cut filter on)
IP Rating	IP66
Working Temperature/Humidity	-10°C~+60°C, 10%~90% (Built in Heater being optional added for enviroment lower than -20°)
Weight	1.0 kg
Working Humidity	Humidity 90% or less (non-condensing)