

## PoE-X High Temperature Sensor



### General Description

The [Power-over-Ethernet \(PoE\) High Temperature Sensor](#) uses a glass coated platinum RTD transducer to accurately measure temperatures from -50°C to +370°C (-58°F to +700°F). The High Temperature Sensor outputs the ambient temperature in degrees Celsius or Fahrenheit and alerts the user when a temperature threshold is crossed.


### Monnit PoE-X Sensor Features

- Power-over-Ethernet ready (injector hardware required)
- Embedded LEDs for transmission & online condition indicators
- 50,000 sensor message memory (non-volatile)
- Modbus TCP & SNTP v1 interface capabilities
- No PC required (managed through apps and smart devices)
- Remote update capable w/automatic updates
- [Optional 5V DC power supply available](#)

## Technical / Device Specifications

DEVICE SPECIFICATIONS	
Part Number	MNS-P-C1-TS-HT-L03
Communication Hardware	10 / 100 Ethernet Controller
PoE Requirements	Class 1 Device (500mW)
IEEE Standard Compliance	802.3AF-2003 / 802.3AT-2009 Class 1
Operation	Full- and Half-Duplex
Cross-Over Correction	Automatic MDI / MDI-X
Protocols Supported	DHCP, DNS, NTP, UDP, TCP, SNMP, Modbus TCP
Input Power	Supplementary Power Requirement
Cable Connector	RJ45
Supplementary Power Connector	2.1 x 5.5 mm barrel jack, center positive
Device Memory	Up to 50,000 sensor messages; varies based on sensor type. (Sensor messages will be stored in the event of Internet outage and transferred when connection is restored.)
Forced Communication / Reset Hardware	Button
Operating Temperature	-20 to +60°C (-4 to 140°F)
Storage Temperature	-40 to +85°C (-40 to 185°F)
SENSOR SPECIFICATIONS	
RTD Temperature Range (RTD and Cable Only)	-75°C to +400°C ( -103°F to +572°F )
Accuracy @ 25°C	+/- 1° C (1.8° F)
User Calibrated Accuracy	+/- 0.25° C (± 0.45° F)

Response Time	20 sec max
Probe	Stainless steel metal probe tip (5mm diameter, 30mm length) (0.197 in. diameter, 1.18 in. length)
Weight	4.68 oz. (133 g)

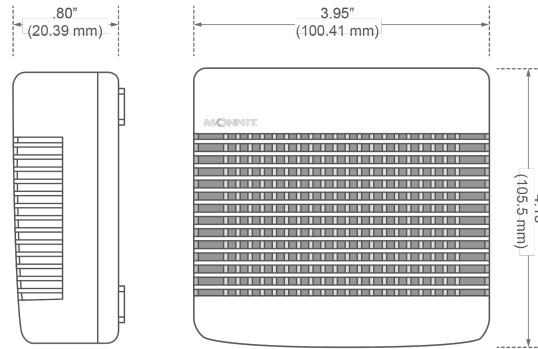

## Example Applications

- Ambient Temperature Monitoring
- Environmental Monitoring
- Smart Machines & Smart Structures
- HVAC Operation & Testing
- Data Center Monitoring
- [And many more](#)

## Notes

### Software Compatibility

Currently Monnit PoE•X Sensors are only supported in iMonnit Online.

For more information about our products or to place an order, please contact our sales department at 801-561-5555. Visit us on the web at [www.monnit.com](http://www.monnit.com).



Monnit Corporation  
 3400 South West Temple • Salt Lake City, UT 84115 • 801-561-5555  
[www.monnit.com](http://www.monnit.com)

## Change Log

Revision	Author	Date (yyyy/mm/dd)	Change
1	K Detro	2020/06/20	Original release.
2	K Detro	2021/08/30	Removed entry about Enterprise compatibility.