
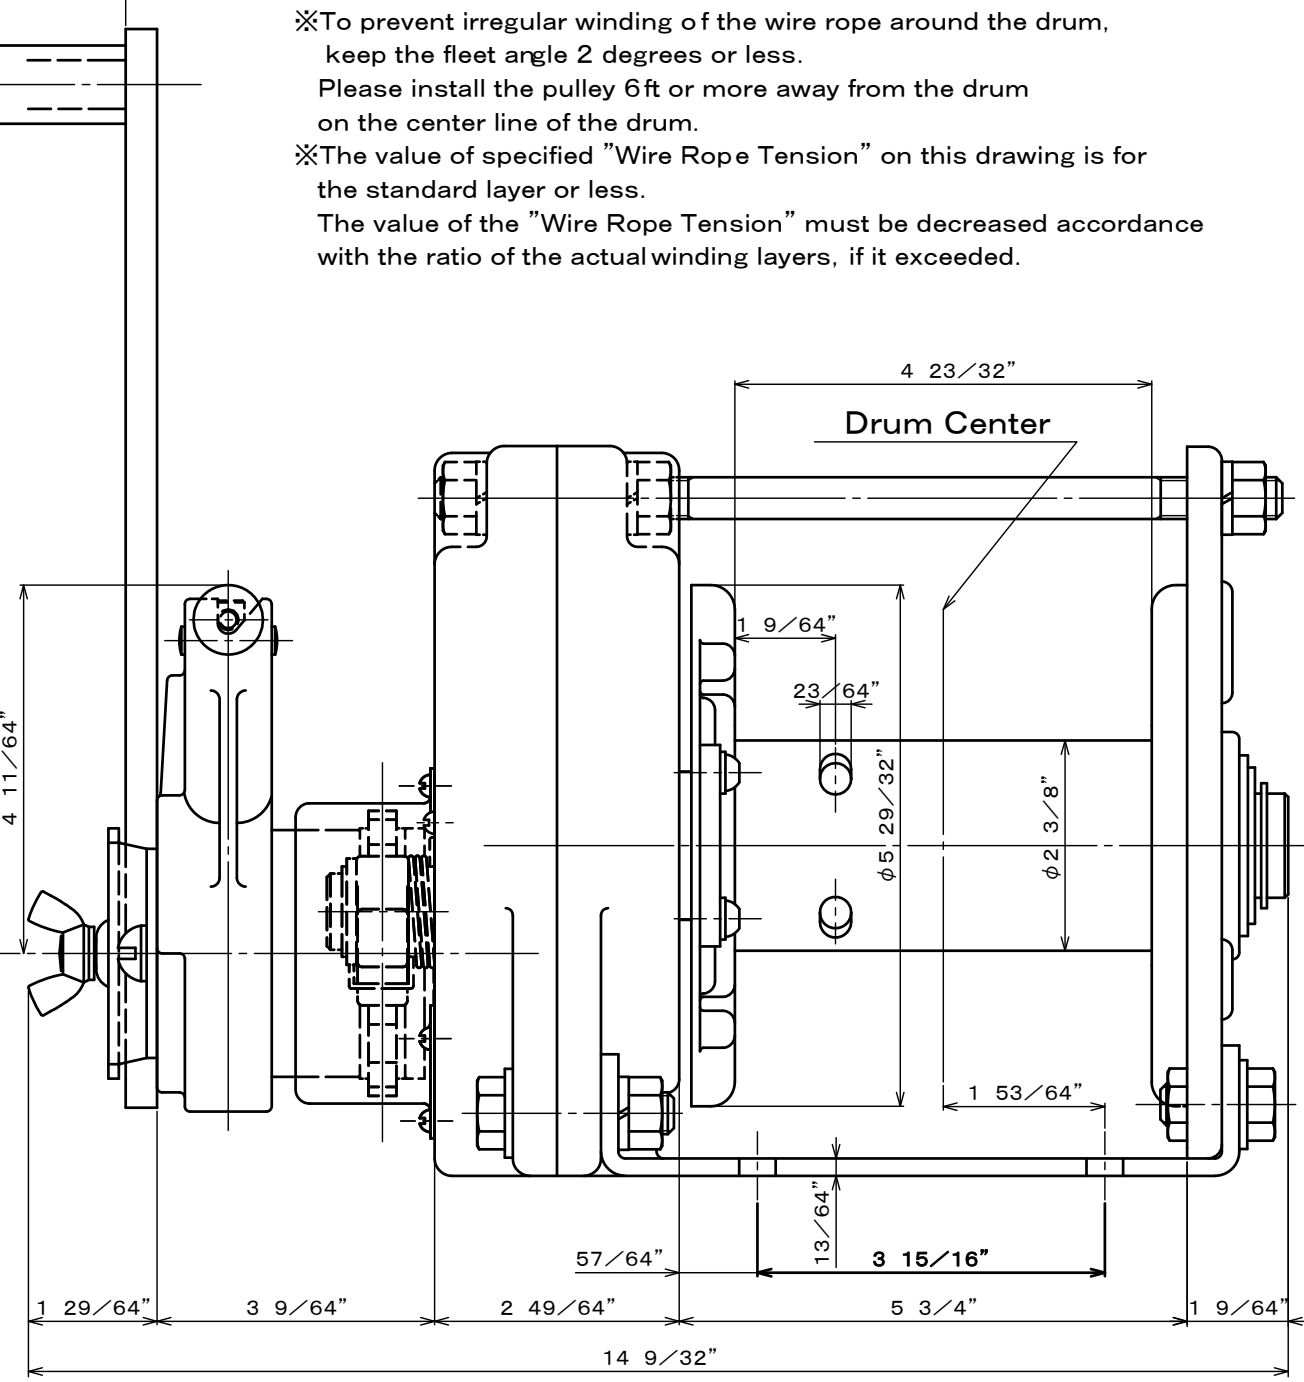


Specifications

(The wire rope composition is a manufacturer recommendation.)

Load Rating Wire Rope Tension	660 lbs (= 300 kgf) 5th Layer (Standard Layer)	Handle Force	Handle Length 9 27/32"	Number of Wire Rope Winding Layer	
Drum Capacity	Wire Rope 6-Layer Windings φ 1/4" (6 × 36) × 104 ft		Wire Rope Tension 660 lbs	1st Layer 17.0lbs (= 7.7kgf)	3rd Layer 23.1lbs (= 10.5kgf)
Gear Ratio	1/6.25	Standard Accesories		One Handle	
Effective Handle Length	9 27/32" (Maximum)	Painting		Melamine Resin Coating At Two Layers Painting Color Drum : Black (Munsell N1 Semi Gloss) Others : Munsell 7.5YR6/11	
Weight	33.1 lbs (Winch + Handle)				

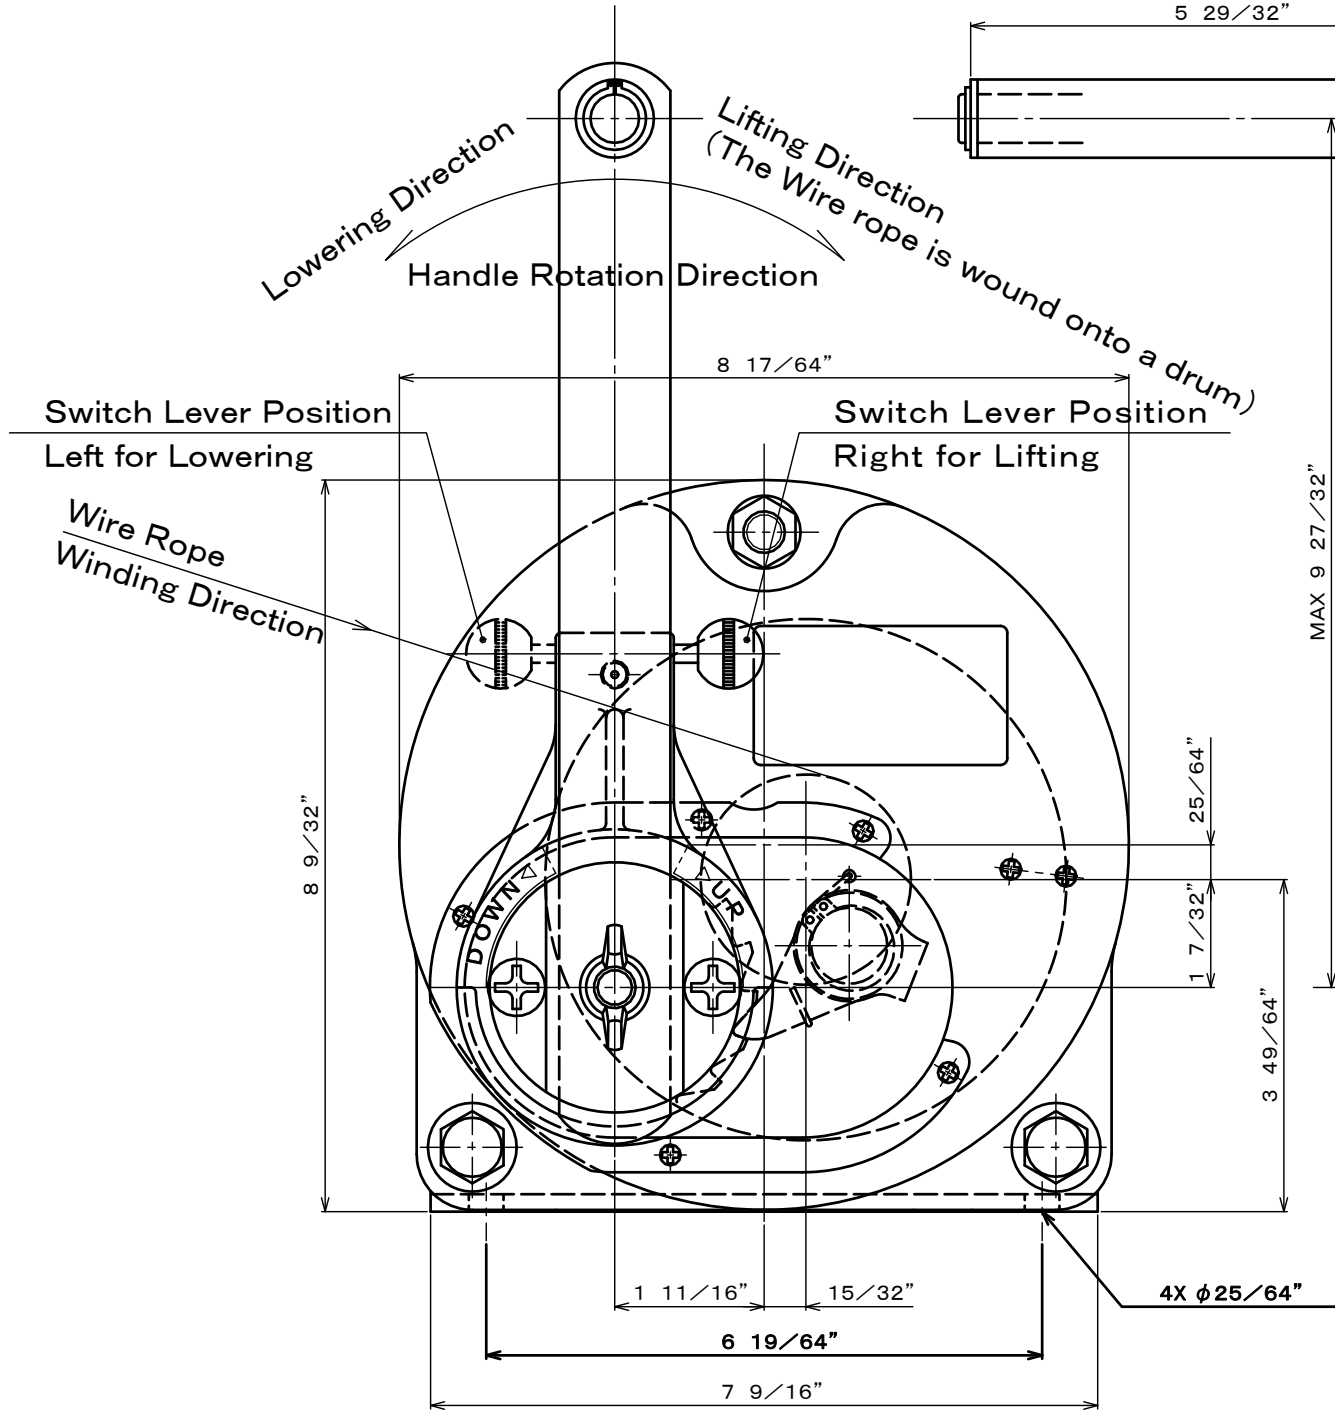

※To prevent irregular winding of the wire rope around the drum, keep the fleet angle 2 degrees or less. Please install the pulley 6ft or more away from the drum on the center line of the drum.

※The value of specified "Wire Rope Tension" on this drawing is for the standard layer or less. The value of the "Wire Rope Tension" must be decreased accordance with the ratio of the actual winding layers, if it exceeded.

4 ×		図面番号/DRAWING No.	MR3SI-180402-01U	改訂番号/REVISION No.	00	お客様/CUSTOMER		符号/MARK	項目/PARTICULARS	材料/MATERIAL	数量/QTY	単体重量(kg)/TOTAL WEIGHT	備考/REMARKS
3 ×		承認/APPROVED	設計部	検閲/CHECKED	設計部	作成/DRAWN	設計部	投影法/PROJECTION METHOD	第三角法 THIRD ANGLE PROJECTION	MAXPULL MACHINERY & ENGINEERING CO., LTD.			
2 ×		承認/APPROVED	米澤	検閲/CHECKED	松嶺	作成/DRAWN	武松	尺度/SCALE	台数/QTY	マックスプル工業株式会社			
1 ×		改訂/REVISION											

MAXPULL WINCH
STOPPER ARMLESS
RATCHET TYPE
MODEL MR-3-SI

