


MRCOOL

Olympus Hyper Heat Series Ductless Mini-Split Heat Pump A/C

Enhanced Performance



Superior heating
Saves you money
Extreme efficiency
Powerful performance
7 Year Compressor &
5 Year Parts Warranty

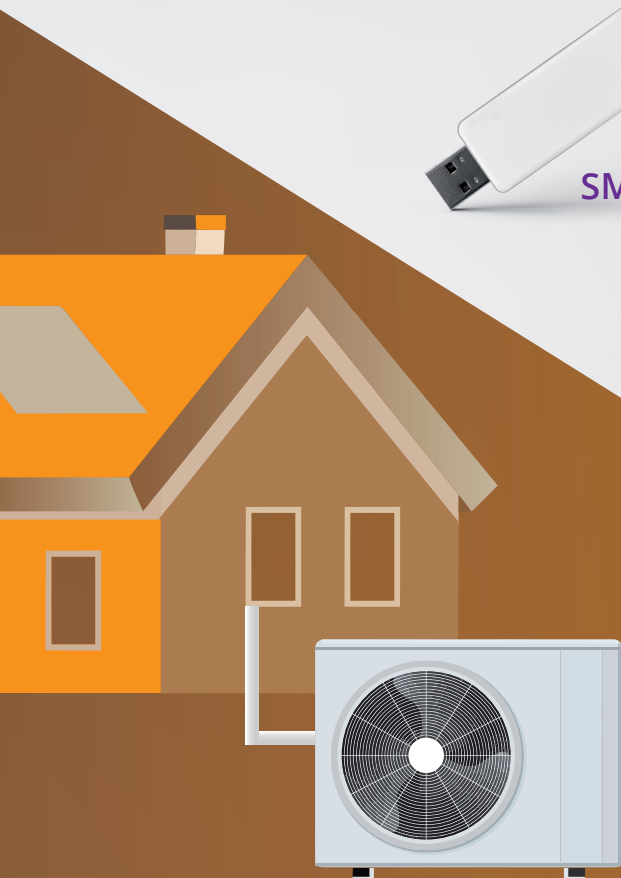

Best Features



Leakage Detection

Follow me®

Gold Fin® Condenser



Smartphone App

Enhanced Heating

Quiet Running

DC Inverter

Specification

Model No.	Indoor Unit	O-09-HP-WMAH-230A	O-12-HP-WMAH-230A	O-18-HP-WMAH-230A	O-24-HP-WMAH-230A
	Outdoor Unit	O-HH-09-HP-C-230	O-HH-12-HP-C-230	O-HH-18-HP-C-230	O-HH-24-HP-C-230

Capacity & Performance

Cooling Capacity	Btu/h	9000	12000	17000	24000
SEER	Btu/w	25.0	22.5	20.0	20.5
Heating Capacity	Btu/h	10900	11800	18000	24000
HSPF		11.2	12	10.3	11.5
Indoor noise level (Hi/Mi/Lo)	dB(A)	42/33/24.5	43/36/24	45.5/36/26.5	47.5 /44/36.5

Electrical Parts

Power supply	Ph-V-Hz	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph	208-230V~ 60Hz, 1Ph
Minimum Circuit (Disconnect)	A	9.0	9.0	18.0	20.0
Maximum Fuse (Breaker)	A	15.0	15.0	25.0	30.0

Dimensions & Weight

Net Dimension	Indoor	inch	32.87x7.80x11.02	32.87x7.80x11.02	38.98x8.58x12.40	46.69x10.16x13.39
	(WxDxH)	Outdoor	inch	31.50x13.11x21.81	31.50x13.11x21.81	33.27x14.29x27.64
Packing Dimension	Indoor	inch	35.83x10.63x13.98	35.83x10.63x13.98	41.93x11.81x15.75	49.80x16.53x13.39
	(WxDxH)	Outdoor	inch	36.22x15.35x24.21	36.22x15.35x24.21	37.99x15.55x29.72
Net weight	Indoor	lbs	19.84	19.84	26.89	40.12
	Outdoor	lbs	88.2	88.2	107.4	135.58
Gross Weight	Indoor	lbs	25.35	26.68	34.83	50.26
	Outdoor	lbs	93.7	93.7	115.1	148.81

Refrigerant & Piping

† Refrigerant R410A	oz	R410A/52.9	R410A/52.9	R410A/68.8	R410A/91.7
Piping Size Liquidside/Gasside	inch	1/4"-3/8"	1/4"-1/2"	1/4"-1/2"	3/8"-5/8"

National Average Annual Operating Costs

Cooling Cost*	\$	45	67	107	148
Heating Cost*	\$	196	198	353	421

* Data provided by AHRI



† Starting charge does not guarantee line charge. Running pressure must be checked by a technician.

WWW.MRCOOL.COM