


Overview

The Rogue Reach Dual-Band (DB) features a 1" - 14 female threaded base that will fit most standard antenna mounts and made to be ratchet mountable. The Rogue Reach DB is made of anodized aluminum and entirely enclosed for weather protection and mounting application. Power and connection are provided by a single 12V DC PoE cable for easy installation. While there is no software to be installed, the system comes with a user-friendly browser-based interface.

Our proprietary Graphic User Interface provides easy access to all functions and makes connecting a breeze.



Manage and sort through favorited Hotspots based on order of priority or signal strength.

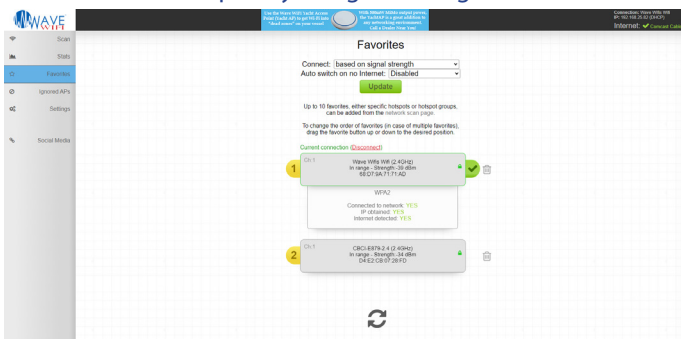

Features

- Dual-Band WiFi 2.4 and 5GHz (5.1-5.8GHz)
- Omni-Directional Antenna
- Single detachable cable 12V DC PoE
- Easy install with standard 1"-14 threaded base
- 600Mhz processor
- 802.11 b/g/n 2.4GHz | 802.11 a/n 5GHz
- 10/100 Mbit/s Ethernet Port

Availability of public wireless LAN access points may be limited. The transmission speed over the wireless LAN and the distance over which wireless LAN can reach may vary depending on surrounding electromagnetic environment, obstacles, access point design and configuration as well as client design and software/hardware configurations. The actual transmission speed will be lower than the theoretical maximum speed. Wireless connectivity and some features (i.e. VoIP) may require you to purchase additional software, external hardware or services.

*Actual distance may be affected by the strength and quality of the Hotspot signal, as well as having a clear line of sight to the boat. As we strive for constant product improvement, prices and specifications are subject to change without notice.

ROGUE REACH DB



Wave WiFi products offer outstanding performance through the proprietary firmware technology embedded in each unit. The Browser-based firmware permits the user to scan for hotspots and provides a detailed diagnostic of the quality of each hotspot. The Graphical User Interface allows the user to see the signal strength and quality in real time of any connected hotspot.



Fiberglass Shaft

Clear Anodized Aluminum

Rogue Reach DB
Freq: 2.4GHz / 5GHz
Size: 22in. H x 1.5in. W

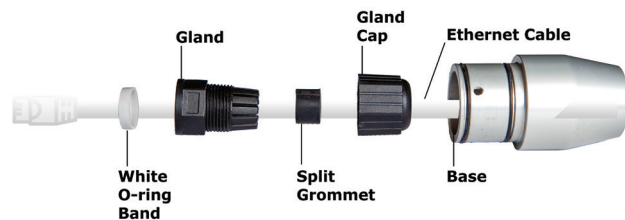


Diagram 1.

Ratchet Mount
(Not included)



Availability of public wireless LAN access points may be limited. The transmission speed over the wireless LAN and the distance over which wireless LAN can reach may vary depending on surrounding electromagnetic environment, obstacles, access point design and configuration as well as client design and software/hardware configurations. The actual transmission speed will be lower than the theoretical maximum speed. Wireless connectivity and some features (i.e. VoIP) may require you to purchase additional software, external hardware or services. *Actual distance may be affected by the strength and quality of the Hotspot signal, as well as having a clear line of sight to the boat. As we strive for constant product improvement, prices and specifications are subject to change without notice.