



### FEATURES:


- ✓ Universal AC input / Full range
- ✓ High efficiency (maximum 89 %)
- ✓ Short circuit protection
- ✓ Over voltage protection
- ✓ Over power protection
- ✓ Highly reliable Japanese 105 °C aluminum electrolytic capacitors
- ✓ Ball bearing fan
- ✓ LED indicator for power on
- ✓ Flexible voltage adjustment by VR

### SPECIFICATIONS:

Model		SSE-4501			
		PF-5	PF-12	PF-24	PF-48
Specification					
DC Output Voltage	V	5	12	24	48
DC Maximum Load	A	80	37.5	18.8	9.38
Total DC Output	W	400	450	451.2	450
Efficiency at 115 / 230V	%	80 / 82	84 / 86	85 / 87	84 / 85
AC Input Voltage	V	AC 90 ~ 264 (47 ~ 63 Hz)			
AC Input Current at 115 / 230V	A	6 / 3			
Voltage Adjusting Rating	V	4.5 ~ 5.5	10.8 ~ 13.2	21.6 ~ 26.4	43.2 ~ 52.8
Working Temperature	°C	-30 °C to 70 °C			
Cooler Type		Ball bearing fan (60 mm x 60 mm x 25 mm)			
Dimensions (L x W x H)	mm	215 x 115 x 50			

### APPLICATIONS:

- Display devices
- Automatic door operators

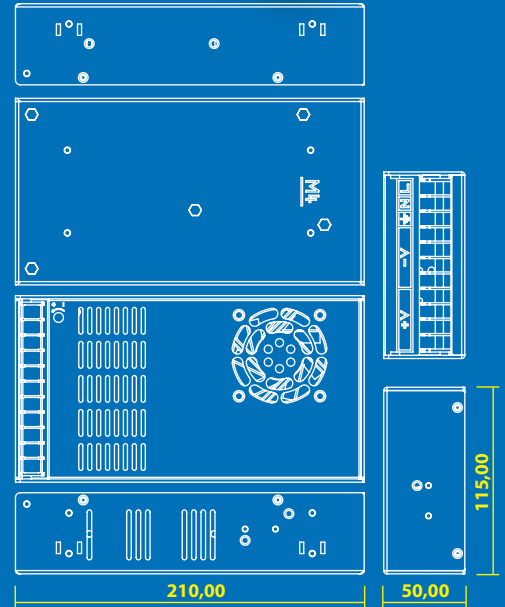

### Dimensions:

210 mm (L) x 115 mm (W) x 50 mm (H)

### Safety:

CB	cUL	CCC
✓	✓	—
cTUVus	TUV	BSMI
—	✓	—

### EMI/EMC:

CE	FCC	RCM
✓	✓	—



SPECIFICATIONS MAY CHANGE WITHOUT PRIOR NOTICE.