

### Specifications

**Alarm Power**  
120VAC, 1.5A max

**Auxiliary "Dry" Contacts**  
129 VAC, 1A

**Enclosure**  
Type 4X, Outdoor




### Safety Guidelines

Before proceeding with the installation or operation of the control panel read all instructions thoroughly, as well as comply with all federal, state and local codes, regulations and practices. The control panel must be installed by qualified personnel familiar with all applicable local electrical and mechanical codes. Refer to the National Electrical Code (NFPA 70). Failure to properly install and test this product can result in personal injury or equipment malfunction. All conduit connected to the panel must be sealed with conduit sealant to prevent moisture or gases from entering the panel. NEMA 1 enclosures are for indoor use only while NEMA 4X panel enclosures may be used indoor or outdoor. Refer to panel model name plate on inside of door for enclosure rating. Note: If options are ordered that affect the number of floats, refer to the panel schematic for complete information.


1. DO NOT USE WITH FLAMMABLE OR EXPLOSIVE FLUIDS SUCH AS GASOLINE, FUEL OIL, KEROSENE, ETC. DO NOT USE IN EXPLOSIVE ATMOSPHERES. CONTROL PANEL SHOULD ONLY BE USED IN WATER AND WASTEWATER APPLICATIONS THAT ARE NOT RATED AS A HAZARDOUS LOCATION.
2. DO NOT WORK ON THE CONTROL PANEL WITH LIVE VOLTAGE APPLIED TO THE CONTROL PANEL WITH WET HANDS OR WHEN STANDING ON A WET SURFACE.
3. DISCONNECT ALL ELECTRICAL SERVICE BEFORE WORKING ON OR HANDLING THE CONTROL PANEL
4. INCOMING VOLTAGE MUST MATCH THE CONTROL PANEL VOLTAGE. REFER TO THE PANEL SCHEMATIC FOR COMPLETE INFORMATION.

1




Factory Wiring


2

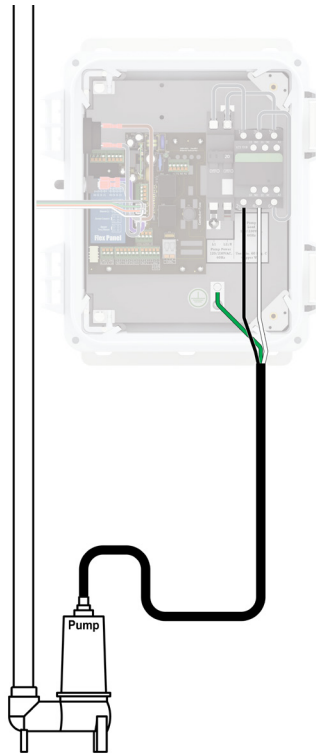


3

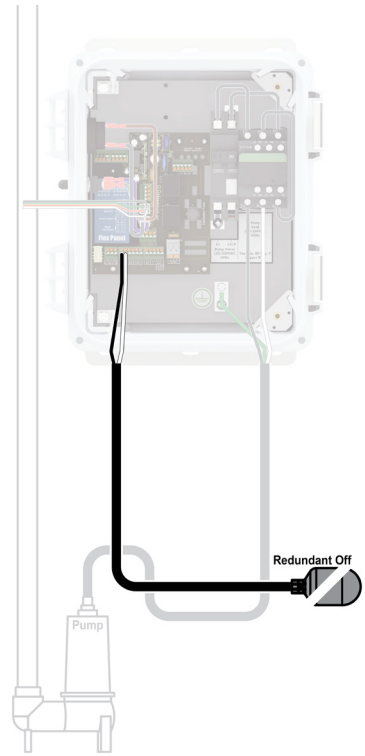


4

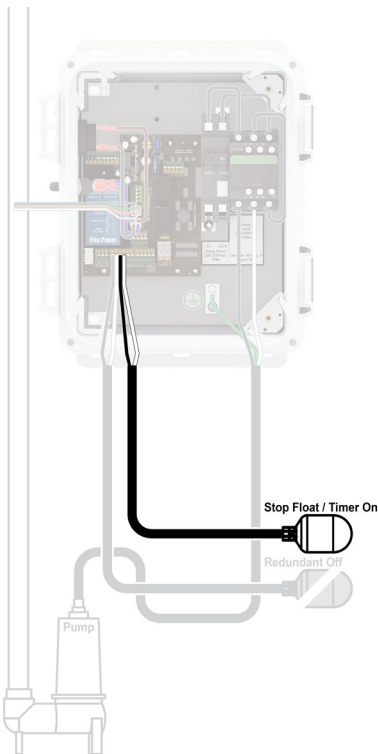


5

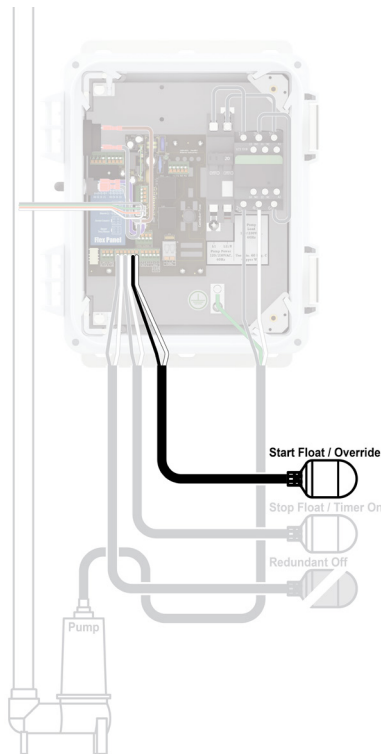

6

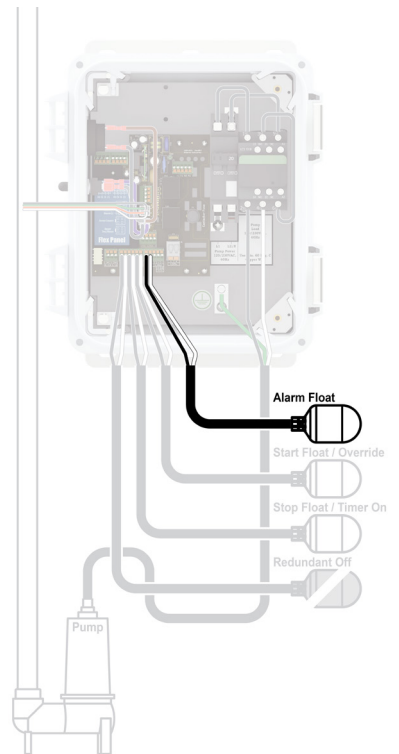

7

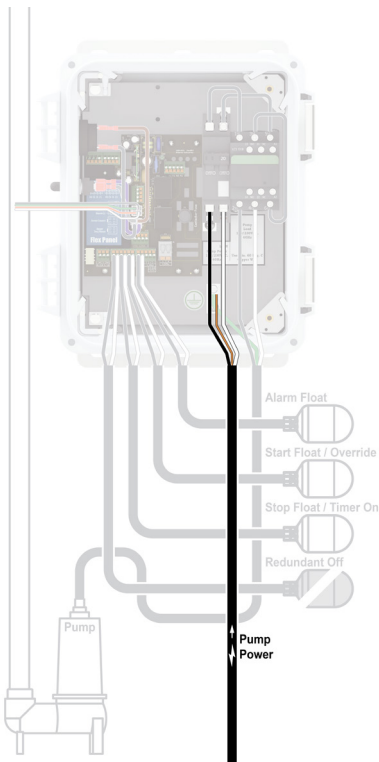

8

