

WaterPro™ Series Accessories



Leading Edge Control Products

Expanded Applications for Water Protection Monitoring

ALARM or CONTROL PANELS (INDOOR and OUTDOOR)

TECHNICAL DATA SHEET

DESCRIPTION OF OPERATION

A variety of accessories are available for existing applications using Alderon™ WaterPro™ indoor alarm panel or indoor/outdoor control panel monitoring systems. Multiple sensors (signaling device) can be connected for expanded water protection monitoring.

WaterPro™ WaterSpotter™ Flood Sensor

PART NUMBER	8075	SPECIFICATIONS	MECHANICAL DRAWING
-------------	------	----------------	--------------------



Electrical
9-12VDC

Operating Current
3mA

Switching Current
500mA maximum



Probes
Stainless Steel

Detection Level
1/16-inch of water

Cable Type
PVC, 22AWG, 2-conductor,
15-feet
(custom lengths available)

Three-Year Limited Warranty

CAUTION: Connect ONLY to Alderon™ alarm panel monitoring systems.

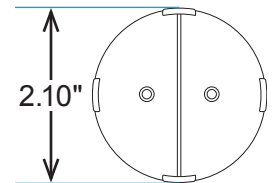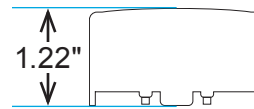

WaterSpotter™ Probe Sump Sensor

PART NUMBER	7009	SPECIFICATIONS	MECHANICAL DRAWING
-------------	------	----------------	--------------------



Electrical
9-12VDC

Operating Current
3mA

Switching Current
500mA maximum



Probes
Stainless Steel

Detection Level
Preset level in sump basin

Cable Type
PVC, 22AWG, 2-conductor,
15-feet
(custom lengths available)

Three-Year Limited Warranty

CAUTION: Connect ONLY to Alderon™ alarm panel monitoring systems.

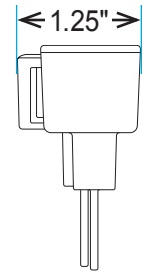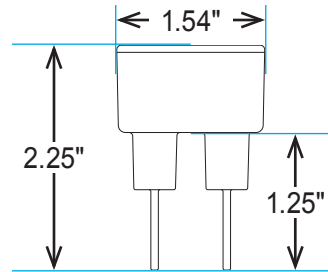

Remote Strobe Beacon

PART NUMBER	7933	SPECIFICATIONS	MECHANICAL DRAWING
-------------	------	----------------	--------------------



Electrical
6-12VDC

Operating Current
150mA maximum



LEDs
12 LEDs
flash rate 120 times/min

Operating Life
Over 50,000 hours

Enclosure
IP64, Indoor and Outdoor
(ingress protection)

Three-Year Limited Warranty

CAUTION: Connect ONLY to Alderon™ alarm panel monitoring systems.

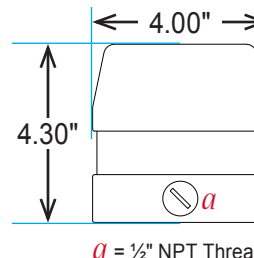

a = 1/2" NPT Thread

Altra™ Narrow Angle Control Switch | 20' Cable

PART NUMBER	2001104	SPECIFICATIONS	MECHANICAL DRAWING
-------------	---------	----------------	--------------------



Electrical
5 Amp, 120/240VAC

Switch Arrangement
Single Pole, Single Throw

Operating Temperature
0 - 140° F

Switching Differential
20° total (*narrow angle*)


Cable Type
SJOOW (UL/CSA), 18 AWG,
2-conductor, flexible, and
water/oil resistant

Certifications
CSA (US and Canada)

**Three-Year Limited
Warranty**


Float Housing
Polypropylene

CAUTION: Connect ONLY
to Alderon™ alarm panel
monitoring systems.

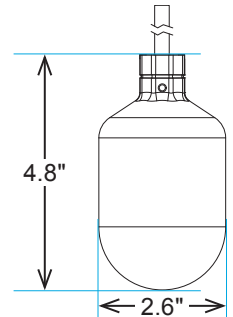

Auto Dialer 2-Zone | Remote Notification - Four Programmable Numbers with 30 Second Message

PART NUMBER	7019	SPECIFICATIONS	MECHANICAL DRAWING
-------------	------	----------------	--------------------

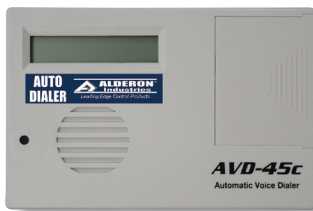

Electrical
120VAC
(wall-mounted power supply)


Alarm Contact Switch
Two independent contact
switch monitoring

Battery Backup
12-hour wall-mounted
rechargeable batter

Phone Connection
Connects to standard land line,
calls up to four numbers

Operating Temperature
0 - 130° F

**Three-Year Limited
Warranty**

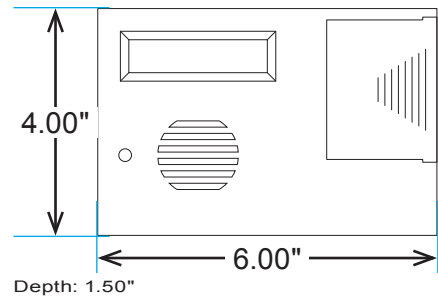

Low Temperature Switch

PART NUMBER	7018	SPECIFICATIONS	MECHANICAL DRAWING
-------------	------	----------------	--------------------



Detection Temperature
40° F (fixed)


**Three-Year Limited
Warranty**

Contacts
Normally Closed
12VDC, 100mA maximum

Mounting
Wall or flat surface

Certifications
UL Listed

NOTE: Required to be used with a
7019 Auto Dialer.

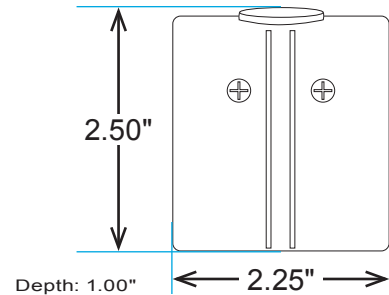

ORDERING INFORMATION

For a complete list of standard products with pricing, refer to the current year price sheet or visit alderonind.com for more information.

PART NUMBER	DESCRIPTION
8075	WaterPro™ WaterSpotter™ Flood Sensor, 15' Cable
7009	WaterSpotter™ Probe Sump Sensor, 15' Cable, Stainless Steel Pipe Clamp
7933	Strobe Beacon, 6-12VDC
2001104	20' Altra™ Narrow Angle Control Switch, Normally Open (high level), Stainless Steel Pipe Clamp, Bagged
7019	Auto Dialer; 2-Zone, two different messages, one for water and one for furnace fail
7018	Low Temperature Switch (need to order 7019 also)