

Griffco Valve Inc.

188 Creekside Drive Amherst, NY 14228 PH: 716 835-0891 FAX: 716 835-0893

UNIBODY RELIEF & BACK PRESSURE VALVES



Griffco's new unibody valve is the latest innovation to ensure leak-free connections and operation. This new design allows flexibility of changing connection types, ease of maintenance, and eliminates additional system components (extra unions); saving time and money. As with all of the Griffco designs, the chemical feed system is safeguarded by either applying a continuous back pressure to the chemical feed pump, while also acting as an anti-siphon valve or allowing for system pressure relief (2-port only) in case of an upset condition. This new construction ensures increased leak-free reliability in the rigorous service of municipal and industrial applications. Wetted materials include: **PVC and CPVC.** Available from 1/2", 3/4", and 1" union socket connections.


Features:

- Completely machined body
- No seals or glued connections
- Union style connections
- Available in PVC and CPVC
- Adjustable Pressure Settings
- Anti-Siphon Function
- Composite PTFE/EPDM Diaphragm
- NSF certified (PVC only)
- 2 Year Warranty
- Made in the USA!

Operation:

Griffco diaphragm <u>back pressure valves</u> apply positive discharge pressure to a metering pump system to prevent siphoning and eliminate varying dosage rates caused by fluctuating downstream pressure. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded, the diaphragm is forced up and chemical flows through the valve to the injection point.


Griffco diaphragm <u>pressure relief valves</u> operate when the pressure in the chemical system exceeds the preset pressure of the valve. The diaphragm is held against the valve seat by an internal spring. When the preset pressure is exceeded the diaphragm is forced up and the chemical flows out the relief port, back to the chemical tank or to the suction side of the pump.

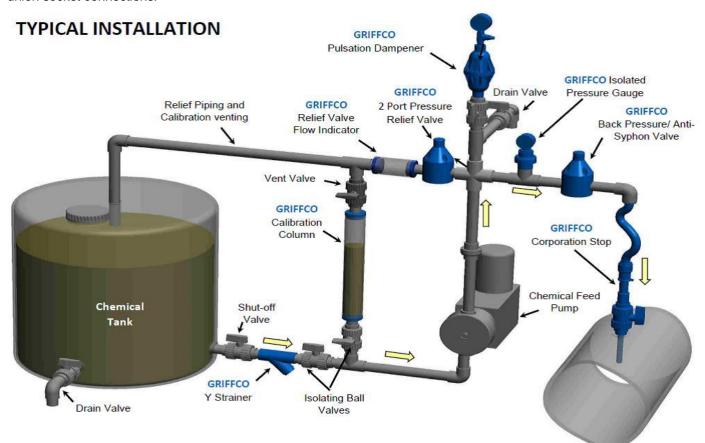


Technical Data:

Technical De			_		
Types: BPU - Back Pressure Valve			Sizes: 1/2", 3/4", & 1"		
PRU - Pressure Relief Valve (2 Port)					
Connections:			Union Socket		
Pressure Adjustment			Standard: 10 - 150 psi		
			Optional: 0 - 50 psi, 10 - 250 psi		
Flow Rates @ 150 psi			Shipping Weight: lbs		
Size	Pulsating	Continuous	Plastic	Metal / Plastic Top	Metal / Metal Top
1/2"	260 USgph	15 USgpm	1.0 lb	N/A	N/A
3/4"	300 USgph	19 USgpm	3.0 lb	N/A	N/A
1"	500 USgph	26 USgpm	3.0 lb	N/A	N/A
Max Temperature:			PVC: 140°F; CPVC: 195°F		
Max Operating Pressure @ 70°F:			Plastic/Noryl: 250 psi		
Materials of C	construction:				
Diaphragm			Standard: PTFE / EPDM		
			Optional: Viton, Hypalon, Nitrile, PTFE / Viton		
O-rings			Standard: Viton, Optional EPDM		
Valve Top			Standard: Noryl		
Valve Body			PVC, CPVC		

Performance Curves:

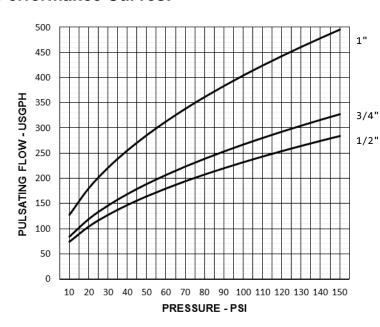

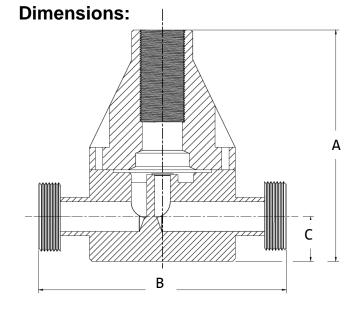

Size	A (in)	B (in)	C (in)
1/2"	4.250	4.850	1.080
3/4"	5.560	5.210	1.250
1"	5.560	5.210	1.250

Product Codes For Ordering:

BPU or PRU □□□ □ □ □ □ 1 2 3 4

BPU - Back Pressure valve or PRU - Pressure Relief valve (2 port)

1 = Size 2 = Material 3 = Spring Opt 4 = Options

050 - 1/2" P - PVC Blar 075 - 3/4" CP - CPVC 1 -100 - 1" 2 - 1

Blank – 10-150 psi 1 – 0-50 psi 2 – 10-250 psi

Blank – PTFE/EPDM Diaphragm. with Viton O-Rings V - Viton Diaphragm

V - Viton Diaphragm E – EPDM O-Rings

D – Metric Connections

EE – EPDM Diaphragm & O-Rings