


# AC1146



## AS-Interface diagnosis module

AS-i Tuner IP67

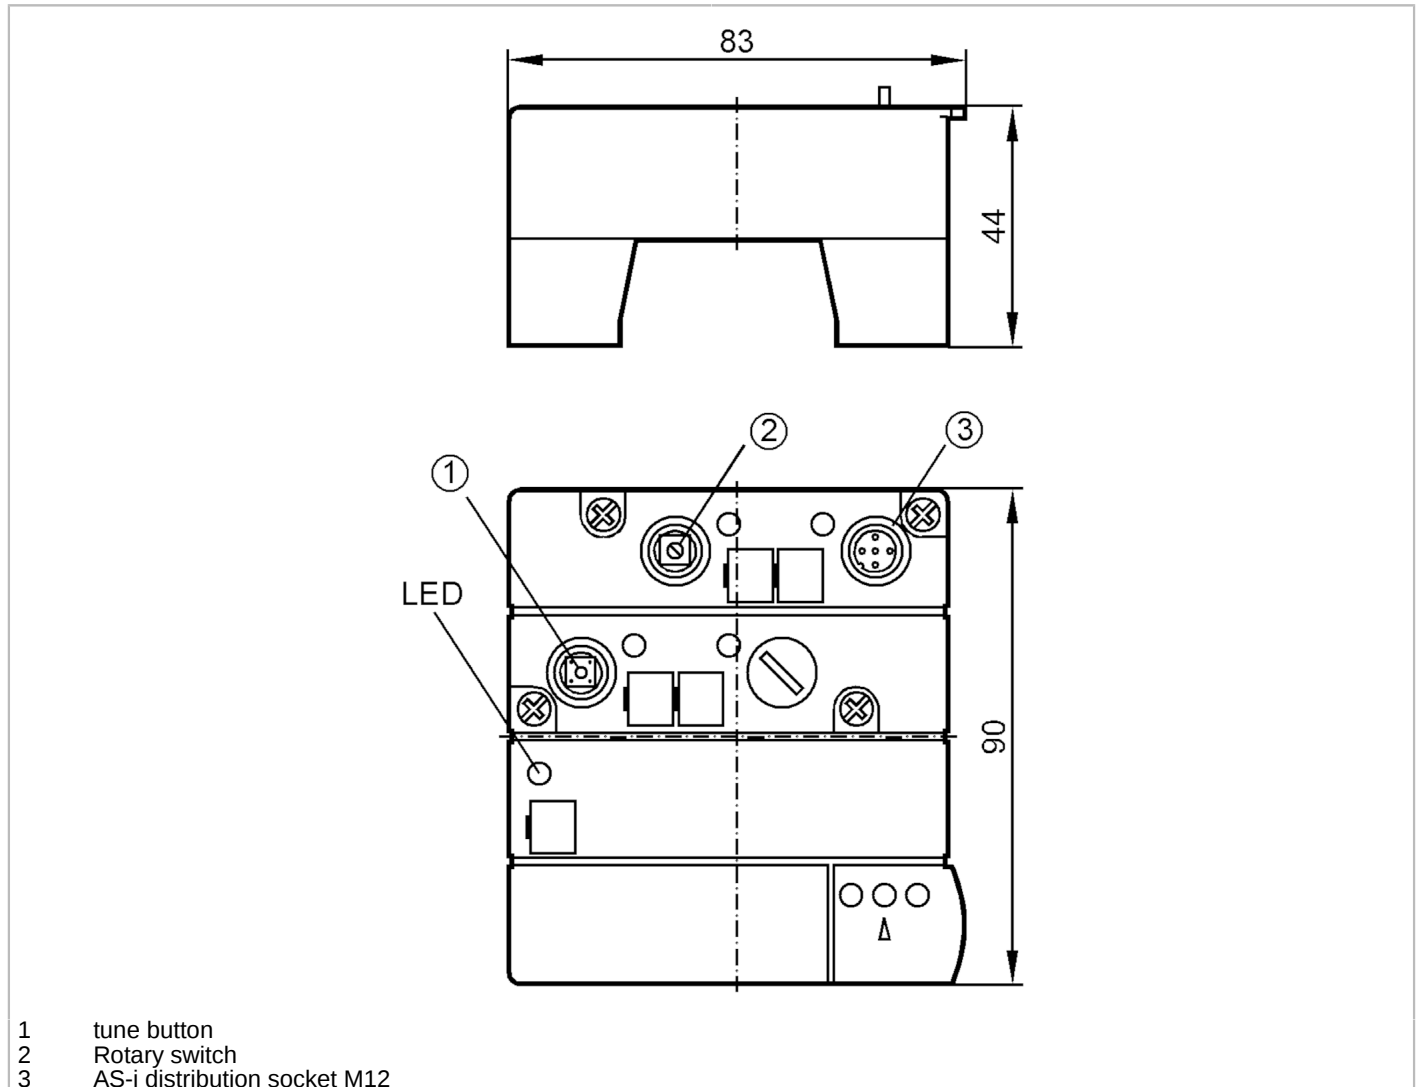

- 1 tune button
- 2 Rotary switch
- 3 AS-i distribution socket M12




Application	
Application	diagnostic tool for AS-i
Electrical data	
Nominal voltage DC [V]	26.5...31.6
Max. current consumption from AS-i [mA]	60
Reverse polarity protection	yes
Undervoltage monitor	yes
Operating conditions	
Ambient temperature [°C]	0...55
Protection	IP 67
Tests / approvals	
MTTF [years]	140
Mechanical data	
Weight [g]	199.2

# AC1146



## AS-Interface diagnosis module

AS-i Tuner IP67

Material	PBT	
<b>Displays / operating elements</b>		
Display	Power	LED, green
	warning	LED, yellow
	errors	LED, red
<b>Accessories</b>		
Accessories (optional)	Module lower part:, AC5000	
<b>Remarks</b>		
Remarks	no addressing required	
	Current rating of the AS-i distribution socket max. 1 A	
Pack quantity	1 pcs.	
<b>Electrical connection</b>		
contact pins to module lower part, FK:		
Connector: M12; coding: A		
		
1	AS-i distribution socket M12	
2	AS-i +	
3	AS-i -	