


# AL2605



## IO-Link input/output module

IOL MOD PL 8XMP/DX E M12 IP67

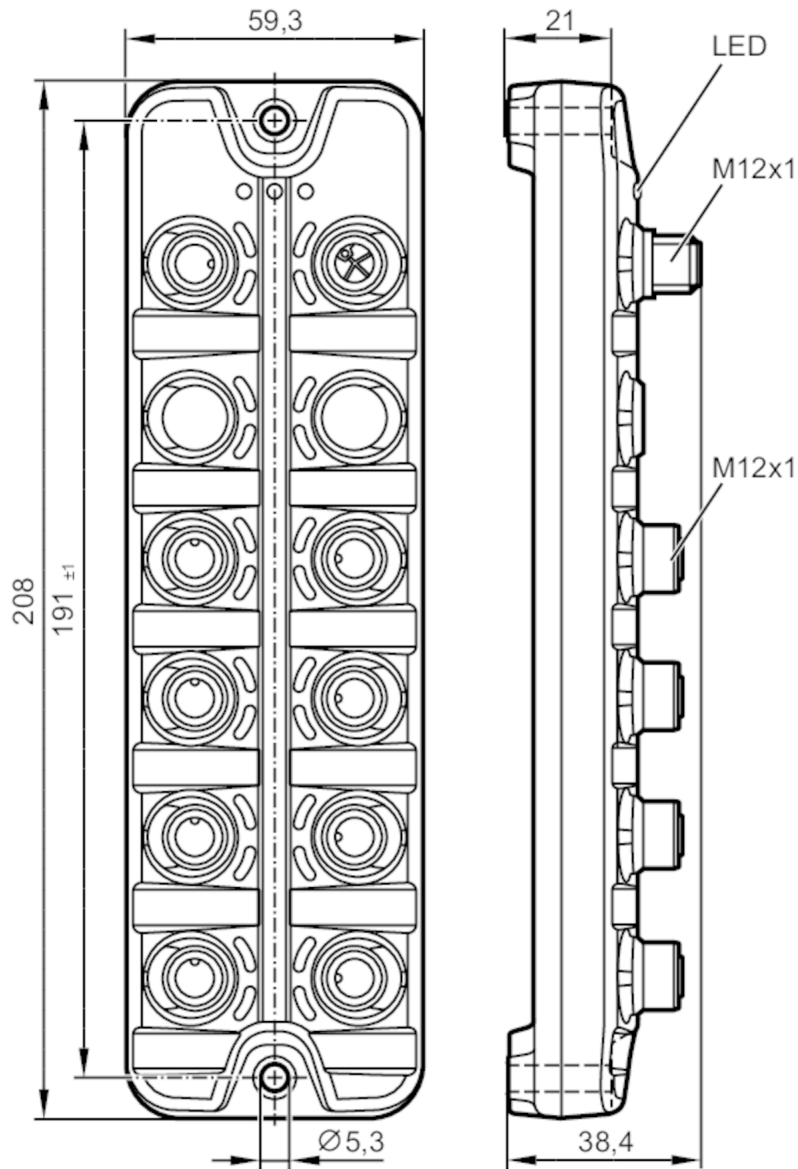

Depending on the version some LEDs are inactive



### Electrical data

Operating voltage	[V]	18...30 DC
Current consumption	[mA]	100; (US)
Protection class		III
Additional voltage supply	[V]	18...30 DC; (UA UAi)
Max. current consumption from additional supply	[mA]	16000; (UA; UAi: 800 mA)

### Inputs / outputs

Total number of inputs and outputs		16
------------------------------------	--	----

# AL2605



## IO-Link input/output module

IOL MOD PL 8XMP/DX E M12 IP67

Number of inputs and outputs	Number of digital inputs: 16; Number of analog inputs: 8; Number of digital outputs: 16	
<b>Inputs</b>		
Number of digital inputs	16; (configurable)	
Input circuit of digital inputs	PNP; (type 3 (IEC 61131-2))	
Sensor supply of the inputs	AUX (UA, UAi)	
Voltage supply [V]	18...30	
Input current High [mA]	2...15	
Input current low [mA]	0...1.5	
Switching level high [V]	11...28	
Switching level low [V]	0...5	
Number of analog inputs	8; (configurable current/voltage input)	
Analog input (current) [mA]	4...20	
Analog input (voltage) [V]	0...10	
Resolution of analog input	16 Bit	
<b>Outputs</b>		
Number of digital outputs	16; (configurable)	
Max. current load per output [mA]	2000	
Max. current load outputs total [A]	16	
Short-circuit protection	yes	
Actuator supply outputs	AUX (UA)	
<b>Interfaces</b>		
Communication interface	IO-Link	
SDCI standard	IEC 61131-9	
Transmission type	COM3 (230,4 kBaud)	
IO-Link revision	1.1	
SIO mode	no	
Required master port class	A	
Min. process cycle time [ms]	4	
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>
	Acyclic parametrisation	1316
	Factory setting: parametrisation via Pdout	1315
Note	Parameterization can be changed from cyclical to acyclical. For further information please see the IODD PDF file at "Downloads"	
<b>Operating conditions</b>		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...70	
Max. relative air humidity [%]	90	
Max. height above sea level [m]	2000	
Protection	IP 65; IP 67	
Protection rating (NEMA 250)	6P	
Degree of soiling	2	
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA

# AL2605



## IO-Link input/output module

IOL MOD PL 8XMP/DX E M12 IP67

Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	IEC 61131-9	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64	
	DIN EN 60068-2-6	
MTTF	[years]	35

Mechanical data		
Weight	[g]	394
Dimensions	[mm]	26 x 59.3 x 208
Material	housing: PA orange; Socket: brass nickel-plated	
Sealing material	FKM	
Tightening torque	[Nm]	< 0.8

Displays / operating elements		
Display	Power	1 x LED, green
	fault	1 x LED, red
	Function	1 x LED, yellow

Accessories	
Accessories (optional)	protective cap for M12 sockets

Remarks	
Pack quantity	1 pcs.

### Electrical connection - AUX

Connector: 1 x M12; coding: L



X31	
1	+ 24 V DC (U <sub>Ai</sub> )
2	GND (U <sub>A</sub> /U <sub>Ai</sub> )
3	not used
4	+ 24 V DC (U <sub>A</sub> )
5	functional earth



## IO-Link input/output module

IOL MOD PL 8XMP/DX E M12 IP67

### Electrical connection - IO-Link

Connector: 1 x M12; coding: A




#### X1

1	+ 24 V DC (US)
2	not used
3	GND (US)
4	IO-Link

### Electrical connection - inputs / outputs

Connector: 8 x M12; coding: A; sealing: FKM



#### X1.0...X1.7

1	Sensor supply + 24 V DC (UA/UAi)
2	multifunctional input I2 Digital output O2
3	Sensor supply GND (UA/UAi)
4	digital input/output I/O1
5	not used