


# AL4133



## Ethernet module with EtherCAT interface

ETH Module PFL EC 16DI IP69K

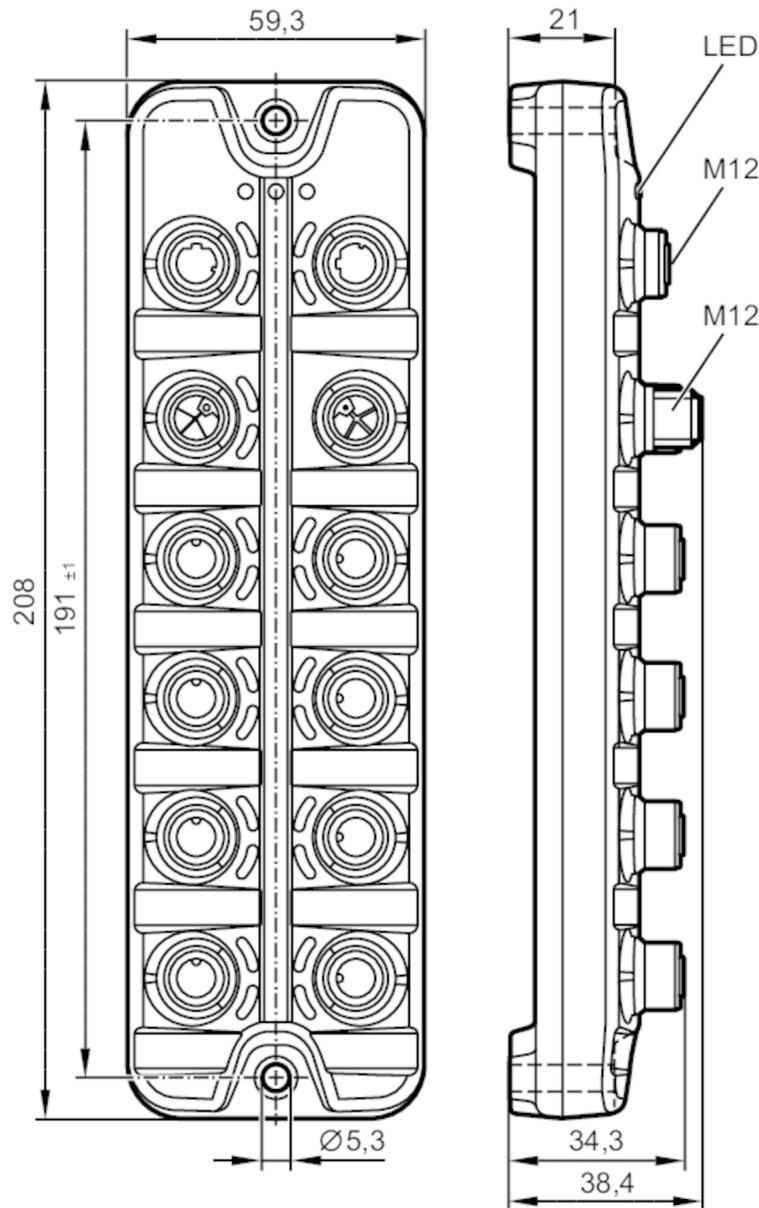

Depending on the version some LEDs are inactive



### Application

Application	hygienic systems; I/O modules for field applications
-------------	--

Daisy-chain function	voltage supply; fieldbus interface
----------------------	------------------------------------

### Electrical data

Operating voltage [V]	20...30 DC; (US ; to SELV/PELV)
-----------------------	---------------------------------

Current consumption [mA]	200...3900; (US)
--------------------------	------------------

Protection class	III
------------------	-----

Sensor supply US	
------------------	--

Max. current load total [A]	3.6
-----------------------------	-----

# AL4133



## Ethernet module with EtherCAT interface

ETH Module PFL EC 16DI IP69K

Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 16
Inputs		
Number of digital inputs		16; (type 2 according to IEC 61131-2)
Switching level high	[V]	11...30
Switching level low	[V]	0...5
Digital inputs protected against short circuits		yes
Software / programming		
Parameter setting options		Counter function
Functions and parameters	Function	CTU (Up Counter), CTD (Down Counter), CTUD (Up-Down Counter), CTDIR (Direction Counter)
	number	8 (1 counter for each port)
	count frequency	4500 Hz
	main counter	32 Bit (0...4.294.967.295)
	batch counter	16 Bit (0...65.535)
Interfaces		
Communication interface		Ethernet
Ethernet - EtherCAT		
Transmission standard		100Base-TX
Transmission rate		100 MBit/s
Protocol		EtherCAT
Factory settings		MAC address: see type label
Note on interfaces		AoE (ADS over EtherCAT) CoE (CANopen over EtherCAT)
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-25...85
Max. relative air humidity	[%]	90
Protection		IP 65; IP 66; IP 67; IP 69K; (operation with stainless steel protective caps: IP 69K)
Protection rating (NEMA 250)		6P
Degree of soiling		2
Chemical media	ISO 16750-5 NEMA 250 5.13.1	HLP, CC, DB, DC, DD, CA AA
Tests / approvals		
EMC	EN 61000-6-2 EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64 2009-04 DIN EN 60068-2-6 2008-10	
Mechanical data		
Weight	[g]	432.7
Material		housing: PA grey; Socket: stainless steel (1.4404 / 316L)
Sealing material		EPDM

# AL4133



## Ethernet module with EtherCAT interface

ETH Module PFL EC 16DI IP69K

### Accessories

Items supplied	Protective cap: 1 x M12, stainless steel, E12542
----------------	--

### Remarks

Remarks	Further information is available in the manual.
---------	---

Pack quantity	1 pcs.
---------------	--------

### Electrical connection - Ethernet

Connector: M12; coding: D; sealing: EPDM




### IN / OUT XF1, XF2

1	TX +
2	RX +
3	TX -
4	RX -
5	not used

### Electrical connection - Process connection

Connector: M12; coding: A; sealing: EPDM



### Digital Input X1...X8

1	Sensor supply (US) L +
2	Digital input 2
3	Sensor supply (US) L -
4	Digital input 1
5	functional earth

### Electrical connection - voltage supply IN

Connector: M12; coding: L



# AL4133



## Ethernet module with EtherCAT interface

ETH Module PFL EC 16DI IP69K

### XD1

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black
5	FE grey

### Electrical connection - voltage supply OUT

Connector: M12; coding: L; sealing: EPDM



### XD2

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black
5	FE grey