


E20165



Fiber optic through beam sensor

FE-30-P-A-R6

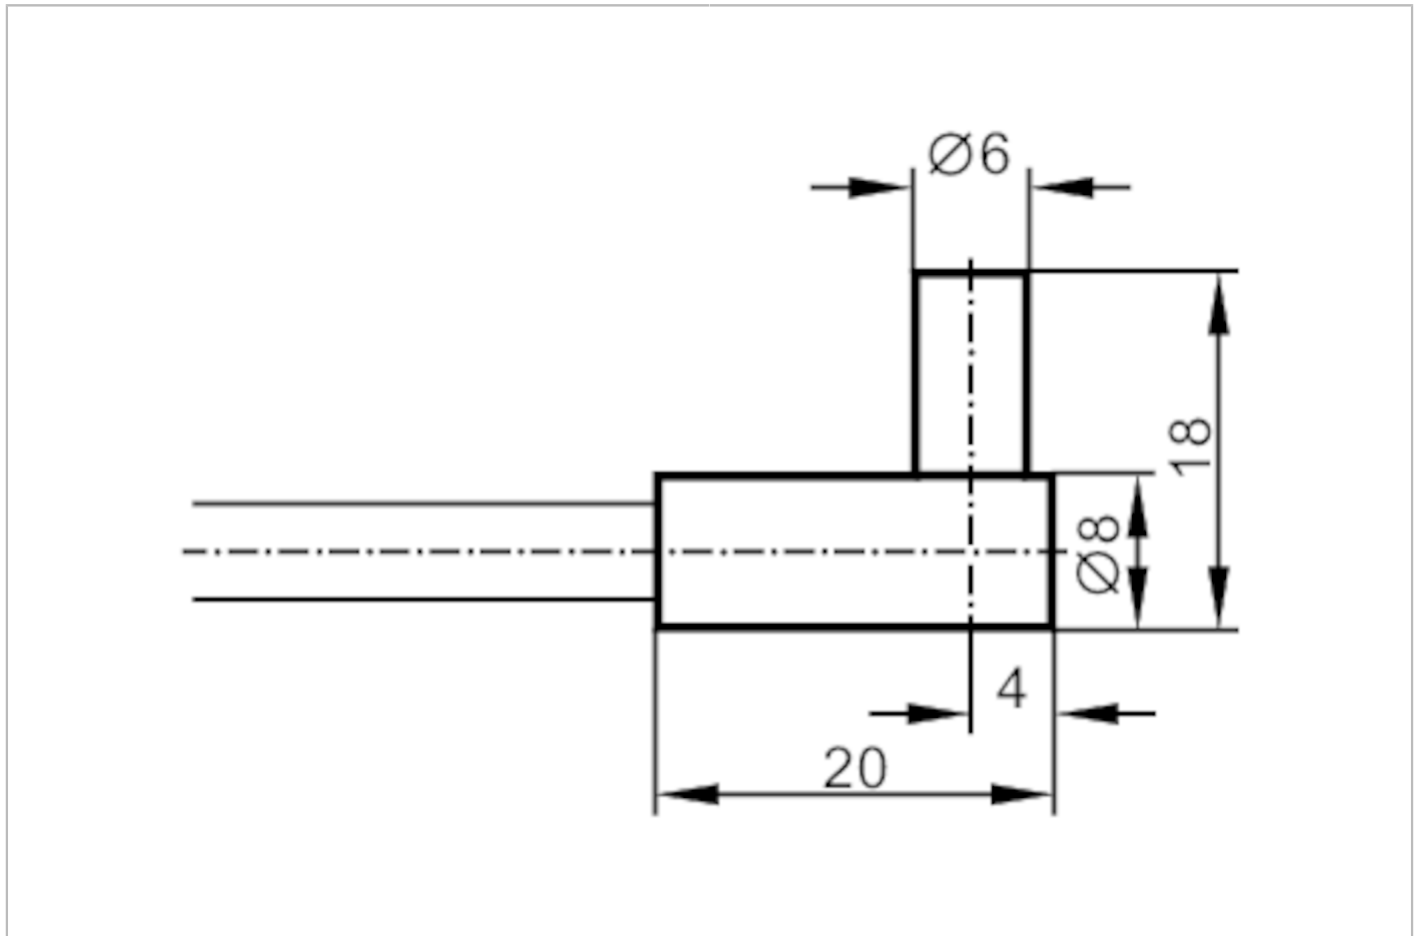

Application	
Function principle	Through-beam sensor
Application	For use in industrial environments
Monitoring range	
Range with fiber optic amplifier type	OIF
OIF	
Range of fiber optics [mm]	300
Operating conditions	
Ambient temperature [°C]	-20...80
Mechanical data	
Weight [g]	107.5
Version of sensing head	angled
Sensing head diameter [mm]	6
Total length [mm]	600
Min. bending radius [mm]	30
Fiber arrangement	●
Material	Adapter: PA
Fiber material	glass
Fiber head material	aluminum

E20165



Fiber optic through beam sensor

FE-30-P-A-R6

Fiber sheath material	PVC
Accessories	
Items supplied	Mounting clamp:, E10221
Remarks	
Pack quantity	1 pcs.