


Fiber optic diffuse reflection sensor

FT-00-MPV-M6/1,2M

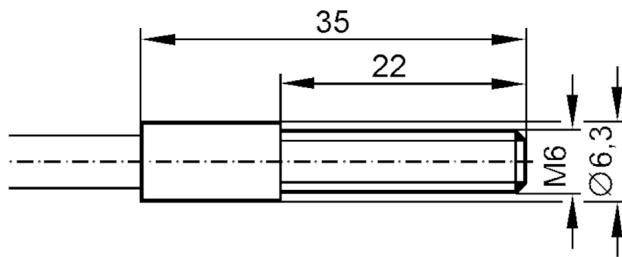

Application

Function principle	Diffuse reflection sensor
Application	Robust design for use in harsh industrial environments; Resistant to various aggressive chemicals

Monitoring range

Range with fiber optic amplifier type	OCF; OKF; OUF
OCF (High Power)	
Range fiber optics [mm]	280
OKF	
Range fiber optics [mm]	15
OUF	
Range fiber optics [mm]	15

Operating conditions

Ambient temperature [°C]	-20...80
--------------------------	----------

Mechanical data

Weight [g]	84.5
Version of sensing head	straight
Sensing head thread	M6
Total length [mm]	1200
Min. bending radius [mm]	20
Fiber arrangement	◎
Fiber material	PMMA
Fiber head material	stainless steel (1.4305 / 303)
Fiber sheath material	metal silicone

E20571



Fiber optic diffuse reflection sensor

FT-00-MPV-M6/1,2M

Accessories

Items supplied

Hexagon nuts: 2 x M6, stainless steel

tooth lock washers: 2

Knurled nut: 1 x M11

Remarks

Pack quantity

1 pcs.