


E74010



AS-Interface flat cable

Flat cable 100 meter EPDM bk

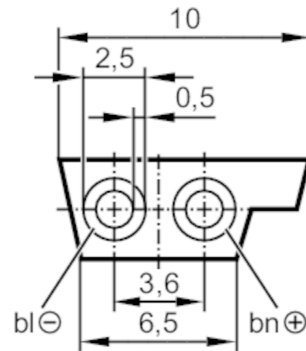

| Application | |
|--|---|
| System | Halogen-free |
| Design | for use of insulation displacement technology |
| Application | external 24 V power supply |
| Electrical data | |
| Operating voltage [V] | 24 DC |
| Operating conditions | |
| Ambient temperature [°C] | -40...85 |
| Mechanical data | |
| Weight [g] | 7104 |
| Remarks | |
| Remarks | 100 m form supplied: coiled |
| Pack quantity | 100 m |
| Electrical connection | |
| Cable: 100 m, EPDM, Halogen-free, black; 2 x 1.5 mm ² | |