
E74310

AS-Interface flat cable



Flat cable 100 m Process bk

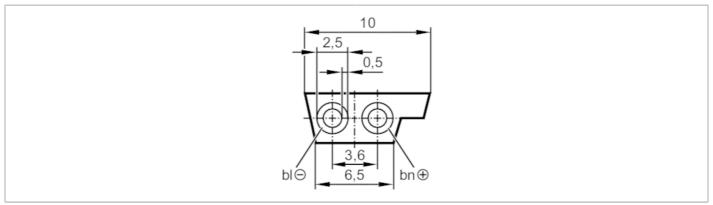

Application		
Design		for use of insulation displacement technology
Application		food industry; external 24 V power supply
Electrical data		
Operating voltage	[V]	24 DC; (Peak voltage 300 V)
Operating conditions		
Ambient temperature	[°C]	-40105
Mechanical data		
Weight	[g]	6791
Remarks		
Remarks		100 m form supplied: coiled
Pack quantity		100 m
Electrical connection		
Cable: 100 m, TPE-PVC compound, black; 2 x 1.5 mm ²		