


EBC057



Wiring block

ZD08F04HMSS0010H10

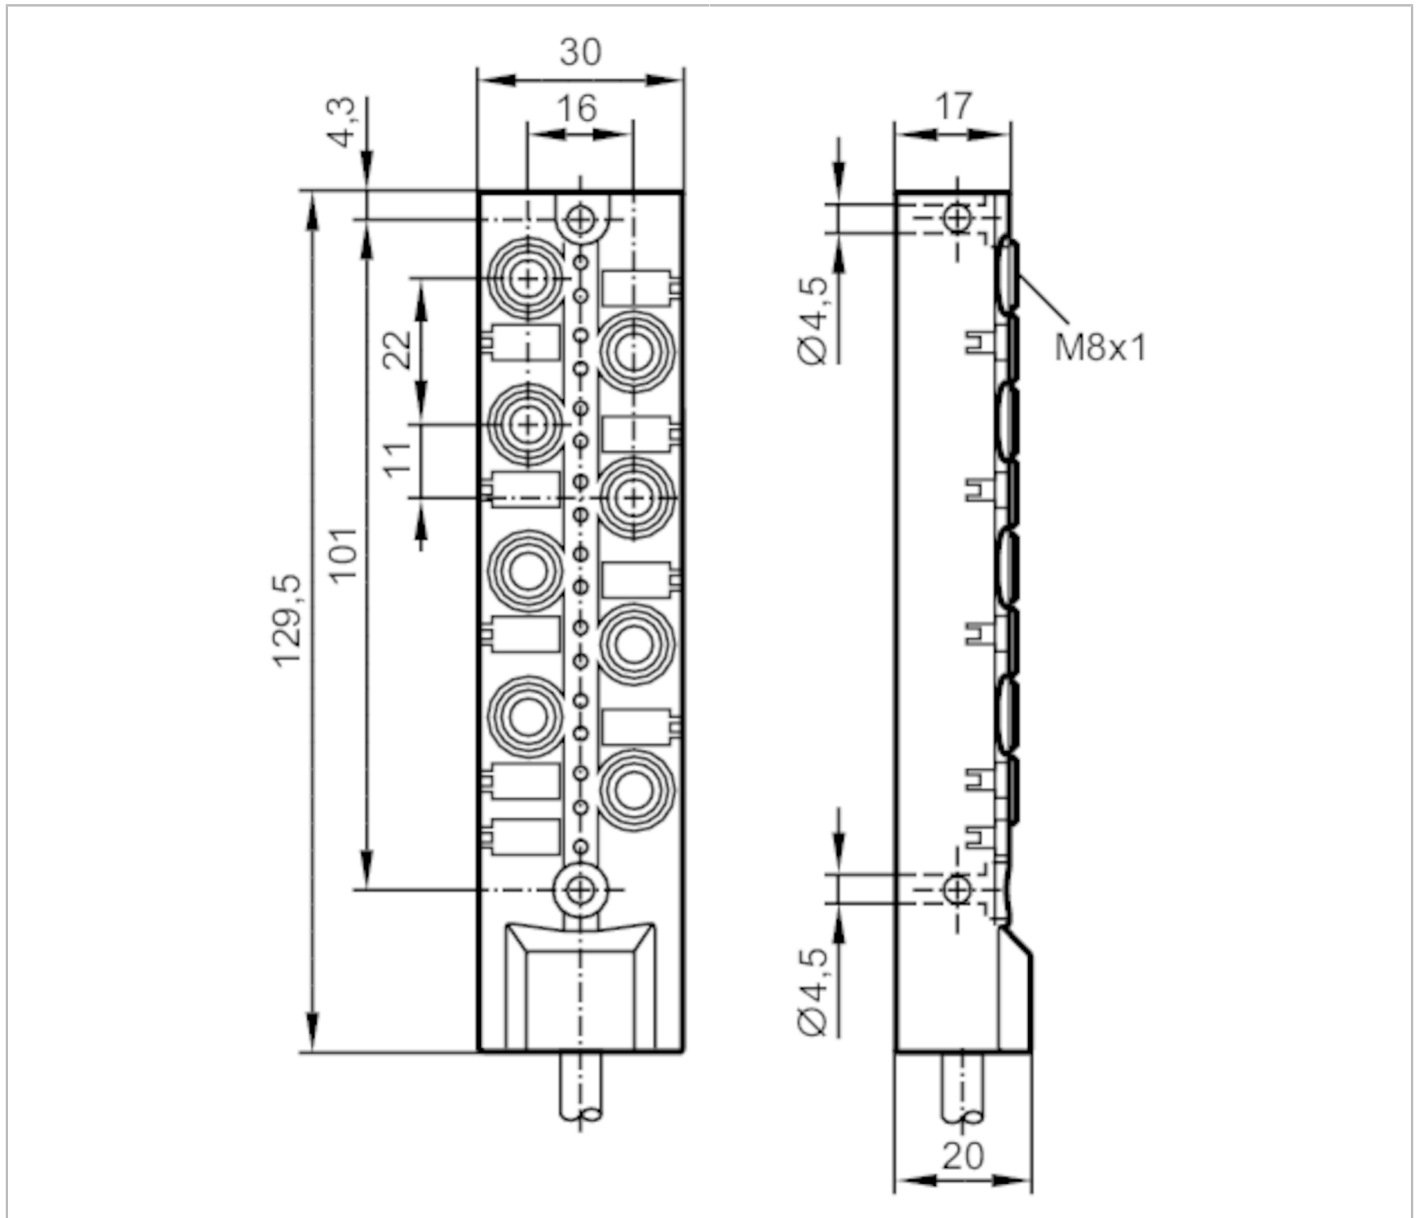

Application	
System	gold-plated contacts; Drag chain suitability
Electrical data	
Operating voltage [V]	10...30 DC; (cULus - Class 2 source required)
Protection class	III
Max. current load per module/slot [A]	2
Max. current load total [A]	6
Outputs	
Electrical design	PNP
Operating conditions	
Ambient temperature [°C]	-25...80

EBC057



Wiring block

ZDO8F04HMSS0010H10

Ambient temperature (moving) [°C]	-5...60
Protection	IP 65; IP 67; IP 68

Mechanical data

Weight [g]	1247
Dimensions [mm]	20 x 30 x 129.5
Material	PBT-GF20; brass nickel-plated
Molded-body material	PBT-GF 20 / brass, nickel-plated
Number of ports splitter box	8
Connector type	M8
Drag chain suitability	yes
Drag chain suitability	Bending radius for flexible applications min. 10 x cable diameter
	Travel speed max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s ²
	Bending cycles > 5 Mio.
	Torsional strain ± 180 °/m

Displays / operating elements

Display	Switching status	16 x LED, yellow
	Power	1 x LED, green

Accessories

Accessories (optional)	DIN rail adapter:, E73007
	Protective cap: M8, E73005

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PUR, black, Ø 8.5 mm; 16 x 0.34 mm² (43 x Ø 0.1 mm) + 2 x 0.75 mm² (21 x Ø 0.2 mm)

Electrical connection - slot

Connector: 8 x M8; coding: A; Moulded body: PBT-GF 20 / brass, nickel-plated; Contacts: gold-plated




EBC057



Wiring block

ZDO8F04HMSS0010H10

Connection

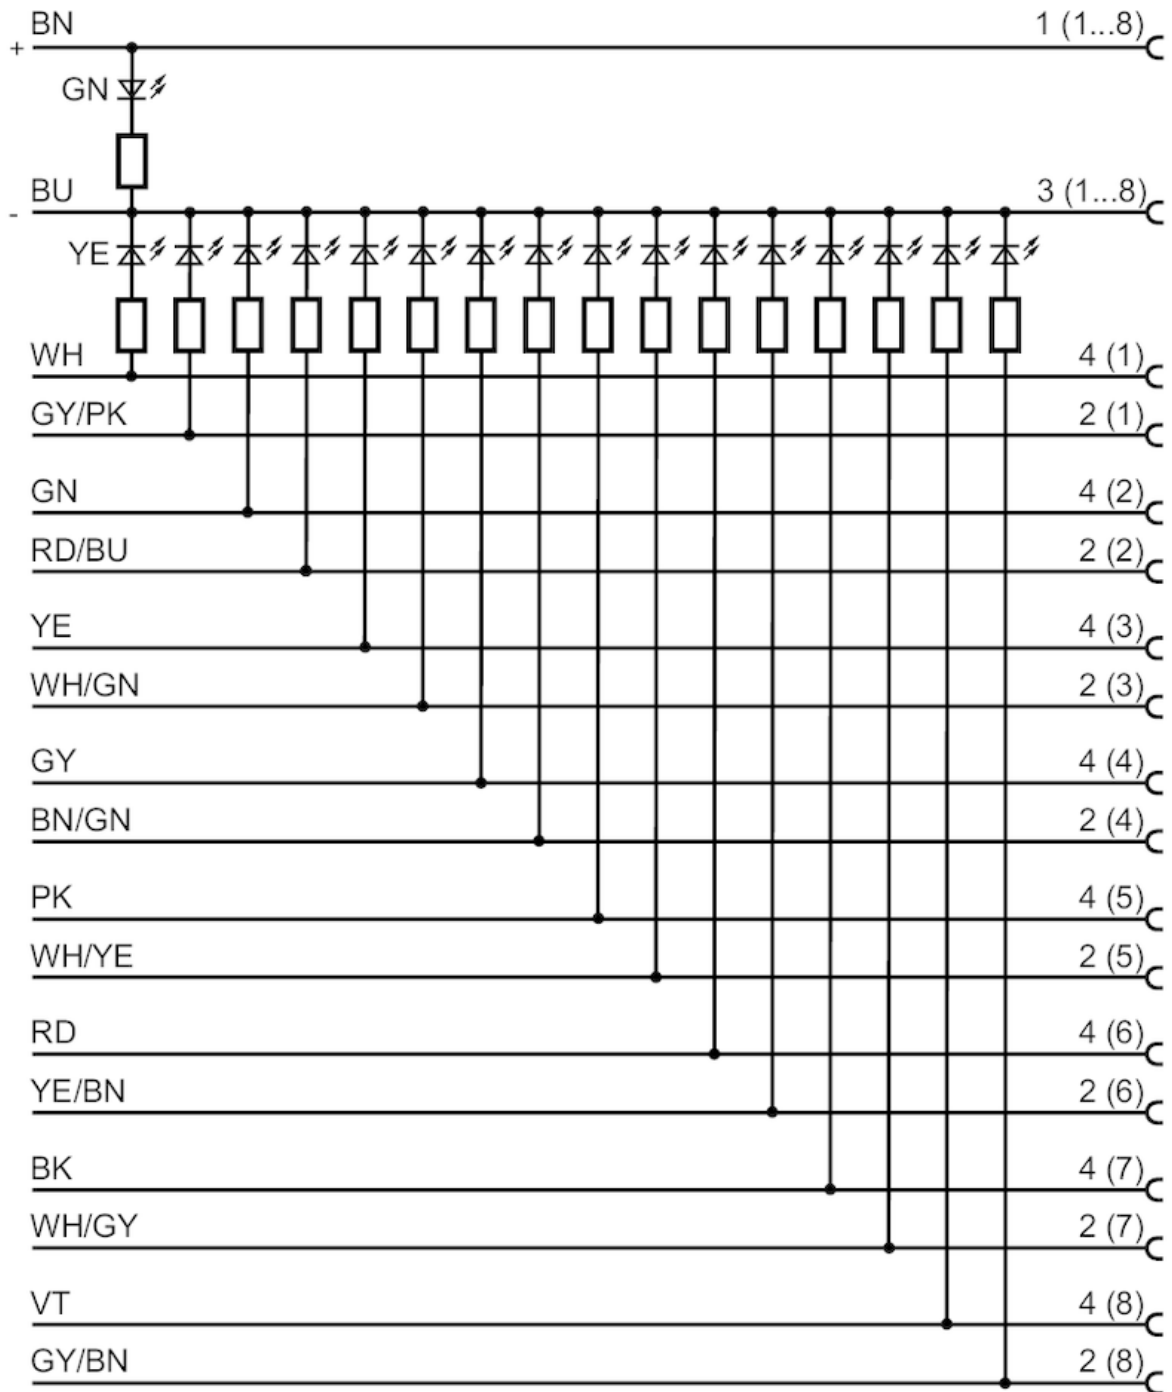

	Core colors :
BK =	black
BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
VT =	lilac
WH =	white
YE =	yellow

EBC057

Wiring block

ZD08F04HMSS0010H10

