


LDL101



Conductive conductivity sensor

COND CONDUCTIVITY UPW HYG G1/2

Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.

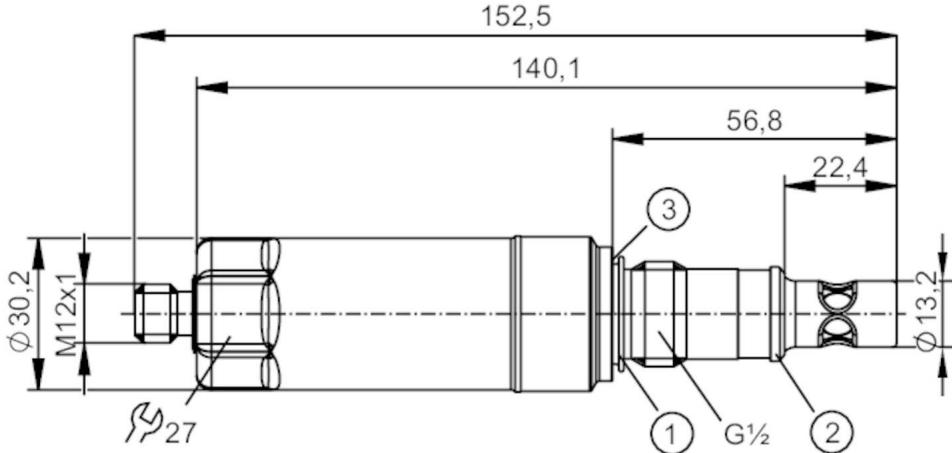

- 1 Gasket FKM (for sealing on the back - not pressure resistant) / removable
- 2 pre-mounted PEEK sealing ring (removable) / metallic sealing area
- 3 groove for sealing ring DIN 3869-21

A³ CE cUL^{us} LISTED EC 1935/2004 EHEDG Certified FCM FDA IO-Link UK CA

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1
Process connection	threaded connection G 1/2 external thread sealing cone optional:hygienic PEEK gasket according to EHEDG

Application

System	gold-plated contacts
Media	Conductive liquids
Note on media	ultra-pure water
Cannot be used for	See the operating instructions, chapter "Function and features".
Medium temperature [°C]	-25...100; (< 1 h: 150)
Pressure rating [bar]	16
Vacuum resistance [mbar]	-1000

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	< 60
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	2
Measuring principle	konduktiv

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
Output signal	analog signal; IO-Link

LDL101



Conductive conductivity sensor

COND CONDUCTIVITY UPW HYG G1/2

Output function	analog output; scalable; selectable conductivity / temperature	
Number of analog outputs		1
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Measuring/setting range		
conductivity measurement		
Measuring range	[µS/cm]	0.04...1000
Resolution	[µS/cm]	0...9,999 10...99,99 100...1000
		0.001 0.01 0.1
Temperature measurement		
Measuring range	[°C]	-25...150
Accuracy / deviations		
conductivity measurement		
Accuracy (in the measuring range)		3 % MW ± 0,03 µS/cm
Drift	[%/K]	0,1 %/K MW
Repeatability		1 % MW ± 0,010 µS/cm
Long-term stability		1,5 % MW ± 0,015 µS/cm
Temperature measurement		
Accuracy	[K]	20...50 °C: < ± 0,5 K; -25...150 °C: < ± 1,5 K
Repeatability	[K]	0,2
Resolution	[K]	0,1
Reaction times		
conductivity measurement		
Response time	[s]	< 2; (T09; Damping = 0)
Temperature measurement		
Response time	[s]	< 9; (T09)
Interfaces		
Communication interface		
Transmission type		IO-Link
IO-Link revision		COM2 (38,4 kBaud)
SDCI standard		1.1
Profiles		IEC 61131-9
SIO mode		Measuring Sensor, Identification and Diagnosis
Required master port class		no
Process data analog		A
Min. process cycle time	[ms]	1
Supported DeviceIDs	Type of operation	DeviceID
	default	1455
Operating conditions		
Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85

LDL101



Conductive conductivity sensor


COND CONDUCTIVITY UPW HYG G1/2

Protection	IP 68; IP 69K; (7 days / 3 m water depth / 0.3 bar: IP 68)			
Tests / approvals				
EMC	DIN EN 61000-6-2			
	DIN EN 61000-6-3			
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)		
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)		
MTTF [years]		173		
Mechanical data				
Weight [g]		329.9		
Material	stainless steel (1.4404 / 316L); PEI; FKM			
Materials (wetted parts)	stainless steel (1.4435 / 316L); PEEK			
Process connection	threaded connection G 1/2 external thread sealing cone optional:hygienic PEEK gasket according to EHEDG			
Remarks				
Remarks	MW = Measured value			
Notes	Digital meets analog: integrating modern IO-Link sensors the analog way. The EIO104 allows you to realize two analog signals from intelligent IO-Link sensors with several process values.			
Pack quantity	1 pcs.			
Electrical connection				
Connector: 1 x M12 (EN 61067-2-101); coding: A; Contacts: gold-plated				
				

Conductive conductivity sensor

COND CONDUCTIVITY UPW HYG G1/2

Connection

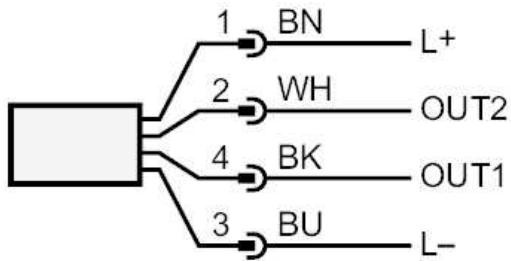

OUT1	IO-Link
OUT2	analog output
	Colors to DIN EN 60947-5-2
	Core colors :
BK =	black
BN =	brown
BU =	blue
WH =	white