

LR8300




Continuous level sensor (guided wave radar)

LR0000B-BN34ASPKG/US

For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

For 8-wire cordsets the core colors are not standardized.
Please note the wiring of the sensor and the cordsets (see data sheet).
Please see the technical note under "Downloads"

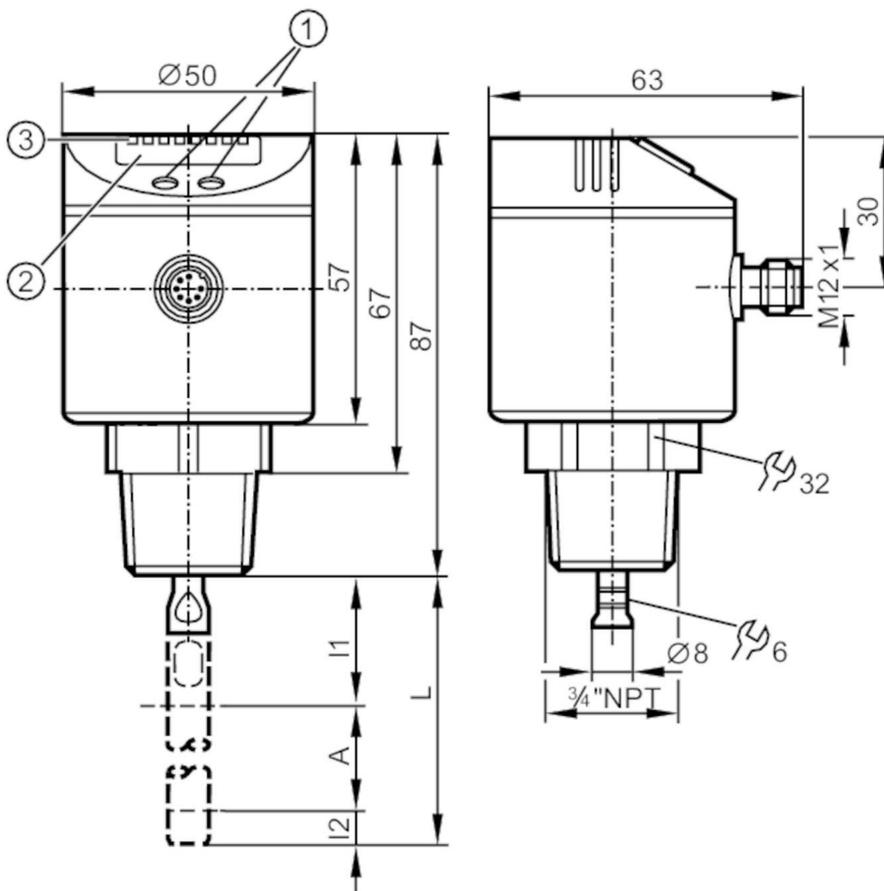

- 1 alphanumeric display 4-digit
- 2 LEDs Display unit / Switching status
- 3 Programming buttons
- A Active zone
- I1 / I2 Inactive ranges



| Product characteristics | |
|------------------------------|--|
| Number of inputs and outputs | Number of digital outputs: 4 |
| Probe length L [mm] | 100...1600 |
| Process connection | threaded connection 3/4" NPT external thread |
| Application | |
| System | gold-plated contacts |
| Application | for industrial applications |
| Media | Liquids |

LR8300



Continuous level sensor (guided wave radar)

LR0000B-BN34ASPKG/US

| | | |
|--|--------|--|
| Dielectric constant of the medium | | ≥ 5 |
| Recommended media | | water; water-based media |
| Cannot be used for | | See the operating instructions, chapter "Function and features". |
| Process temperature | [°C] | -25...80; (90 < 1 h ; see note under remarks) |
| Pressure rating | [bar] | 16 |
| Vacuum resistance | [mbar] | -1000 |
| MAWP (for applications according to CRN) | [bar] | 16 |

Electrical data

| | | |
|-----------------------------|------|-------------------|
| Operating voltage | [V] | 18...30 DC |
| Current consumption | [mA] | < 30 |
| Protection class | | III |
| Reverse polarity protection | | yes |
| Power-on delay time | [s] | < 3 |
| Measuring principle | | guided wave radar |

Inputs / outputs

| | | |
|------------------------------|--|------------------------------|
| Number of inputs and outputs | | Number of digital outputs: 4 |
|------------------------------|--|------------------------------|

Outputs

| | | |
|---|------|--|
| Total number of outputs | | 4 |
| Output signal | | switching signal; IO-Link |
| Electrical design | | PNP |
| Number of digital outputs | | 4 |
| Output function | | normally open / closed; (configurable) |
| Max. voltage drop switching output DC | [V] | 2.5 |
| Permanent current rating of switching output DC | [mA] | 200 |
| Short-circuit protection | | yes |
| Type of short-circuit protection | | thermal, pulsed |
| Overload protection | | yes |

Measuring/setting range

| | | |
|------------------------|------|------------|
| Probe length L | [mm] | 100...1600 |
| Active range A | [mm] | L-40 |
| Inactive range I1 / I2 | [mm] | 30 / 10 |
| Sampling rate | [Hz] | 4 |

Setting range

| | | |
|----------------|------|------------|
| Set point SP | [mm] | 15...L-30 |
| Reset point rP | [mm] | 10... L-35 |
| In steps of | [mm] | 5 |
| Hysteresis | [mm] | > 5 |

Accuracy / deviations

| | | |
|-----------------|------|-----|
| Repeatability | [mm] | ± 5 |
| Measuring error | [mm] | ± 7 |

LR8300



Continuous level sensor (guided wave radar)

LR0000B-BN34ASPKG/US

| | | |
|----------------------------|------|---------|
| Offset error | [mm] | 5 |
| Resolution | [mm] | 1 |
| Temperature drift per 10 K | | ± 0.2 % |

| Interfaces | | |
|----------------------------|--------------------------|-------------------|
| Communication interface | | IO-Link |
| Transmission type | | COM2 (38,4 kBaud) |
| IO-Link revision | | 1.1 |
| SDCI standard | | IEC 61131-9 CDV |
| Profiles | | no profile |
| SIO mode | | yes |
| Required master port class | | A |
| Process data analog | | 1 |
| Process data binary | | 4 |
| Min. process cycle time | [ms] | 2.3 |
| Supported DeviceIDs | Type of operation | DeviceID |
| | default | 11 |

| Operating conditions | | |
|----------------------|------|----------|
| Ambient temperature | [°C] | -25...60 |
| Storage temperature | [°C] | -40...85 |
| Protection | | IP 67 |

| Tests / approvals | | |
|----------------------|-------------------|--|
| EMC | DIN EN 61000-6-2 | |
| | DIN EN 61000-6-3 | in a closed metal tank |
| | DIN EN 61000-6-4 | in plastic or open metal tanks |
| Shock resistance | DIN EN 60068-2-27 | 50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m |
| Vibration resistance | DIN EN 60068-2-6 | 5 g (10...2000 Hz) / 1 g (5...200 Hz) with reference rod 0.5 m |
| MTTF | [years] | 205 |

| Mechanical data | | |
|--------------------------|-----|--|
| Weight | [g] | 351.5 |
| Material | | stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); FKM; PBT; PC; PEI; TPE-V |
| Materials (wetted parts) | | stainless steel (1.4305 / 303); probe connection: stainless steel (1.4435 / 316L); PTFE; FKM |
| Process connection | | threaded connection 3/4" NPT external thread |

| Displays / operating elements | | |
|-------------------------------|-------------------|-------------------------------|
| Display | Display unit | 3 x LED, green |
| | Switching status | 4 x LED, yellow |
| | Level | alphanumeric display, 4-digit |
| | Parameter setting | alphanumeric display, 4-digit |

| Remarks | | |
|---------------|--|--|
| Notes | | For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher. |
| Pack quantity | | 1 pcs. |

LR8300




Continuous level sensor (guided wave radar)


LR0000B-BN34ASPKG/US

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

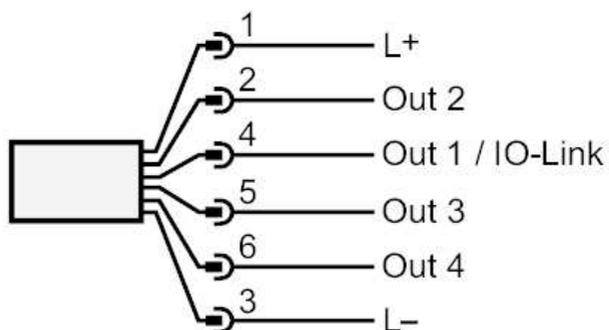

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

