


PA3228



Pressure transmitter with ceramic measuring cell

PA-,25BRBN14-A-ZVG/US / IV

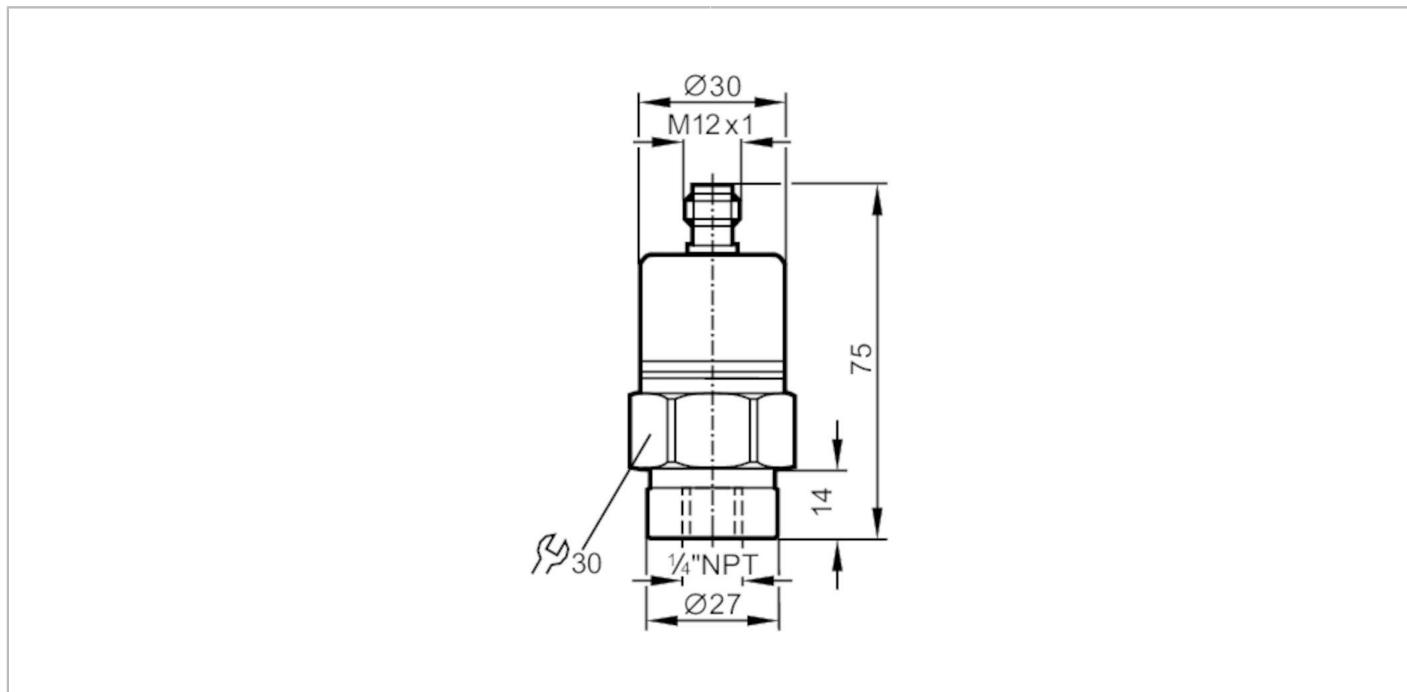

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1		
Measuring range	0...0.25 bar	0...250 mbar	0...100.3 inH2O 0...25 kPa
Process connection	threaded connection 1/4" NPT Internal thread		

Application

System	gold-plated contacts		
Application	for industrial applications		
Media	liquids and gases		
Medium temperature [°C]	0...100	-25...90; (on request: -40...90 °C)	
Min. bursting pressure	30000 mbar	12030 inH2O	3000 kPa
Pressure rating	6000 mbar	2400 inH2O	600 kPa
Type of pressure	relative pressure		

Electrical data

Operating voltage [V]	9.6...32 DC		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1		
------------------------------	-----------------------------	--	--

Outputs

Total number of outputs	1		
Output signal	analog signal		
Number of analog outputs	1		
Analog current output [mA]	4...20		

PA3228



Pressure transmitter with ceramic measuring cell

PA-25BRBN14-A-ZVG/US/ IV

Max. load	[Ω]	720; (Ub = 24 V; (Ub - 9,6 V) / 20 mA)		
Overload protection		yes		
Measuring/setting range				
Measuring range	0...0.25 bar	0...250 mbar	0...100.3 inH ₂ O	0...25 kPa
Accuracy / deviations				
Repeatability	[% of the span]	< 0,1; (with temperature fluctuations < 10 K)		
Characteristics deviation	[% of the span]	< ± 0,25 (BFSL) / < ± 0,5 (LS); (BFSL = Best Fit Straight Line; LS = limit value setting)		
Long-term stability	[% of the span]	< ± 0,05; (per 6 months)		
Temperature coefficient zero point	[% of the span / 10 K]	0,2; (0...80 °C)		
Temperature coefficient span	[% of the span / 10 K]	0,3; (0...80 °C)		
Reaction times				
Step response time analog output	[ms]	3		
Operating conditions				
Ambient temperature	[°C]	-25...80		
Storage temperature	[°C]	-40...100		
Protection		IP 65		
Tests / approvals				
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD		
	EN 61000-4-3 HF radiated	30 V/m		
	EN 61000-4-4 Burst	2 kV		
	EN 61000-4-6 HF conducted	10 V		
	radiation of interference	according to the automotive directive 2004/104/EC		
	CISPR 25			
	noise immunity	according to the automotive directive 2004/104/EC		
	ISO 11452-2 HF radiated	100 V/m		
Shock resistance	ISO 7637-2 pulse	severity level 4		
	DIN EN 60068-2-27	50 g (11 ms)		
Vibration resistance	DIN EN 61373	Category 3		
	DIN EN 60068-2-6	20 g (10...2000 Hz)		
MTTF	DIN EN 61373	Category 2		
	[years]	514		
	Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request		
Railway applications	DIN EN 50155 / IEC 60571	Klasse T3, C1, S1		
Mechanical data				
Weight	[g]	224		
Material		stainless steel (1.4404 / 316L); FKM; PA; EPDM/X		
Materials (wetted parts)		stainless steel (1.4305 / 303); ceramics (99.9 % Al ₂ O ₃); FKM		
Min. pressure cycles		100 million		
Process connection		threaded connection 1/4" NPT Internal thread		

PA3228



Pressure transmitter with ceramic measuring cell

PA-,25BRBN14-A-ZVG/US / IV


Restrictor element integrated	no (can be retrofitted)
-------------------------------	-------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

