
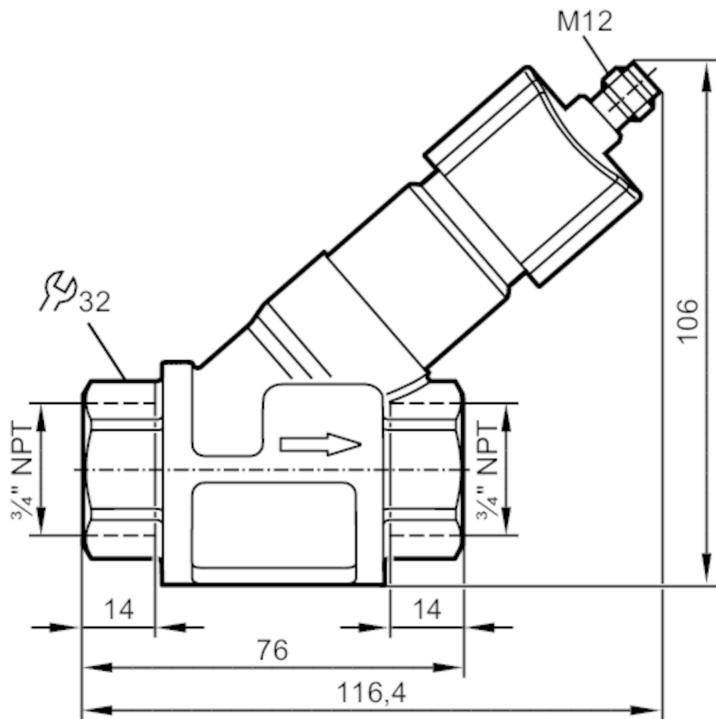


## Flow transmitters with fast response time

SBN34HF010KG/US

Please note the changed housing design!

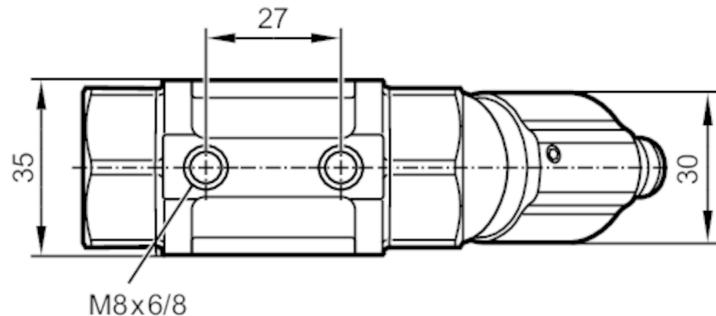

### Product characteristics

Measuring range	[gpm]	0.2...6
-----------------	-------	---------

Process connection		3/4" NPT
--------------------	--	----------

### Application

Media	Liquids; water; glycol solutions; Coolants
-------	--

Medium temperature	[°F]	14...212
--------------------	------	----------

Pressure rating	[bar]	40
-----------------	-------	----

Pressure rating	[MPa]	4
-----------------	-------	---

### Electrical data

Operating voltage	[V]	18...32 DC; (to SELV/PELV)
-------------------	-----	----------------------------

# SBN433



## Flow transmitters with fast response time

SBN34HF010KG/US

Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
<strong>Outputs</strong>		
Output signal		analog signal
Analog current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes
<strong>Measuring/setting range</strong>		
Measuring range	[gpm]	0.2...6
<strong>Accuracy / deviations</strong>		
Repeatability	[% of the final value]	1
Measuring error	[% of the final value]	± 5
<strong>Reaction times</strong>		
Response time	[s]	< 0.01
<strong>Operating conditions</strong>		
Ambient temperature	[°F]	32...140
Storage temperature	[°F]	5...176
Protection		IP 65; IP 67
<strong>Tests / approvals</strong>		
EMC		DIN EN 61000-6-2
		DIN EN 61000-6-3
Shock resistance		DIN EN 60068-2-27
Vibration resistance		DIN EN 60068-2-6
MTTF	[years]	778
<strong>Mechanical data</strong>		
Weight	[g]	476
Material		brass chemically nickel-plated; PP; stainless steel (1.4404 / 316L); aluminum anodized; PA
Materials (wetted parts)		stainless steel (1.4401 / 316); brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM
Process connection		3/4" NPT
Switching cycles mechanical		10 million
<strong>Remarks</strong>		
Remarks		Recommendation Use 200 micron filtration All data refer to water (68 °F).
Notes		Please note the changed housing design!
Pack quantity		1 pcs.

## Flow transmitters with fast response time


SBN34HF010KG/US

### Electrical connection

Connector: 1 x M12; coding: A



### Connection

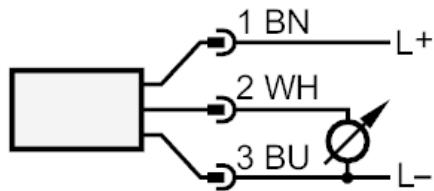


Colors to DIN EN 60947-5-2

Core colors:

BN =	brown
BU =	blue
WH =	white

### Diagrams and graphs

Pressure loss

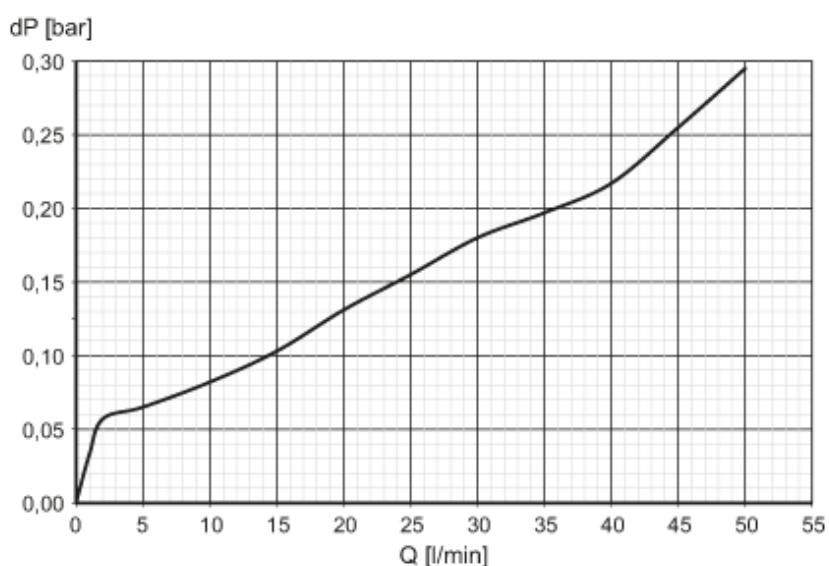

dP Pressure loss

Q volumetric flow quantity