

# SD6100



## Flow rate meter for gases


SDR12DGXFPKG/US-100

Article to be discontinued

Discontinuation date: 12/31/2024

Alternative articles: SD6600

When selecting an alternative article and accessories please note that technical data may differ!

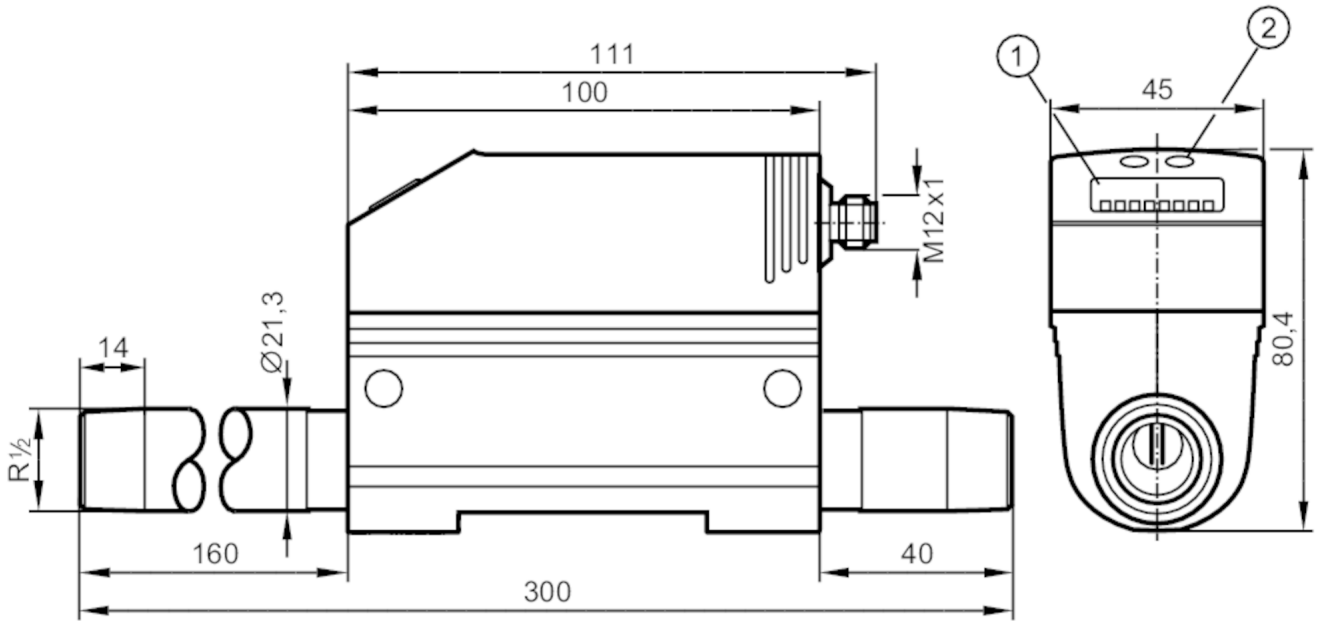

- 1 alphanumeric display 4-digit
- 2 Programming buttons



### Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Process connection	threaded connection R 1/2 DN15	
Ar		
Measuring range	[m <sup>3</sup> /h]	0.4...122
CO <sub>2</sub>		
Measuring range	[m <sup>3</sup> /h]	0.2...74.7
N <sub>2</sub>		
Measuring range	[m <sup>3</sup> /h]	0.2...75

### Application

Application	for industrial applications	
Media	Argon (Ar); carbon dioxide (CO <sub>2</sub> ); nitrogen (N <sub>2</sub> )	
Medium temperature	[°C]	0...60
Pressure rating	[bar]	16
Pressure rating	[MPa]	1.6

### Electrical data

Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Current consumption	[mA]	< 100

# SD6100



## Flow rate meter for gases

SDR12DGXFPKG/US-100

Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	1

### Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
------------------------------	---

### Outputs

Total number of outputs	2
Output signal	switching signal; analog signal; pulse signal; IO-Link; (configurable)
Electrical design	PNP
Number of digital outputs	2
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	250; (per output)
Number of analog outputs	1
Analog current output [mA]	4...20; (scalable)
Max. load [ $\Omega$ ]	500
Pulse output	consumed quantity meter
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

### Measuring/setting range

Low flow cut-off LFC [m <sup>3</sup> /h]	< 1.3
Measuring dynamics	1:300

<b>Ar</b>	
Measuring range [m <sup>3</sup> /h]	0.4...122
Display range [m <sup>3</sup> /h]	0...146.4
Resolution [m <sup>3</sup> /h]	0.1
Set point SP [m <sup>3</sup> /h]	1.1...122
Reset point rP [m <sup>3</sup> /h]	0.6...121.5
Analog start point ASP [m <sup>3</sup> /h]	0...97.6
Analog end point AEP [m <sup>3</sup> /h]	24.4...122
In steps of [m <sup>3</sup> /h]	0.1

<b>CO2</b>	
Measuring range [m <sup>3</sup> /h]	0.2...74.7
Display range [m <sup>3</sup> /h]	0...89.7
Resolution [m <sup>3</sup> /h]	0.1
Set point SP [m <sup>3</sup> /h]	0.7...74.7
Reset point rP [m <sup>3</sup> /h]	0.4...74.4
Analog start point ASP [m <sup>3</sup> /h]	0...59.8
Analog end point AEP [m <sup>3</sup> /h]	14.9...74.7
In steps of [m <sup>3</sup> /h]	0.1

# SD6100



## Flow rate meter for gases

SDR12DGXFPKG/US-100

Volumetric flow quantity monitoring		
Pulse value		0.001...1 000 000 m <sup>3</sup>
In steps of		0.001...1000 m <sup>3</sup>
Pulse length	[s]	0,012...2
N2		
Measuring range	[m <sup>3</sup> /h]	0.2...75
Display range	[m <sup>3</sup> /h]	0...90
Resolution	[m <sup>3</sup> /h]	0.1
Set point SP	[m <sup>3</sup> /h]	0.7...75
Reset point rP	[m <sup>3</sup> /h]	0.4...74.7
Analog start point ASP	[m <sup>3</sup> /h]	0...60
Analog end point AEP	[m <sup>3</sup> /h]	15...75
In steps of	[m <sup>3</sup> /h]	0.1
Temperature monitoring		
Measuring range	[°C]	0...60
Display range	[°C]	-12...72
Resolution	[°C]	0.2
Set point SP	[°C]	0.4...60
Reset point rP	[°C]	0...59.8
Analog start point	[°C]	0...48
Analog end point	[°C]	12...60
In steps of	[°C]	0.2
Accuracy / deviations		
Flow monitoring		
Repeatability	[% of the measured value]	± 1,5
Accuracy (in the measuring range)		± (6 % MW + 0,6 % MEW); (conditions: installation to DIN ISO 2533; installation in pipes: DN15)
Temperature monitoring		
Accuracy	[K]	± 2; (medium flow in the limit area of the flow measurement range)
Reaction times		
Flow monitoring		
Response time	[s]	0.1; (dAP = 0)
Damping process value dAP in steps	[s]	0 - 0,2 - 0,4 - 0,6 - 0,8 - 1
Software / programming		
Parameter setting options		Flow monitoring; quantity meter; Preset counter; hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; medium selection
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1

# SD6100



## Flow rate meter for gases

SDR12DGXFPKG/US-100

SDCI standard	IEC 61131-9	
Profiles	Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis	
SIO mode	yes	
Required master port class	A	
Process data analog	3	
Process data binary	2	
Min. process cycle time [ms]	4.1	
Supported DeviceIDs	<b>Type of operation</b>	<b>DeviceID</b>
	default	265

Operating conditions		
Ambient temperature [°C]		0...60
Storage temperature [°C]		-20...85
Max. relative air humidity [%]		90
Protection		IP 65

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
CPA approval	model number	003TG
	accuracy class	-
	maximum allowable error	± 7 % FS
	Q (min)	0,2 m³/h (N2)
		0,2 m³/h (CO2)
		0,4 m³/h (Ar)
	Q (t)	-
Q (max)		75 m³/h (N2)
		74,7 m³/h (CO2)
		122 m³/h (Ar)
Vibration resistance	DIN IEC 68-2-6	5 g (55...2000 Hz)
MTTF [years]		227
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data		
Weight [g]		963.5
Material	PBT-GF20; PC; PC; stainless steel (1.4301 / 304); FKM	
Materials (wetted parts)	stainless steel (1.4301 / 304); ceramics glass passivated; PEEK; polyester; FKM; aluminum anodized	
Tightening torque [Nm]		50
Process connection	threaded connection R 1/2 DN15	

Displays / operating elements		
Display	Display unit	4 x LED, green (NI/min, Nm³/h, Nm³, °C)
	Function display	1 x LED, yellow
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit
Display unit	NI/min; Nm³/h; Nm³; °C	

# SD6100



## Flow rate meter for gases

SDR12DGXFPKG/US-100



Remarks	
Remarks	MW = Measured value MEW = Final value of the measuring range Measuring, display and setting ranges refer to standard volume flow according to DIN ISO 2533.
Pack quantity	1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A



### Connection

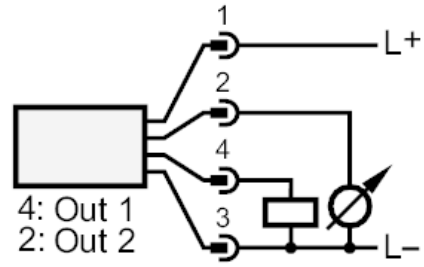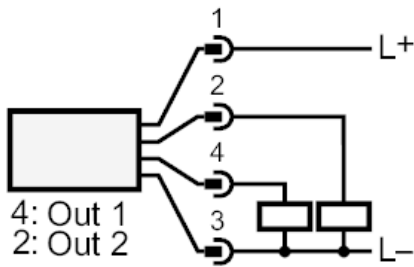

- OUT1:            Switching output  
                 Pulse output quantity meter  
                 signal output Preset counter
- OUT2:            Switching output  
                 analog output