


SM7100



Magnetic-inductive flow meter

SMR34GGXFRKG/US-100

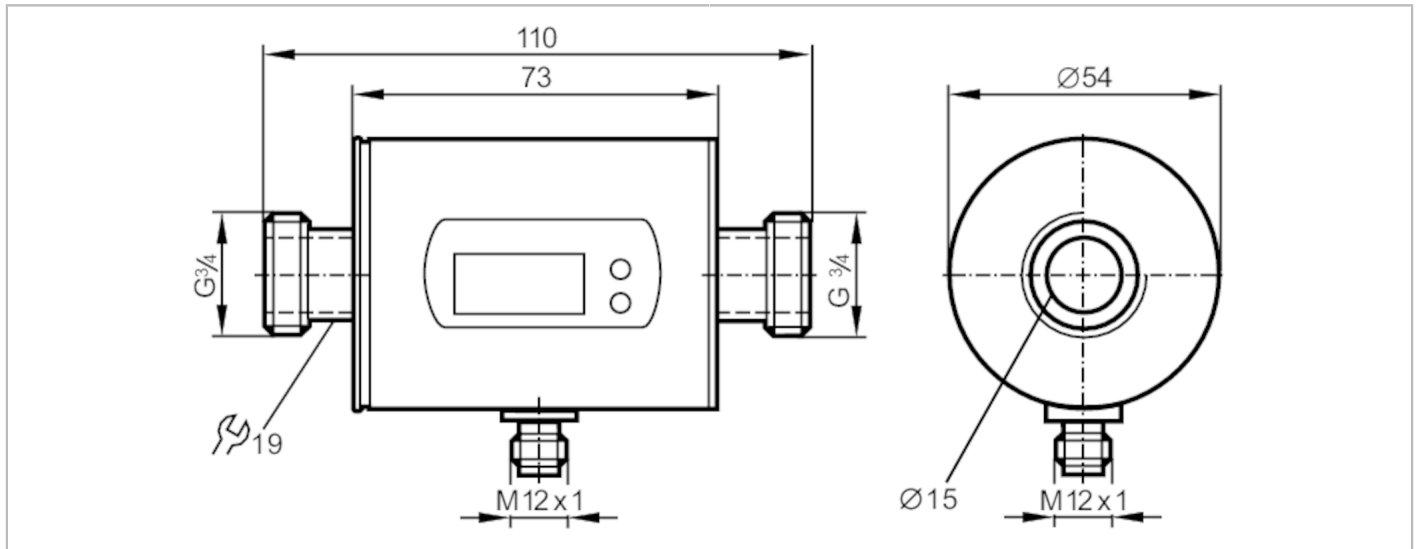

ACS CE PA CRN cUL^{us} LISTED DNV DNV.COM/AF IO-Link KTW/W270 Reg31 UK CA

Product characteristics

| | | |
|------------------------------|---|----------------------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analog outputs: 1 | |
| Measuring range | 0.2...50 l/min | 0.01...3 m ³ /h |
| Process connection | threaded connection G 3/4 DN20 flat seal | |

Application

| | | |
|--|---|----------|
| System | gold-plated contacts | |
| Application | Totalizer function; for industrial applications | |
| Installation | connection to pipe by means of an adapter | |
| Media | Conductive liquids; water; water-based media | |
| Note on media | conductivity: $\geq 20 \mu\text{S/cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C) | |
| Medium temperature | [°C] | -10...70 |
| Pressure rating | [bar] | 16 |
| Pressure rating | [MPa] | 1.6 |
| MAWP (for applications according to CRN) | [bar] | 11.2 |

Electrical data

| | | |
|-----------------------------|------|----------------------------|
| Operating voltage | [V] | 18...30 DC; (to SELV/PELV) |
| Current consumption | [mA] | 95; (24 V) |
| Protection class | | III |
| Reverse polarity protection | | yes |
| Power-on delay time | [s] | 5 |

Inputs / outputs

| | | |
|------------------------------|---|--|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analog outputs: 1 | |
|------------------------------|---|--|

Inputs

| | | |
|--------|---------------|--|
| Inputs | counter reset | |
|--------|---------------|--|

Outputs

| | | |
|-------------------------|---|--|
| Total number of outputs | 2 | |
|-------------------------|---|--|

SM7100



Magnetic-inductive flow meter

SMR34GGXFRKG/US-100

| | | |
|--|--|--|
| Output signal | switching signal; analog signal; pulse signal; IO-Link; (configurable) | |
| Electrical design | PNP/NPN | |
| Number of digital outputs | 2 | |
| Output function | normally open / closed; (configurable) | |
| Max. voltage drop switching output DC [V] | 2 | |
| Permanent current rating of switching output DC [mA] | 200 | |
| Number of analog outputs | 1 | |
| Analog current output [mA] | 4...20; (scalable) | |
| Max. load [Ω] | 500 | |
| Analog voltage output [V] | 0...10; (scalable) | |
| Min. load resistance [Ω] | 2000 | |
| Pulse output | flow rate meter | |
| Short-circuit protection | yes | |
| Type of short-circuit protection | yes (non-latching) | |
| Overload protection | yes | |

Measuring/setting range

| | | |
|------------------------|------------------|---------------------------------|
| Measuring range | 0.2...50 l/min | 0.01...3 m ³ /h |
| Display range | -60...60 l/min | -3.6...3.6 m ³ /h |
| Resolution | 0.1 l/min | 0.001 m ³ /h |
| Set point SP | 0.5...50 l/min | 0.027...3 m ³ /h |
| Reset point rP | 0.2...49.8 l/min | 0.012...2.985 m ³ /h |
| Analog start point ASP | 0...40 l/min | 0...2.4 m ³ /h |
| Analog end point AEP | 10...50 l/min | 0.6...3 m ³ /h |
| In steps of | 0.1 l/min | 0.001 m ³ /h |

Volumetric flow quantity monitoring

| | | |
|------------------|---------------------------------|--|
| Pulse value | 0.00001...50 000 m ³ | |
| Pulse length [s] | 0,005...2 | |

Temperature monitoring

| | | |
|-------------------------|--------------|--|
| Measuring range [°C] | -20...80 | |
| Resolution [°C] | 0.2 | |
| Set point SP [°C] | -19.2...80 | |
| Reset point rP [°C] | -19.6...79.6 | |
| Analog start point [°C] | -20...60 | |
| Analog end point [°C] | 0...80 | |
| In steps of [°C] | 0.2 | |

Accuracy / deviations

Flow monitoring

| | | |
|-----------------------------------|--------------------------|--|
| Accuracy (in the measuring range) | ± (0,8 % MW + 0,5 % MEW) | |
| Repeatability | ± 0,2% MEW | |

Temperature monitoring

| | | |
|--------------|---------------------|--|
| Accuracy [K] | ± 2,5 (Q > 5 l/min) | |
|--------------|---------------------|--|

SM7100



Magnetic-inductive flow meter

SMR34GGXFRKG/US-100

| Reaction times | | |
|--------------------------------|---|------------------------|
| Flow monitoring | | |
| Response time | [s] | 0.15; (dAP = 0, T19) |
| Delay time programmable dS, dr | [s] | 0...50 |
| Damping process value dAP | [s] | 0...5 |
| Temperature monitoring | | |
| Dynamic response T05 / T09 | [s] | T09 = 20 (Q > 5 l/min) |
| Software / programming | | |
| Parameter setting options | Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / closed; switching logic; current/voltage/pulse output; Start-up delay; display can be deactivated; Display unit | |
| Interfaces | | |
| Communication interface | IO-Link | |
| Transmission type | COM2 (38,4 kBaud) | |
| IO-Link revision | 1.1 | |
| SDCI standard | IEC 61131-9 | |
| Profiles | Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis | |
| SIO mode | yes | |
| Required master port class | A | |
| Process data analog | 3 | |
| Process data binary | 2 | |
| Min. process cycle time | [ms] | 5 |
| Supported DeviceIDs | Type of operation | DeviceID |
| | default | 572 |
| Operating conditions | | |
| Ambient temperature | [°C] | -10...60 |
| Storage temperature | [°C] | -25...80 |
| Protection | IP 67 | |
| Tests / approvals | | |
| EMC | DIN EN 60947-5-9 | |
| CPA approval | model number | 001MI |
| | accuracy class | - |
| | maximum allowable error | ± 1,5 % FS |
| | Q (min) | 0,01 m³/h |
| | Q (t) | - |
| | Q (max) | 3 m³/h |
| Shock resistance | DIN IEC 68-2-27 | 20 g (11 ms) |
| Vibration resistance | DIN IEC 68-2-6 | 5 g (10...2000 Hz) |
| MTTF | [years] | 145 |
| Pressure equipment directive | sound engineering practice; can be used for group 2 fluids; group 1 fluids on request | |
| Mechanical data | | |
| Weight | [g] | 586.5 |
| Material | stainless steel (1.4404 / 316L); PBT-GF20; PC; FKM; TPE | |
| Materials (wetted parts) | stainless steel (1.4404 / 316L); PEEK; EPDM | |

SM7100



Magnetic-inductive flow meter

SMR34GGXFRKG/US-100

| | |
|--------------------|--|
| Process connection | threaded connection G 3/4 DN20 flat seal |
|--------------------|--|

Displays / operating elements

| | | |
|---------|------------------|---|
| Display | Display unit | 6 x LED, green (l/min, m ³ /h, l, m ³ , 10 ³ , °C) |
| | Switching status | 2 x LED, yellow |
| | Measured values | alphanumeric display, 4-digit |
| | Programming | alphanumeric display, 4-digit |

Remarks


| | |
|---------------|--|
| Remarks | MW = Measured value |
| | MEW = Final value of the measuring range |
| Pack quantity | 1 pcs. |

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

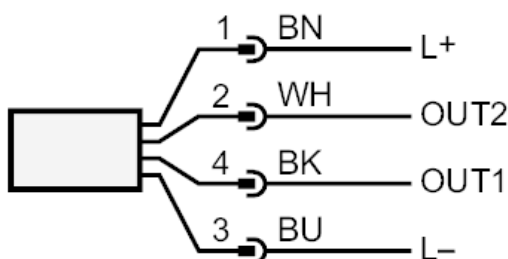

- OUT1: Colors to DIN EN 60947-5-2
 Switching output Volumetric flow quantity monitoring
 Pulse output quantity meter
 signal output Preset counter
 IO-Link
- OUT2: Switching output Volumetric flow quantity monitoring
 Switching output Temperature monitoring
 analog output Volumetric flow quantity monitoring
 analog output Temperature monitoring
 Input counter reset
- Core colors :
- BK = black
 BN = brown
 BU = blue
 WH = white

SM7100




Magnetic-inductive flow meter

SMR34GGXFRKG/US-100

Diagrams and graphs

Pressure loss

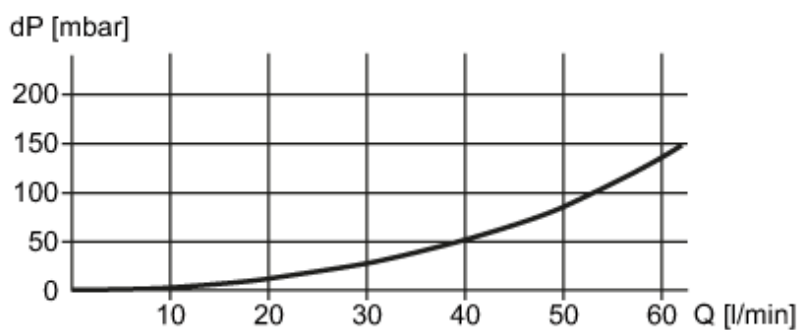

dP Pressure loss

Q volumetric flow quantity