


TW2003



Infrared temperature sensor

TW-030KLBM30-KFDKG/US

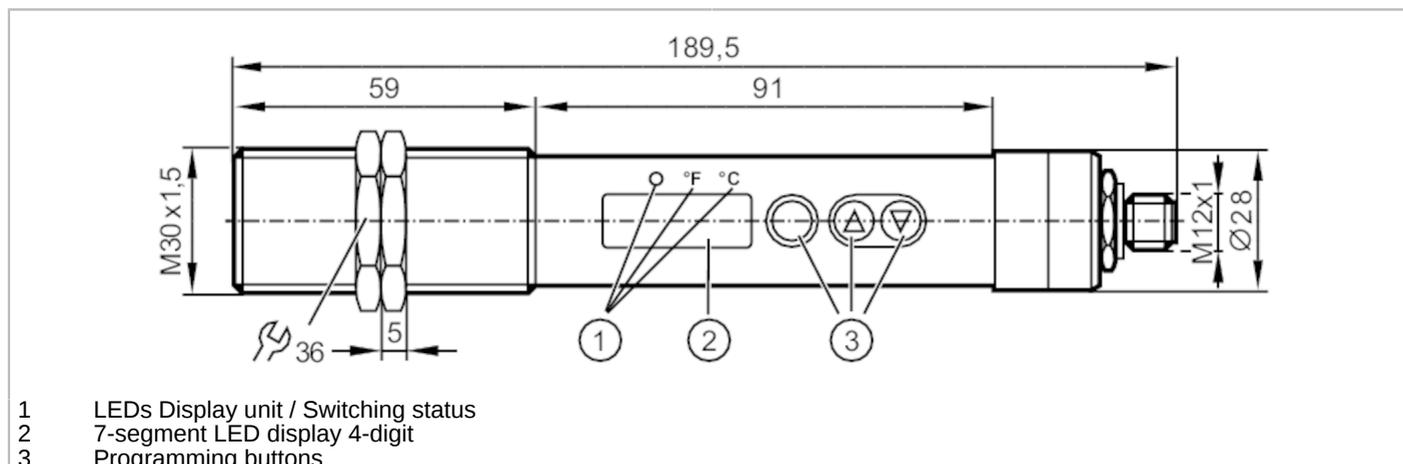

| Product characteristics | |
|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Number of inputs and outputs | Number of digital outputs: 1; Number of analog outputs: 1 |
| Measuring range | -30...300 °C -22...572 °F |
| Communication interface | IO-Link |
| Application | |
| Application | asphalt; coated metal; liquids; glass; rubber; wood; ceramics; plastics; lacquers; food products; paper; fabric |
| Electrical data | |
| Operating voltage [V] | 18...32 DC; (to SELV/PELV) |
| Current consumption [mA] | < 50 |
| Min. insulation resistance [MΩ] | 100; (50 V DC) |
| Protection class | III |
| Reverse polarity protection | yes |
| Power-on delay time [s] | < 1 |
| Inputs / outputs | |
| Number of inputs and outputs | Number of digital outputs: 1; Number of analog outputs: 1 |
| Inputs | |
| Test input | type 3 (IEC 61131-2) |
| Outputs | |
| Total number of outputs | 2 |
| Output signal | switching signal; analog signal; IO-Link; (configurable) |
| Electrical design | PNP |
| Number of digital outputs | 1 |
| Output function | normally open / closed; (configurable) |
| Max. voltage drop switching output DC [V] | 2.5 |
| Permanent current rating of switching output DC [mA] | 150 |
| Number of analog outputs | 1 |
| Analog current output [mA] | 4...20 |

TW2003



Infrared temperature sensor

TW-030KLBM30-KFDKG/US

| | | |
|----------------------------------|-----|--------------------|
| Max. load | [Ω] | 500 |
| Short-circuit protection | | yes |
| Type of short-circuit protection | | yes (non-latching) |
| Short-circuit proof | | yes |
| Overload protection | | yes |

Monitoring range

| | | |
|-------------------|------|--------|
| Wave length range | [μm] | 8...14 |
|-------------------|------|--------|

Measuring/setting range

| | | |
|--------------------|--------------|----------------|
| Measuring range | -30...300 °C | -22...572 °F |
| Set point SP | -29...300 °C | -20.2...572 °F |
| Reset point rP | -30...299 °C | -22...570.2 °F |
| Analog start point | -30...250 °C | -22...482 °F |
| Analog end point | 20...300 °C | 68...572 °F |
| In steps of | 0.5 °C | 1 °F |

Resolution

| | | |
|--------------------------------|-----|-------------------------------------------|
| Resolution of switching output | [K] | 0.5 |
| Resolution of analog output | [K] | 0.2; (+ 0.03 % of the set measuring span) |
| Resolution of display | [K] | 0.5 |

Accuracy / deviations

| | | |
|---------------|-----|-------------------------------------------------------------------------------|
| Accuracy | [K] | $\pm 1\%$; (of measured value, min. 2 K (degree of emission = 1, T = 23 °C)) |
| Repeatability | [K] | 1 |

Reaction times

| | | |
|---------------|------|-----|
| Response time | [ms] | 100 |
|---------------|------|-----|

Software / programming

| | |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Adjustment of the switch point | Programming buttons |
| Parameter setting options | Analog range; normally open / closed; switch-on/switch-off delay; Damping; Peakhold; emissivity; simulation function |

Interfaces

| | | |
|----------------------------|--------------------------|-----------------|
| Communication interface | IO-Link | |
| Transmission type | COM2 (38,4 kBaud) | |
| IO-Link revision | 1.1 | |
| SDCI standard | IEC 61131-9 | |
| SIO mode | yes | |
| Required master port class | A | |
| Process data analog | 16 | |
| Process data binary | 1 | |
| Min. process cycle time | [ms] | 3.6 |
| Supported DeviceIDs | Type of operation | DeviceID |
| | default | 716 |

Operating conditions

| | | |
|---------------------|------|----------|
| Ambient temperature | [°C] | 0...65 |
| Storage temperature | [°C] | -20...80 |

TW2003



Infrared temperature sensor

TW-030KLBM30-KFDKG/US

| | |
|--------------------------------|----------------------|
| Max. relative air humidity [%] | 95; (non condensing) |
| Protection | IP 65 |

Tests / approvals

| | | |
|----------------------|-------------------|--------------------|
| EMC | DIN EN 61000-6-2 | |
| | DIN EN 61000-6-4 | |
| Shock resistance | DIN EN 60068-2-27 | 30 g (11 ms) |
| Vibration resistance | DIN EN 60068-2-6 | 5 g (10...2000 Hz) |

Mechanical data

| | | |
|--------------------|------------------------------------------------------------|--|
| Weight [g] | 410.2 | |
| Housing | Threaded type | |
| Dimensions [mm] | M30 x 1.5 | |
| Thread designation | M30 x 1.5 | |
| Material | threaded sleeve: stainless steel (1.4305 / 303); polyester | |
| Lens material | Infrared transparent crystal lens with anti-reflex coating | |

Displays / operating elements

| | | |
|--------------------|------------------|--------------------------------|
| Display | Display unit | 2 x LED, yellow |
| | Switching status | 1 x LED, yellow |
| | Function display | 7-segment LED display, 4-digit |
| | Measured values | 7-segment LED display, 4-digit |
| Operating elements | 3 | Pushbuttons |

Accessories


| | |
|----------------|--------------|
| Items supplied | lock nuts: 2 |
|----------------|--------------|

Remarks

| | |
|---------------|---------------------------------------------------------------------------------|
| Remarks | Use a screened cable to protect infrared temperature sensors from interference. |
| | The screen must be connected to the housing of the sensor via the connector. |
| Pack quantity | 1 pcs. |

Electrical connection

Connection

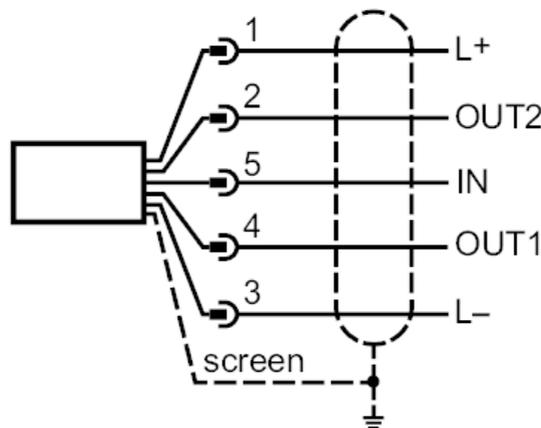

OUT1: Switching output / IO-Link
 OUT2: analog output
 IN: Test input


TW2003




Infrared temperature sensor

TW-030KLBM30-KFDKG/US

Connector: 1 x M12; coding: A



Diagrams and graphs

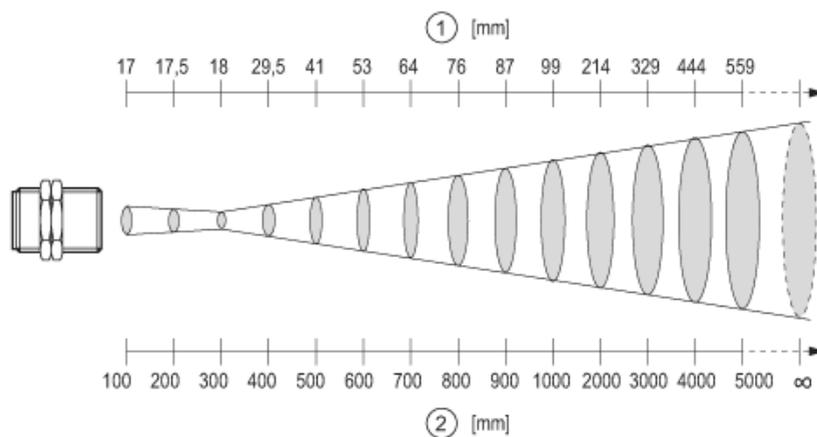

- 1 diameter of the measured spot
- 2 measuring distance