

Inseego's 5G/LTE dipole antenna

High performance 5G antenna for any indoor environment

Why Inseego?

As a U.S.-based company, we design and develop all of our products in the USA and hold them to the highest security standards. Our products and solutions are designed to meet the most rigorous security requirements of top tier carriers, government entities, and fortune 500 enterprise customers.



Inseego 5G dipole antennas provide the best possible coverage from a direct-mount antenna. With built-in isolation and an omnidirectional pattern, these antennas are ground plane independent (no ground plane required; monopole antennas require a large external ground plane), and provide good coverage in any environment. World class RF design allows each antenna to have the best possible gain, efficiency, and return loss in an ideal form factor. This antenna is optimized to cover all bands in the mid and high band range from 1.4 – 6 GHz.

Dipole antenna specifications

Antenna type

1.4-6 GHz dipole omnidirectional whip antenna, ground plane independent

Connector Type

SMA (M)

Antenna dimensions

8.2 x 1.5 x 0.6 in (207 x 38 x 15 mm)

Antenna weight

2 oz (57 g)

Operating temperatures

-40°C to 85°C

Environment

Indoor

Polorization

Linear

Max inpout power

5 W

SKU

649496 02580 9

Frequency range

1427 – 2700 MHz, 3300 – 5000 MHz, 5150 – 5925 MHz

Band coverage


All LTE and 5G Sub6 bands from 1.4-6 GHz

Bands

1, 2, 3, 4, 7, 25, 30, 38, 39, 40, 41, 42, 43, 46, 48, 49, 66, 77, 78, 79

Radiant efficiency	1427 – 1525 MHz	%	70
	1525 – 2700 MHz		80
	3300 – 5000 MHz		70
	5150 – 5925 MHz		70
Peak gain	1427 – 1525 MHz	dBi	2
	1525 – 2700 MHz		3
	3300 – 5000 MHz		3
	5150 – 5925 MHz		3
Return loss (50 Ω)	1427 – 1525 MHz	dB	6
	1525 – 2700 MHz		10
	3300 – 5000 MHz		9
	5150 – 5925 MHz		12

Antenna dimensions (in):

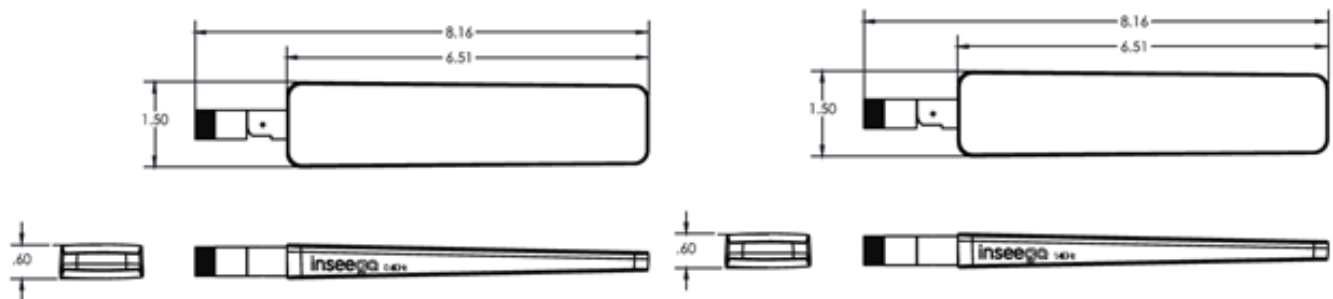

Antenna patterns:

