

# KPC-DN6360NU

750TVL Box Color Camera

[www.ktncusa.com](http://www.ktncusa.com)

- 750TVL Horizontal Resolution
- C/CS Mount Lens
- 1/3"960H Interline CCD
- Min. Illumination of 0.0001 Lux
- True Mechanical Day & Night
- 2D DNR / BLC / ATR / AWB
- DC 12 V / AC 24 V Dual Power




**R**esolution  
960

# Resolution 960

- 750TVL Horizontal Resolution
- C/CS Mount Lens
- 1/3"960H Interline CCD
- Min. Illumination of 0.0001 Lux
- True Mechanical Day & Night
- 2D DNR / BLC / ATR / AWB
- DC 12 V / AC 24 V Dual Power



## General Feature Diagram Unit: (inch)

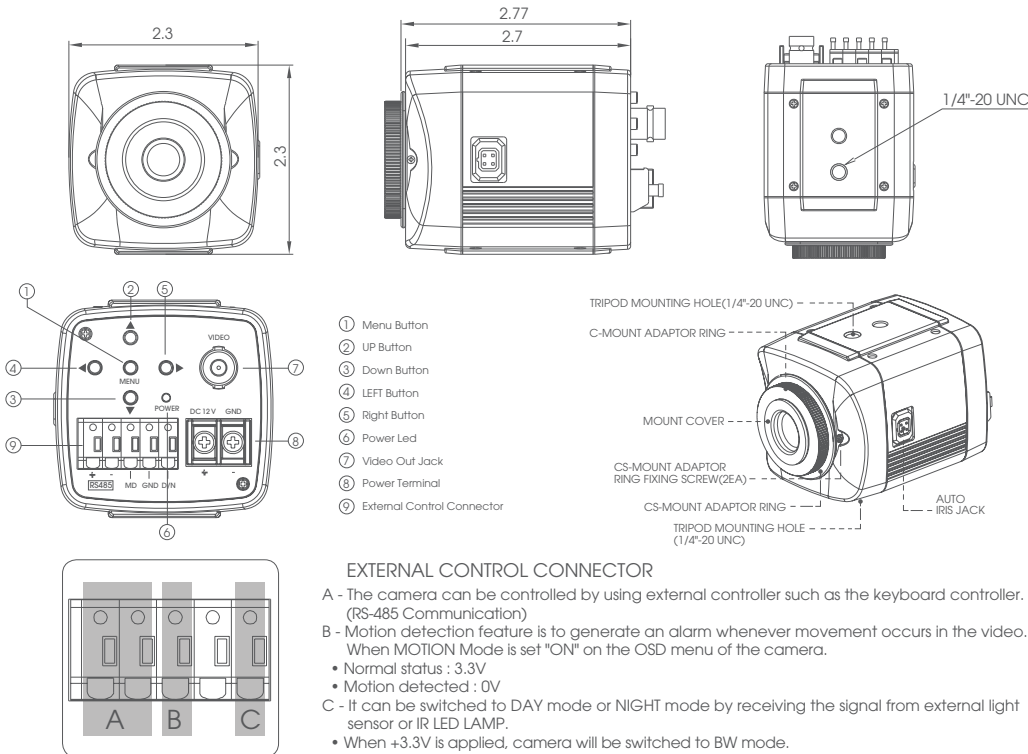

# KPC-DN6360NU

## 750TVL Box Color Camera



## Technical Specification

Signal System	NTSC	
Image Sensor	1/3" 960H Interline CCD	
Scanning System	2:1 Interlace	
Horizontal Resolution	750TV Lines	
Scanning Frequency	15.734 KHz x 59.94 Hz (H x V)	
Total Pixels	Effective Pixels	976 x 494 (H x V)
Synchronization	Internal	
Lens	C/CS Mount	
Lens Type	Manual / DC Iris Lens	
S/N	More than 50 dB (AGC Off)	
Gamma	r = 0.45	
Min. Illumination	0.05 Lux (Color) / 0.003 Lux (B/W) (30 IRE@F1.2) (IR LED Off)	
Shutter Speed	1/60 ~ 1/100,000 sec	
Day & Night	True Day & Night with ICR Mechanism	
IR LED	Distance	N/A
Day & Night Function	Auto, Color, B/W	
IP Rating	N/A	
Video Output Level	1.0 Vp-p Composite (75 Ω)	
On-Screen Display (OSD)	Built-in	
BLC	Off, BLC, HLC	
DNR	2D DNR	
ATR	On / Off (Level Adjustable)	
White Balance	ATW, Push, User1, User2, Anti CR, Manual, Push-lock	
Privacy Masking	4 Zones	
Mirror	On / Off	
Motion Detection	4 Zones	
WDR	N/A	
Digital Zoom Ratio	N/A	
Digital Slow Shutter	N/A	
Other Function	Brightness, Contrast, Sharpness, Hue, Gain	
Language Option	English, Japanese, German, French, Russian, Portuguese, Spanish, Chinese	
Operating Temperature	14 °F ~ 122 °F (-10 °C ~ 50 °C)	
Storage Temperature	-4 °F ~ 140 °F (-20 °C ~ 60 °C)	
Humidity	Less than 80% RH	
Power Supply	DC Type : DC 12 V (±10%), Max.130 mA Dual Type : DC 12 V (±10%), Max.130 mA / AC 24 V (±10%), Max. 2.9 W	
External Control	RS-485	
Dimension	Weight	2.3 x 2.3 x 2.7 inch (58 x 58 x 69 mm)   0.4 lbs (200 g)