


FCS-5068 GEMINI Varifocal IP Network Camera, 5-Megapixel, IR LEDs, two-way audio, 802.3af PoE, Indoor/Outdoor

Product Images



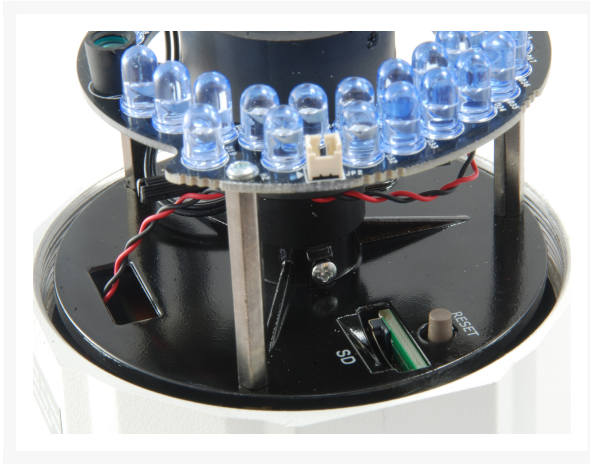

Short Description

- 5-Megapixel high-definition resolution
- Video compression: H.264, MJPEG
- Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
- Built-in infrared LEDs for night viewing up to 30m
- Digital input/output (1DI/1DO) for sensor and alarm
- Power support: PoE (IEEE 802.3af)
- Weatherproof IP66-rated housing
- 2.8-12 mm adjustable Vari-focal length for wide angle surveillance
 - 5-Megapixel high-definition resolution
 - Video compression: H.264, MJPEG
 - Features WDR (Wide Dynamic Range) to enhance visibility under extremely bright or dark environments
 - Built-in infrared LEDs for night viewing up to 30m
 - Digital input/output (1DI/1DO) for sensor and alarm
 - Power support: PoE (IEEE 802.3af)
 - Weatherproof IP66-rated housing
 - 2.8-12 mm adjustable Vari-focal length for wide angle surveillance

Description

The LevelOne FCS-5068 is a fixed-position outdoor camera offering an ultra-reliable, cost-effective solution for outdoor IP surveillance networks, and is rated at IP66 to operate within rain, extreme heat, snow, dust and humid conditions. Offering clear, sharp imagery with 5-Megapixel resolution and the versatility of 802.3af standard PoE to transfer power and data via a single Cat.5 cable, the LevelOne FCS-5068 should be an essential part of any security deployment that requires smart, reliable outdoor cameras.

Additional Information

Fast Ethernet RJ45	RJ45 10M/100M Ethernet port
Terminal block	1 x alarm I/O 1 x audio I/O
Color	White
EAN	4015867199220
Model Number	FCS-5068
Features	5-Megapixel high resolution PoE: PoE (802.3af) Security: Password Protection, IP Address Filtering, Anonymous Access, Watermark Video: Motion Detection, Saturation, Brightness, Contrast adjustable by client software or web browser, Mirror, BLC, ROI, Dual Stream, Anti-Flicker, Privacy Mask, Intrusion Detection, Line Crossing detection Audio: G.711/G.722.1/G.726/MP2L2 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
2-way audio	Yes
IR LED for night vision	Yes
Max. Resolution	5 Megapixels
Resistance	Weatherproof
IP Camera series	GEMINI
Camera Type	Bullet
Zoom type	Optical
PoE Supported	Yes
Approval and Compliance	EMI/EMS: CE,FCC,UL Environmental Test: IP 66 Others: ONVIF (PROFILE S, PROFILE G), PSIA, CGI, ISAPI RoHS Manufactured in ISO-9001 and ISO-14001 certified factory
Operating humidity	0% RH ~ 95% RH
Operating temperature	-30°C ~ 60°C
Supported browsers	Internet Explorer 9 or above
Package Contents	FCS-5068 Screw Kit Resource CD (User Manual, Utility, 64-CH Monitoring Software)

Dimensions (W x D x H)	95 x 105 x 258.6 mm
Product weight (kg)	1.2
Angle of view (°)	106°~35°
Audio format	G.711/G.722.1/G.726/MP2L2 64Kbps(G.711) / 16Kbps(G.722.1) / 16Kbps(G.726) / 32-128Kbps(MP2L2)
Digital zoom	8X
Image sensor	1/3" Progressive Scan CMOS
Indicators	Power
IR cut filter	Yes
IR range	Max. 30 meter
Lens	Vari-focus 2.8-12mm @ F1.4, CS-Mount lens socket,Auto Iris
Minimum illumination (lux)	0.01Lux @ (F1.2, AGC ON), 0 Lux with IR 0.014Lux @ (F1.4, AGC ON), 0 Lux with IR
Mount	Ceiling mount, Wall mount
Optical zoom	4.3 X Vari-focus 2.8-12mm
Power supply	DC12V ± 10%, PoE (802.3af)
Resolution	50Hz: 20fps (2560×1920), 25fps (2048×1536), 25fps(1920×1080), 25fps(1280×720) 60Hz: 20fps (2560×1920), 30fps (2048×1536), 30fps(1920×1080), 30fps(1280×720)
Shutter time	1/3 s to 1/10,000 s
Standards	IPv4,TCP/IP, UDP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour,IIEEE802.1x
Storage capacity	Built-in Micro SD/SDHC/SDXC slot, up to 128GB
Video format	MPEG4
Weatherproof rating	IP 66

