


POR-0222 2-Port Gigabit PoE-Plus Repeater, Cascadable, LevelOne

Product Images

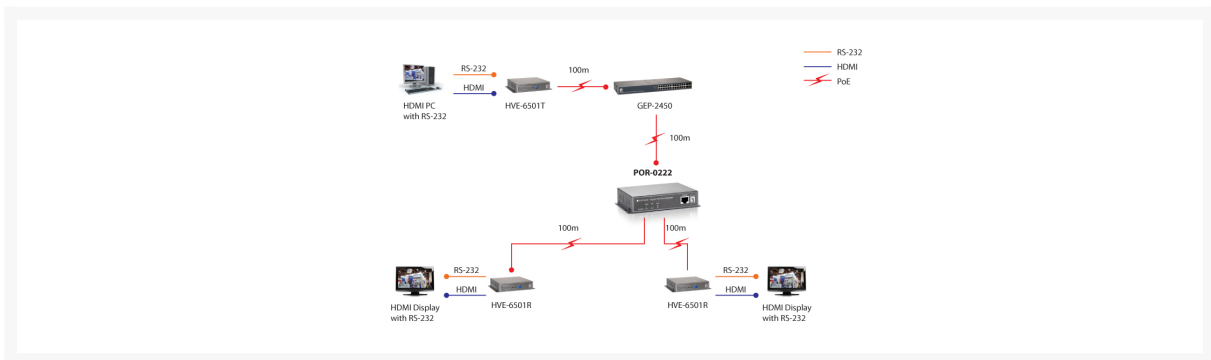

Short Description

- High Power Midspan PoE compliant to simplify deployment and installation
- Simple Plug and Play installation, no additional power supply required

- Forwards 802.3af/802.3at/High-Power PoE to remote device
- Extends Gigabit PoE connection for another 100 meters
- Built-in 2 PoE ports for PoE devices
- No additional power supply required
- Simple Plug and Play installation

Description

Extend the reach of your Gigabit PoE-Plus devices For system integrators looking for a professional solution to help extend their Gigabit PoE (802.3af/at) network, POR-0222 is the perfect accessory to increase your network performance. As a 2-port repeater, it's now easier to add more devices to the network for greater deployment flexibility. Normal cable runs only reach 100 meters, but with POR-0222 installers can extend the PoE network performance up to 200 meters. Furthermore, you can triple your range or even more by daisy-chaining* multiple PoE repeaters.* Maximum distance depends on the required Wattage of the PD. Simple yet durable, no software required As a Gigabit PoE-Plus Repeater, POR-0222 receives all power from the Power Sending Equipment (PSE), such as a Gigabit PoE-Plus switch. This means that POR-0222 uses no external power supply, making it the most flexible option for system integrators looking for an easy, affordable solution to increase the distance to the attached devices on a network. POR-0222 has 3 RJ-45 ports for easy deployment, 1 "IN" port that accepts the power and data for the first 100 meters, and 2 "OUT" ports that boosts and extends the power and data an additional 100 meters. With a durable metal housing, POR-0222 fits into any tight deployments. Applications POR-0222 is a long-ranged solution for deploying PoE IP Digital Signage and any Gigabit PoE PD powered by 802.3at Gigabit PSE.

Additional Information

802.3af/at PoE	2
Color	Grey
EAN	4015867185629
Model Number	POR-0222
Data rate	Gigabit Ethernet
Cascadable	Yes
Operating humidity	5% RH ~ 95% RH
Operating temperature	0°C ~ 50°C
Package Contents	POR-0222 Quick Installation Guide
Dimensions (W x D x H)	130 x 90 x 28 mm
Product weight (kg)	0,4
Indicators	Power, PoE In, PoE Out
Mount	Wall mount
Standards	IEEE 802.3 10Base-T, Ethernet IEEE 802.3u 100Base-TX, Fast Ethernet IEEE802.3ab 1000Base-T, Gigabit Ethernet IEEE 802.3x Ethernet Flow Control