



VERSION INFORMATION (Vender)			
Rev.	Rev. Date	Modified By	Brief Description
v1	20220816	FW	update to ANSI/TIA 568.2-D
v2	20220818	FW	Add other printing

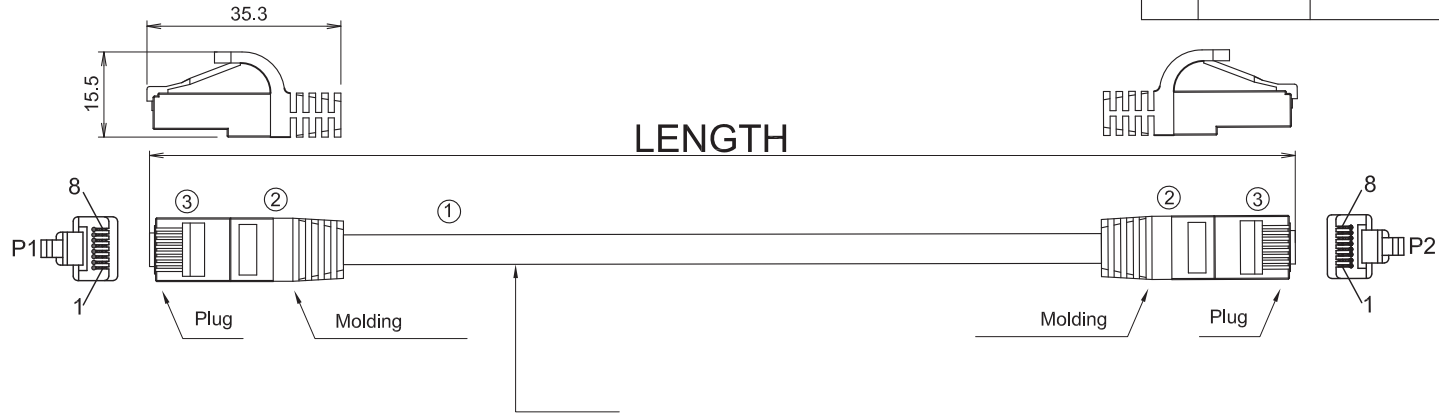

SZ MARKING:CAT.5E UTP 350Mhz ETL Verified ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E164469-B2 RoHS COMPLIANCE
 VN MARKING:CAT.5E UTP 350Mhz ETL Verified ANSI/TIA-568.2-D & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E522879 RoHS COMPLIANCE

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown



NOTE:
 1.ELECTRICAL TEST:
 <1> 100% OPEN SHORT & MISS WIRE TEST.
 <2> FLUKE CHANNEL LEVEL 1DB↑
 <3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
 10<L≤20M 15ΩMAX
 20<L≤40M 25ΩMAX

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG (7/0.196±0.015mmBC)*4P
INSULATION	Thickness: MIN at any point:0.15mm MAX AVG:0.25mm Diameter: 0.98±0.06mm
Jacket PVC	Thickness: MIN at any point:0.42mm MAX AVG:0.48mm Diameter: 5.6±0.20mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	RJ45 PLUG	RJ45 PLUG: 8P8C 50U" GOLD PLATED TRANSPARENT PLUG;		
②	MOLDED	PVC MOLDED BOOT .		
①	CABLE	CAT5E UTP[24AWG(7/0.196BC±0.015)]*4 OD:Ø5.6±0.2MM PVC JACKET.		

VENDOR CODE : V16988	DESCRIPTION : Monoprice FLEXboot Cat5e Ethernet Patch Cable -Snagless RJ45, Stranded, 350MHz, UTP, Pure Bare Copper Wire, 24AWG
APPROVED BY PM & DATE :	PID # :
PM PRINT NAME :	DATE : 2022/08/16 UNIT : MM SHEET: 1 OF 6 FILE NAME: PID_PRODUCT