


orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

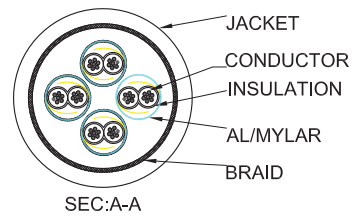


NOTE:  
 1.ELECTRICAL TEST:  
 <1> 100% OPEN SHORT & MISS WIRE TEST.  
 <2> PASS FLUKE DSX 8000 ISO PATCH CORD TEST(Randomly test, test rate: 5%)  
 <3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX  
 10<L≤20M 15ΩMAX  
 20<L≤40M 25ΩMAX

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	30AWG (7/0.10±0.008mmBC)*4P	
INSULATION	Diameter=0.75±0.05mm	
Jacket	PVC	Thickness: Max AVG:0.60 Diameter=4.5±0.15mm

NO.	PART NAME	SPECIFICATION DESCRIPTION
③	RJ45 PLUG	RJ45 PLUG: 8P8C 50U' GOLD PLATED TWO-PIECE PLUG; SHIELDED NICKEL PLATING.
②	MOLDED	PVC ASSEMBLE BOOT.
①	CABLE	CAT6A S/FTP[30AWG(7/0.10BC±0.008)+AL/MYLAY]*4+BRAID(16*4/0.08±0.008TC) OD:Ø4.5±0.15MM CM PVC JACKET.



DESCRIPTION : SlimRun S/FTP Cat6A 30AWG patch cable Component Level			
DATE :	UNIT :		
2021/02/02	MM		