




FLUKE® PV350

Pressure/Vacuum Transducer Module Quick Reference Card


OPERATION

1. Check battery voltage
2. Select units
3. Select settings
4. Zero module
5. Apply pressure

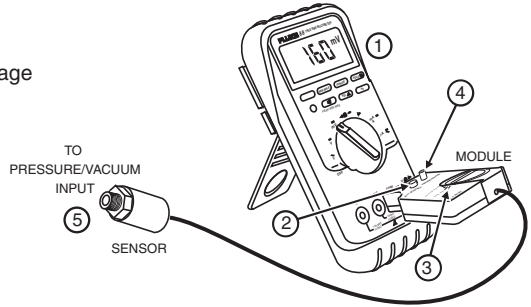


BATTERY TEST

1. DMM and module off
2. DMM to mV range
3. If display less than 100 mV, replace battery



BATTERY REPLACEMENT

1. Remove from DMM and inputs. Remove screw
2. Replace battery and reassemble. Do not overtighten screws.





Temperature Refrigerant - Code

F	12-F	22-V	502-R	F	12-F	22-V	502-R
-60	19.0	2.0	7.2	26	25.4	49.9	60.1
-55	17.3	9.2	3.9	27	26.1	51.2	61.5
-50	15.4	6.2	0.2	28	26.9	52.4	62.8
-45	13.3	2.7	1.9	29	27.7	53.6	64.2
-40	11.0	0.5	4.1	30	28.5	54.9	65.6
-35	8.4	2.6	6.5	31	29.3	56.2	67.0
-30	5.5	4.9	9.2	32	30.1	57.5	68.4
-25	2.3	7.4	12.1	33	30.9	58.8	69.9
-20	0.6	10.1	15.3	34	31.7	60.1	71.3
-18	1.3	11.3	16.7	35	32.6	61.5	72.8
-16	2.1	12.5	18.1	36	33.4	62.8	74.3
-14	2.8	13.8	19.5	37	34.3	64.2	75.9
-12	3.7	15.1	21.0	38	35.2	65.6	77.4
-10	4.5	16.5	22.6	39	36.1	67.1	79.0
-8	5.4	17.9	24.2	40	37.0	68.5	80.5
-6	6.3	19.3	25.8	41	37.9	70.0	82.1
-4	7.2	20.8	27.5	42	38.8	71.5	83.8
-2	8.2	22.4	29.3	43	39.8	73.0	85.4
0	9.2	24.0	31.1	44	40.7	74.5	87.0
1	9.7	24.8	32.0	45	41.7	76.0	88.7
2	10.2	25.6	32.9	46	42.7	77.6	90.4
3	10.7	26.5	33.9	47	43.6	79.2	92.1
4	11.2	27.3	34.9	48	44.7	80.8	93.9
5	11.8	28.2	35.9	49	45.7	82.4	95.6
6	12.3	29.1	36.9	50	46.7	84.0	97.4
7	12.9	30.0	37.9	55	52.0	92.6	106.6
8	13.5	30.9	38.9	60	57.7	101.6	116.4
9	14.1	31.8	39.9	65	63.8	111.2	126.7
10	14.6	32.8	41.0	70	70.2	121.4	137.6
11	15.2	33.7	42.1	75	77.0	132.2	149.1
12	15.8	34.7	43.1	80	84.2	143.6	161.2
13	16.5	35.7	44.3	85	91.8	155.7	174.0
14	17.1	36.7	45.4	90	99.8	168.4	187.4
15	17.7	37.7	46.5	95	108.3	181.8	201.4
16	18.4	38.7	47.7	100	117.2	195.9	216.2
17	19.0	39.8	48.9	105	126.6	210.8	231.7
18	19.7	40.9	50.0	110	136.4	226.4	247.9
19	20.4	41.9	51.2	115	146.8	242.7	264.9
20	21.0	43.0	52.5	120	157.7	259.9	282.7
21	21.7	44.1	53.7	125	169.1	277.9	310.4
22	22.4	45.3	54.9	130	181.0	296.8	320.8
23	23.2	46.4	56.2	135	193.5	316.6	341.8
24	23.9	47.6	57.5	140	206.6	337.3	362.6
25	24.6	48.8	58.8	145	220.3	358.9	385.0