

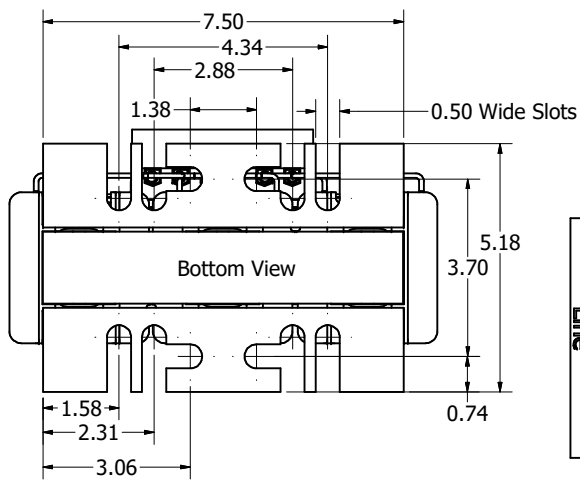
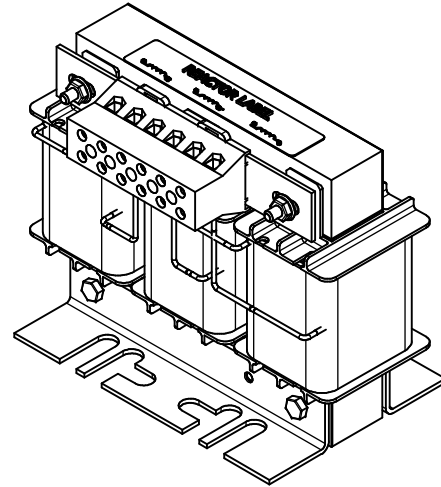
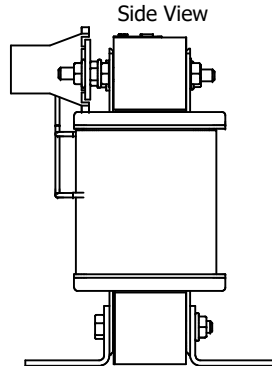


Wire Range: 1- 4 AWG. Torque : 35 IN-LBS (3.95 Nm)  
 (Customer Connections) Markings On Terminal Block For Reference Only. 6- 14 AWG. Torque : 30 IN-LBS (3.39 Nm)  
 16- 20 AWG. Torque : 25 IN-LBS (2.28 Nm)  
 22 AWG. Torque : 20 IN-LBS (2.26 Nm)

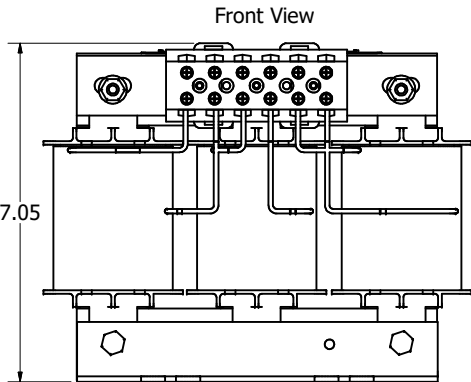

480 Rated Voltage, 600 Max Voltage, High Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)
KDRF4H	40	52	60	581	169	25
KDRF1H	50	65	72	465	191	25

480 Rated Voltage, 600 Max Voltage, Low Z, Impedance.

Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)
KDRF2L	50	65	65	295	114	25
KDRF4L	60	77	77	227	169	25

**TCS** (800) 824-8282 [transcoll.com](http://transcoll.com)

KDRFL Drive Reactor  
 KDRM Motor Amps  
 30V, 480/240V -V Inrated, 600V Max, -A Max, Ref 18  
 40C Amb Max, 250C Max  
 Manual #30895

UL Listed CE

DATE CODE: A1 72 B1 72 C1 72

Notes:

1. UL file number: cULus Listed File E116124.
2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. Material(s) Shall be RoHS Compliant
5. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)	
E	6688 F1H 70 TO 72 AMPS	6/18/24	DSW	DECIMAL	
D	6233, Add Double nut to brace	4/7/2023	DSW	.XX ± .25	
C	4851, KDRF1H Was 85A Max.	1/27/2022	DSW	.XXX ± .10	
B	For KDRF2H see drawing 107988	1/31/19	DSW	FRACTIONAL	
A	Combined Drawings	1/22/18	DSW	± 1/32	
NO	REVISION	DATE	BY	ANGULAR	± 1°