


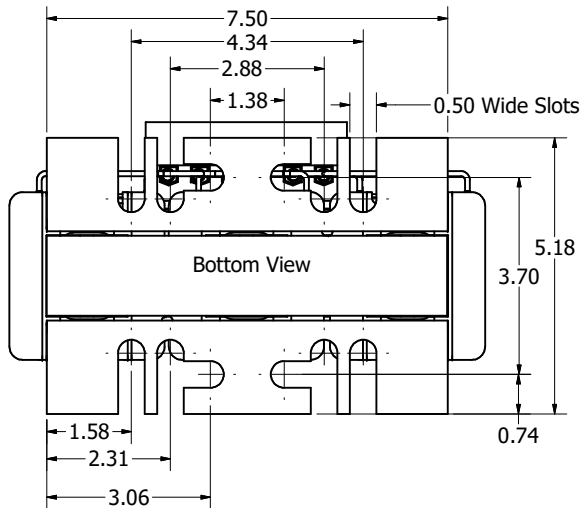
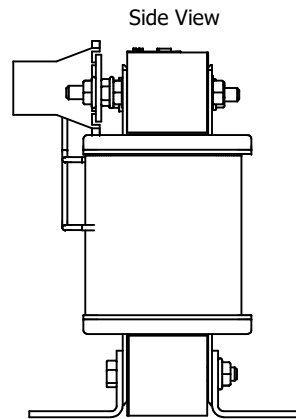


(Customer Connections)
Markings On Terminal Block
For Reference Only.

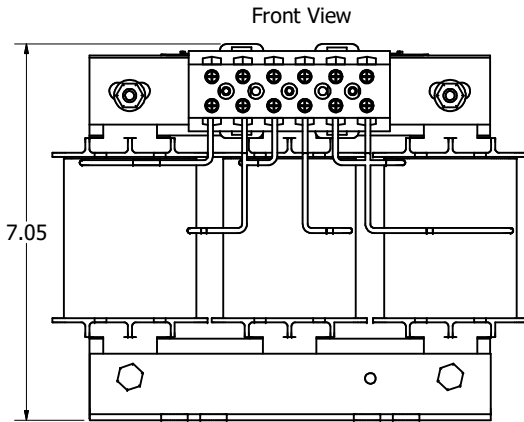

575 Rated Voltage, 600 Max Voltage, Output						
Part Number	Horsepower (HP)	Motor Amps (A)	Maximum Amps (A)	Inductance (uH)	Losses (W)	Weight (LBS)
KDRF31P	60	62	80	144	105	25
KDRF32P	75	77	80	143	105	25

Wire Range: 1- 4 AWG. Torque : 35 IN-LBS (3.95 Nm)
 6- 14 AWG. Torque : 30 IN-LBS (3.39 Nm)
 16- 20 AWG. Torque : 25 IN-LBS (2.28 Nm)
 22 AWG. Torque : 20 IN-LBS (2.26 Nm)

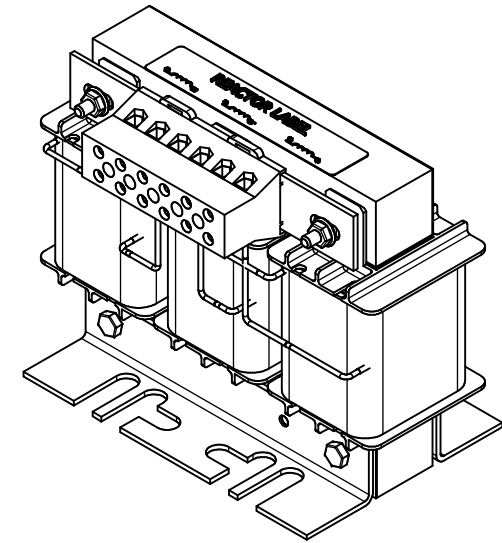

TCL (800) 824-8282 trenchcoil.com

KDRF Drive Reactor
 575V, 600V Max, -A Max, Ref 18
 3PH, 50/60Hz, -V Phase, 600V Max, -A Max, Ref 18
 40C Amp Max, 120C Max
 Manual P30895

UL LISTED FILE E116124

DATE CODE: A1 75 B1 75 C1 75

Notes:

1. UL file number: cULus Listed File E116124.
2. KDR Drive Reactors Comply With The Thermal and Altitude Standards Set Forth by NEMA ST20-1992.
3. KDR IOM Manual Part Number 30895
4. NEC Current For 208/240 Volts, Horsepower Based On 208 Volts.
5. Material(s) Shall be RoHS Compliant
6. Customer Is Responsible For Installation To Meet All National And Local Electrical Codes.

THE INFORMATION AND DESIGNS CONTAINED IN THIS DRAWING ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES. NEITHER THIS DESIGN NOR ANY INFORMATION CONTAINED IN THIS DRAWING MAY BE REPRODUCED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF ALLIED MOTION TECHNOLOGIES INC. AND ITS SUBSIDIARIES.				TOLERANCES (EXCEPT AS NOTED)			
				DECIMAL			
				.XX ± .25			
				.XXX ± .10			
				FRACTIONAL			
				± 1/32			
				ANGULAR			
				± 1°			
A	6688-107515-1 to 107515-5	6/7/2024	DSW				
NO	REVISION	DATE	BY				