

This high resolution 2/3" C-Mount lens with motorized iris is compact and robust and therefore ideal for demanding imaging applications even in harsh environment. With the special broadband AR coating it can be used in the visible 400 to 700 nm and in the NIR 700 to 1000 nm range.

Key features

- Compact and robust design
- Motorized iris (P-iris)
- 11 mm image circle
- 400-1000nm AR coating


Applications

- 2D/3D metrology
- Robotics vision
- Industrial automation
- Traffic and surveillance

Technical specifications	
Type [motorized iris]	C-MI
ID [motorized iris]	1061449
Interface	C-Mount
Focal length [mm]	8
F/# range	F/1.4 F/11
Numerical aperture [object image]	- 0.34
Max. sensor size [mm]	11
Max. angle of view [°]	69
Rec. magnification range	-0.1 0
Rec. working distance range [mm]	70 ∞
Min. working distance without extension tubes [mm]	0
Filter thread [mm]	M30.5 x 0.5
Storage temperature [°C]	-25 +70
Net. weight [standard] [g]	134
Additional info	-
f'eff [mm]	8.24
SF [mm]	11.70
S'F' [mm]	12.56
HH' [mm]	20.86
В'Р	4.80
SEP [mm]	13.42
S'AP [mm]	-26.96
Σd [mm]	36.48




MTF charts						
Spectrum name			V	IS		
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights [%]	8	16	23	22	19	13

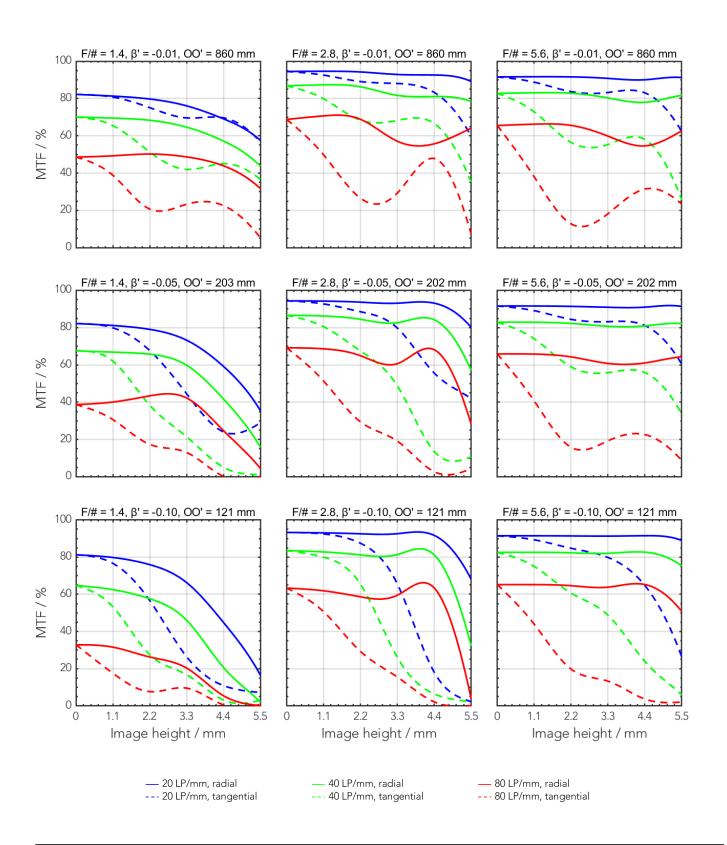



Rel. illumination vs. image height

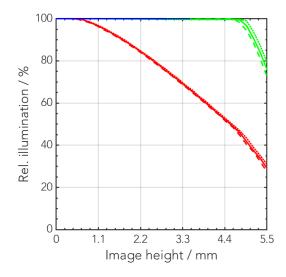

```
- F/# = 1.4, \beta = -0.01

- F/# = 2.8, \beta = -0.01

- F/# = 5.6, \beta = -0.01

- F/# = 1.4, \beta = -0.05


- F/# = 2.8, \beta = -0.05

- F/# = 5.6, \beta = -0.10

...... F/# = 2.8, \beta = -0.10


..... F/# = 5.6, \beta = -0.10
```

Distortion vs. image height

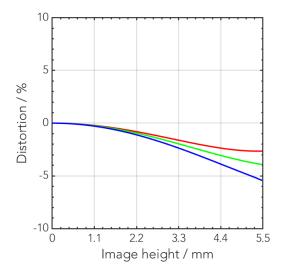


 $\beta' = -0.01$ $\beta' = -0.05$ $\beta' = -0.10$

Transmittance vs. wavelength

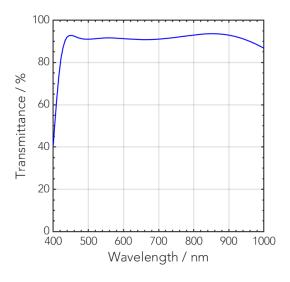



Technical drawings

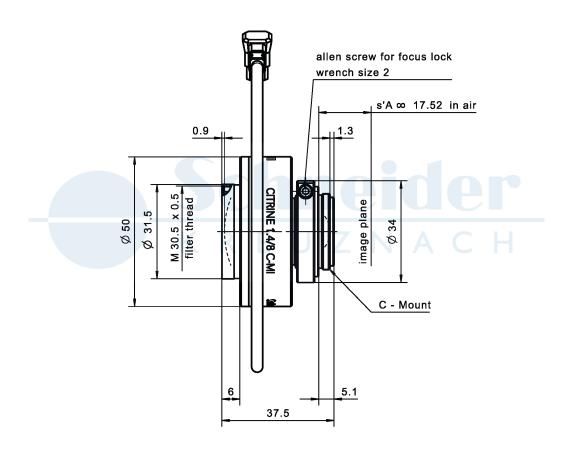

1

4



low

high

Additional electrical information						
Motor type			2 phase, bipolar stepper motor			
Coil resistance			21 Ohn			
Rated current			≤ 143 mA/Phase			
Rated voltage					3 V	
Coil inductivity					1.8 mH/phase @ 1 kHz	
Max. step frequency					400 Hz	
Cable type			Lemo Santoprene 2 x 2 x 0.14 mm² black			
Cable length			300 mm			
Electrical connector			JEITA E4-191J-100			
Operating temperature	9				0°C to +50°C	
Storage temperature			-25°C to +70°C			
Mean time between failures (MTBF)					> 100.000 cycles	
Sequenze of excitation						
pins steps	1	2		3	4	
3	high	hi	igh	low	low	
2	low	lo	 DW	high	high	

Iris movement	< open iris /> close iris

low

high

Motor steps to f-stop resolution						
Motor steps	10	15	20	25	30	35
Iris-diameter	7.9	5.7	4.2	3	2.2	1.6
F-stop	1.7	2.3	3.2	4.5	6.1	8.4

high

low

high

low

F-stop to motor steps resolution							
F-stop	1.4	2	2.8	4	5.6	8	11
Iris-diameter	9.6	6.7	4.8	3.4	2.4	1.7	1.2
Motor steps	6.9	12.5	17.8	23.3	28.6	34.2	39.2



Accessories	Mount	Eff. length	ID
Adapter	CS-Mount	5 mm	25081
	C-Mount / M42 x 1	5.5 mm	1075817
Extension tube	C-Mount / C-Mount	5 mm	39316
	C-Mount / C-Mount	8 mm	39315
	C-Mount / C-Mount	10 mm	39312



Annotation	
Focal length	Nominal focal length
F/# range	Image space F-number range for infinity focus position
Numerical aperture	Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)
Max. sensor size	Image circle diameter
Max. angle of view	Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range
Max. mechanical focus travel	Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification)
Net weight	weight of unpacked lens without lens cap
f'eff	Effective focal length
SF	Distance between vertex of first lens surface and object space focal point
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)
HH'	Distance between principal planes
ß'P	Pupil magnification (= exit pupil diameter / entrance pupil diameter)
SEP	Distance between vertex of first lens surface and entrance pupil
S'AP	Distance between vertex of last lens surface and exit pupil
Σd	Distance between vertices of first and last lens surface
s'A	Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)
β'	Magnification (= image size / object size), negative value because image is inverted
00'	Distance between object and image

Unless otherwise stated all dimensions in this data sheet are in mm.