

This high resolution 2/3" C-Mount lens with motorized iris is compact and robust and therefore ideal for demanding imaging applications even in harsh environment. With the special broadband AR coating it can be used in the visible 400 to 700 nm and in the NIR 700 to 1000 nm range.

### Key features

- Compact and robust design
- Motorized iris (P-iris)
- 11 mm image circle
- 400-1000nm AR coating


### **Applications**

- 2D/3D metrology
- Robotics vision
- Industrial automation
- Traffic and surveillance

Technical specifications	
Type [motorized iris]	C-MI
ID [motorized iris]	1061450
Interface	C-Mount
Focal length [mm]	12
F/# range	F/1.4 F/11
Numerical aperture [object   image]	-   0.32
Max. sensor size [mm]	11
Max. angle of view [°]	48
Rec. magnification range	-0.1 0
Rec. working distance range [mm]	105 ∞
Min. working distance without extension tubes [mm]	6
Filter thread [mm]	M30.5 x 0.5
Storage temperature [°C]	-25 +70
Net. weight [standard] [g]	143
Additional info	-
f'eff [mm]	12.65
SF [mm]	20.13
S'F' [mm]	12.69
HH' [mm]	13.51
В'Р	3.73
SEP [mm]	23.52
S'AP [mm]	-34.49
Σd [mm]	46.25




MTF charts						
Spectrum name			V	IS		
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights [%]	8	16	23	22	19	13

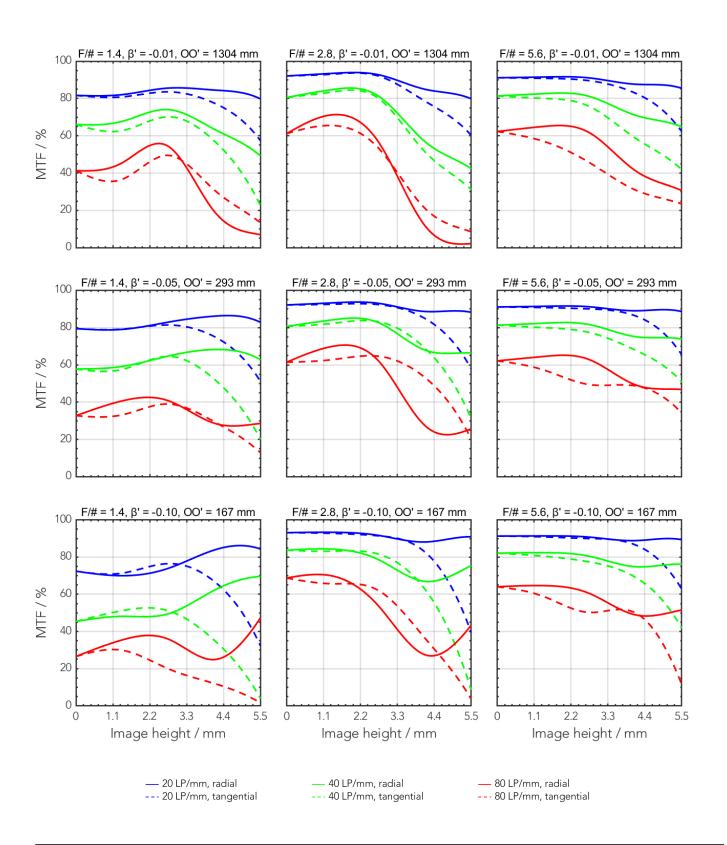



### Rel. illumination vs. image height

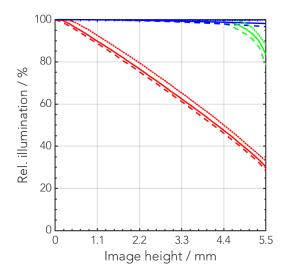

```
- F/# = 1.4, \beta = -0.01

- F/# = 2.8, \beta = -0.01

- F/# = 5.6, \beta = -0.01

- F/# = 1.4, \beta = -0.05

- F/# = 2.8, \beta = -0.05


- F/# = 5.6, \beta = -0.05

- F/# = 1.4, \beta = -0.10

- F/# = 2.8, \beta = -0.10


- F/# = 5.6, \beta = -0.10
```

## Distortion vs. image height

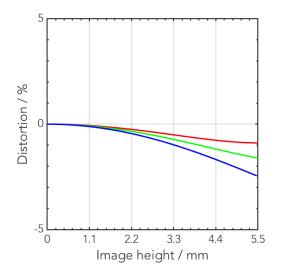


 $\beta' = -0.01$   $\beta' = -0.05$   $\beta' = -0.10$ 

## Transmittance vs. wavelength

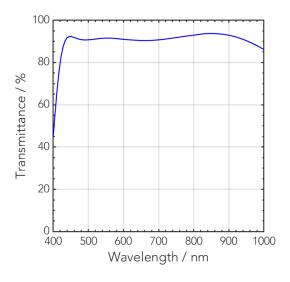



## Technical drawings

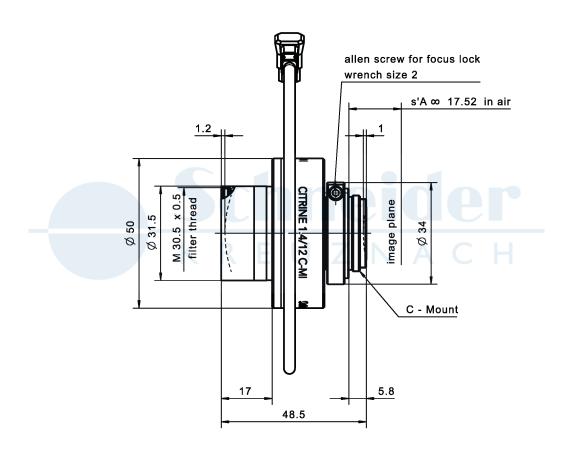



Additional electrica	l information					
Motor type			2 phase, bipolar stepper moto			
Coil resistance				21 Ohm		
Rated current				≤ 143 mA/Phase		
Rated voltage				3 V		
Coil inductivity				1.8 mH/phase @ 1 kHz		
Max. step frequency				400 Hz		
Cable type			Lemo Santoprene	e 2 x 2 x 0.14 mm² black		
Cable length			300 mm			
Electrical connector			JEITA E4-191J-100			
Operating temperature			0°C to +50°C			
Storage temperature			-25°C to +70°C			
Mean time between fai	ilures (MTBF)			> 100.000 cycles		
Sequenze of excita-	tion					
pins steps	1	2	3	4		
3	high	high	low	low		
2	low	low	high	high		
1	low	high	high	low		
4	high	low low h				

Iris movement	< open iris /> close iris

Motor steps to f-stop resolution							
Motor steps	10	15	20	25	30	35	40
Iris-diameter	8	5.8	4.1	3	2.2	1.6	1.1
F-stop	1.4	2	2.7	3.7	5.1	7.1	9.8

F-stop to motor steps resolution							
F-stop	1.4	2	2.8	4	5.6	8	11
Iris-diameter	8.1	5.7	4	2.8	2	1.4	1
Motor steps	9.7	15.3	20.5	26.1	31.4	36.9	41.9



Accessories	Mount	Eff. length	ID
Adapter	CS-Mount	5 mm	25081
	C-Mount / M42 x 1	5.5 mm	1075817
Extension tube	C-Mount / C-Mount	5 mm	39316
	C-Mount / C-Mount	8 mm	39315
	C-Mount / C-Mount	10 mm	39312



Annotation				
Focal length	Nominal focal length			
 F/# range	Image space F-number range for infinity focus position			
Numerical aperture	Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)			
Max. sensor size	Image circle diameter			
Max. angle of view	Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)			
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach			
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range			
Max. mechanical focus travel	Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification)			
Net weight	weight of unpacked lens without lens cap			
f'eff	Effective focal length			
SF	Distance between vertex of first lens surface and object space focal point			
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)			
HH'	Distance between principal planes			
 β'P	Pupil magnification (= exit pupil diameter / entrance pupil diameter)			
SEP	Distance between vertex of first lens surface and entrance pupil			
S'AP	Distance between vertex of last lens surface and exit pupil			
Σ d	Distance between vertices of first and last lens surface			
s'A	Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)			
ß'	Magnification (= image size / object size), negative value because image is inverted			
00'	Distance between object and image			

Unless otherwise stated all dimensions in this data sheet are in mm.