

Optimized for working distances from 1m to infinity this compact and robust 1.2" C-Mount lens is the perfect choice for demanding long distance applications even in harsh environment. With the special broadband AR coating it can be used in the visible 400 to 700 nm and in the NIR 700 to 1000 nm range.

Key features

- For sensors up to 1.2"
- Motorized iris (P-iris)
- Optimized for WD 1m to infinity
- Low chief ray angle


Applications

- Traffic
- Surveillance
- Long distance imaging

Technical specifications	
Type [motorized iris]	C-MI
ID [motorized iris]	1088585
Interface	C-Mount
Focal length [mm]	25
F/# range	F/2 F/16
Numerical aperture [object image]	- 0.25
Max. sensor size [mm]	19.3
Max. angle of view [°]	38
Rec. magnification range	-0.1 0
Rec. working distance range [mm]	237 ∞
Min. working distance without extension tubes [mm]	77
Filter thread [mm]	M30.5 × 0.5
Storage temperature [°C]	-25 +70
Net. weight [standard] [g]	146
Additional info	-
f'eff [mm]	24.22
SF [mm]	-4.26
S'F' [mm]	11.88
HH' [mm]	-2.15
ß'P	1.27
SEP [mm]	14.78
S'AP [mm]	-18.92
Σd [mm]	30.14




MTF charts						
Spectrum name			V	IS		
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights [%]	8	16	23	22	19	13

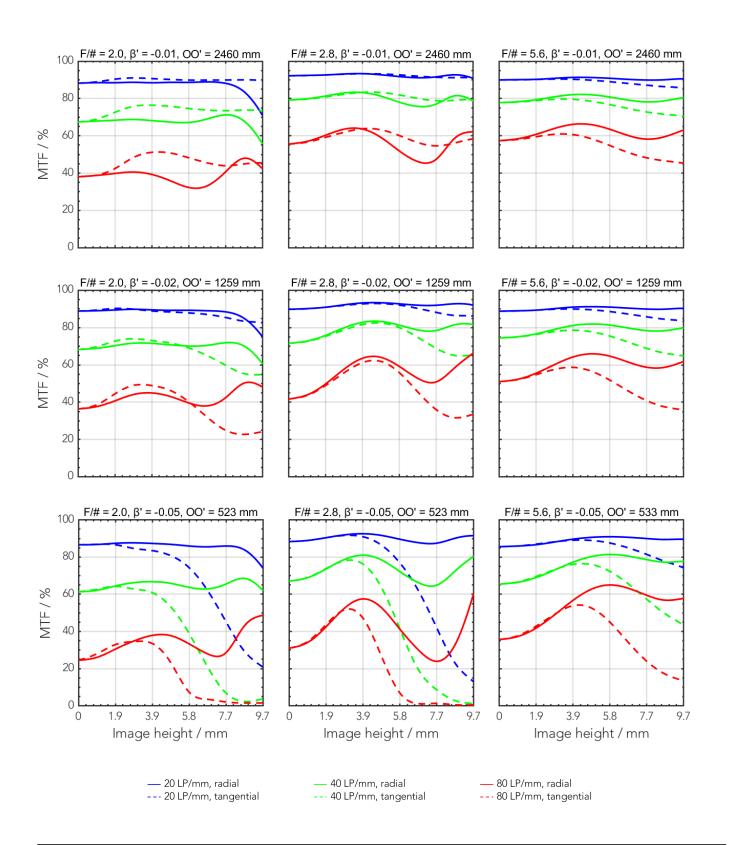



Rel. illumination vs. image height

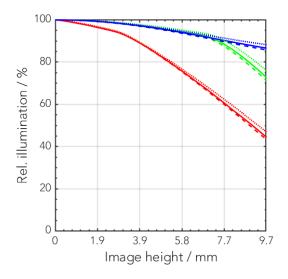

```
-- F/# = 2.0, \beta = -0.01

-- F/# = 2.8, \beta = -0.01

-- F/# = 5.6, \beta = -0.02

-- F/# = 2.0, \beta = -0.02


-- F/# = 2.8, \beta = -0.02

-- F/# = 5.6, \beta = -0.05

--- F/# = 2.8, \beta = -0.05


--- F/# = 5.6, \beta = -0.05
```

Distortion vs. image height

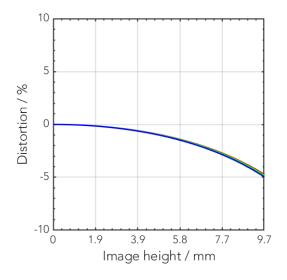


 $\beta' = -0.01$ $\beta' = -0.02$ $\beta' = -0.05$

Transmittance vs. wavelength

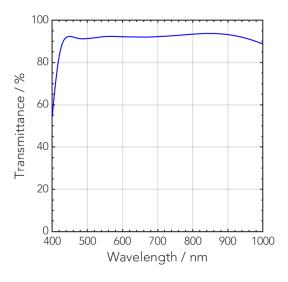



Technical drawings

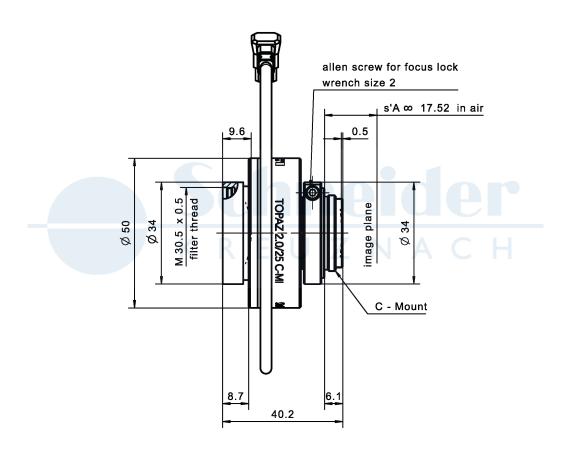

4



high

Additional electrica	l information					
Motor type			2 phase, bipolar stepper motor			
Coil resistance			21 Ohm			
Rated current			≤ 143 mA/Phase			
Rated voltage					3 V	
Coil inductivity					1.8 mH/phase @ 1 kHz	
Max. step frequency					400 Hz	
Cable type			Lemo Santoprene 2 x 2 x 0.14 mm² black			
Cable length			300 mm			
Electrical connector			JEITA E4-191J-100			
Operating temperature			0°C to +50°C			
Storage temperature			-25°C to +70°C			
Mean time between fai	lures (MTBF)		> 100.000 cycles			
Sequenze of excitat	tion					
pins steps	1	2		3	4	
3	high	high		low	low	
2	low	low		high	high	
1	low	high		high	low	
				 		

Iris movement	< open iris /> close iris

high

Motor steps to f-stop resolution							
Motor steps	10	15	20	25	30	35	40
Iris-diameter	8	5.8	4.1	3	2.2	1.6	1.2
F-stop	2	2.8	3.9	5.3	7.3	10.1	13.9

low

low

F-stop to motor steps resolution							
F-stop	2	2.8	4	5.6	8	11	16
Iris-diameter	8.1	5.8	4	2.9	2	1.5	1
Motor steps	9.7	15	20.5	25.8	31.4	36.3	42.2



Accessories	Mount	Eff. length	ID
Adapter	CS-Mount	5 mm	25081
	C-Mount / M42x1	5.5 mm	1075817
Extension tube	C-Mount / C-Mount	5 mm	39316
	C-Mount / C-Mount	8 mm	39315
	C-Mount / C-Mount	10 mm	39312



Annotation	
Focal length	Nominal focal length
 F/# range	Image space F-number range for infinity focus position
Numerical aperture	Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)
Max. sensor size	Image circle diameter
Max. angle of view	Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range
Max. mechanical focus travel	Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification)
Net weight	weight of unpacked lens without lens cap
f'eff	Effective focal length
SF	Distance between vertex of first lens surface and object space focal point
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)
HH'	Distance between principal planes
 β'P	Pupil magnification (= exit pupil diameter / entrance pupil diameter)
SEP	Distance between vertex of first lens surface and entrance pupil
S'AP	Distance between vertex of last lens surface and exit pupil
Σ d	Distance between vertices of first and last lens surface
s'A	Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)
ß'	Magnification (= image size / object size), negative value because image is inverted
00'	Distance between object and image

Unless otherwise stated all dimensions in this data sheet are in mm.