
Continuous level sensor (guided wave radar)

LR0000--BR34A1DKG/US



Please see the technical note under "Downloads"

For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.

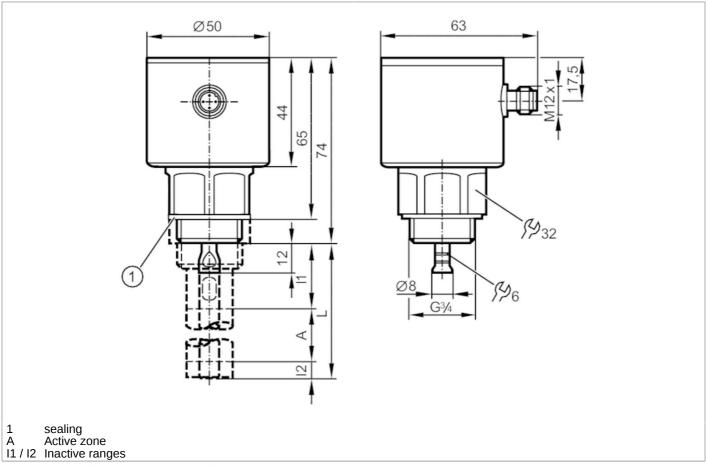



Product characteristics			
Number of inputs and outputs		Number of analog outputs: 1	
Probe length L	[mm]	1001600	
Process connection		threaded connection G 3/4 external thread	
Application			
System		gold-plated contacts	
Application		for industrial applications	
Media		Liquids	
Dielectric constant of the medium		≥ 1,8; (for media with a dielectric constant of 1.85 (e.g. oils), a coaxial pipe is needed for operation)	
Recommended media		water; water-based media; oils; oil-based media	
Cannot be used for		See the operating instructions, chapter "Function and features".	
Process temperature	[°C]	-2580; (90 < 1 h; see note under remarks)	
Pressure rating	[bar]	16	
Vacuum resistance	[mbar]	-1000	

Continuous level sensor (guided wave radar)





MAWP (for applications according to CRN)	[bar]	16	
Electrical data			
Operating voltage [V]		1830 DC	
Current consumption	[mA]	< 25	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	< 3	
Measuring principle		guided wave radar	
Inputs / outputs	<u> </u>		
Number of inputs and outputs		Number of analog outputs: 1	
Outputs			
Total number of outputs		2	
Output signal		analog signal; IO-Link	
Electrical design		PNP	
Number of analog outputs		1	
Analog current output	[mA]	420, invertible	
Max. load	[Ω]	500	
Analog voltage output	[V]	010, invertible	
Min. load resistance	[Ω]	2000	
Short-circuit protection		yes	
Type of short-circuit protection		thermal, pulsed	
Overload protection		yes	
Measuring/setting range			
		400 4000	
Probe length L	[mm]	1001600	
Probe length L Active range A	[mm] [mm]	L-40; (when set to oil and oil based media: L-60)	
Active range A	[mm]	L-40; (when set to oil and oil based media: L-60)	
Active range A Inactive range I1 / I2	[mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30)	
Active range A Inactive range I1 / I2 Sampling rate	[mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30)	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations	[mm] [mm] [Hz]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability	[mm] [mm] [Hz] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error	[mm] [Hz] [mm] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error	[mm] [mm] [Hz] [mm] [mm] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution	[mm] [Hz] [mm] [mm] [mm] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage)	[mm] [Mz] [mm] [mm] [mm] [mm] [mm] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current)	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm]	L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (voltage) Full signal (voltage)	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current) Full signal (voltage) Full signal (current)	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10 20	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current) Full signal (voltage) Full signal (current) Temperature drift per 10 K	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10 20	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current) Full signal (voltage) Full signal (current) Temperature drift per 10 K Interfaces	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10 20 ± 0.2 %	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current) Full signal (voltage) Full signal (current) Temperature drift per 10 K Interfaces Communication interface	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10 20 ± 0.2 %	
Active range A Inactive range I1 / I2 Sampling rate Accuracy / deviations Repeatability Measuring error Offset error Resolution Zero signal (voltage) Zero signal (current) Full signal (voltage) Full signal (current) Temperature drift per 10 K Interfaces Communication interface Transmission type	[mm] [Hz] [mm] [mm] [mm] [mm] [mm] [mm] [mm] [L-40; (when set to oil and oil based media: L-60) 30 / 10; (when set to oil and oil based media: 30 / 30) 4 ± 5 ± 7 5 1 0 4 10 20 ± 0.2 %	

Continuous level sensor (guided wave radar)



LR0000--BR34A1DKG/US

Profiles		no profile					
SIO mode		no					
Required master port class		A					
Process data analog		1					
Min. process cycle time	[ms]		2.3				
Supported DeviceIDs		Type of operation	DeviceID				
		default	578				
Operating conditions							
Ambient temperature	[°C]		-2560				
Storage temperature	[°C]	-4085					
Protection		IP 68; IP 69K; (7 days / 1 m water depth / 0.1 bar: IP 68)					
Tests / approvals							
EMC		DIN EN 61000-6-2					
		DIN EN 61000-6-3	in a closed metal tank				
		DIN EN 61000-6-4	in plastic or open metal tanks				
Shock resistance		DIN EN 60068-2-27	50 g (11 ms) / 25 g (6 ms) with reference rod 0.5 m				
Vibration resistance		DIN EN 60068-2-6	5 g (102000 Hz) / 1 g (5200 Hz) with reference rod 0.5 m				
MTTF	[years]	239					
UL approval		UL approval number	H009				
		File number UL	E174191				
Mechanical data							
Weight	[g]	470.9					
Material		stainless steel (1.4301 / 304); stainless steel (1.4404 / 316L); FKM; PEI					
Materials (wetted parts)		stainless steel (1.4305 / 303); probe connection: stainless steel (1.4435 / 316L); PTFE; FKM; sealing: NBR fiber-reinforced					
Process connection		thread	threaded connection G 3/4 external thread				
Remarks							
Notes		Please see the technical note under "Downloads"; For high process temperatures: The temperature at the process connection is decisive. The actual medium temperature may be higher.					
Pack quantity		1 pcs.					
Electrical connection							

Connector: 1 x M12; coding: A; Contacts: gold-plated




Continuous level sensor (guided wave radar)

LR0000--BR34A1DKG/US



Connection

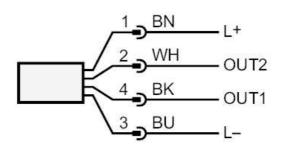

OUT1: IO-Link
OUT2: analog output

Colors to DIN EN 60947-5-2

Core colors :

BK = black
BN = brown
BU = blue
WH = white

Diagrams and graphs

Measurement deviation D at the limits of the active rod range

