

## Argus 3 Ultra

**Smart 4K 8MP standalone battery/solar-powered camera with 5/2.4 GHz dual-band Wi-Fi, and color night vision.**

- 4K 8MP Ultra HD
- 5/2.4 GHz Dual-Band WiFi
- Color Night Vision


## Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS sensor
Resolution	3840 x 2160 (8 megapixels) @15fps
Video Compression	H.265
Field of View	Horizontal: 105° Vertical: 55° Diagonal: 125°
Infrared Night Vision	Up to 10 meters (33ft); LED: 6pcs/0.8w/850nm (Auto-switching with IR-cut filter)
Color Night Vision	With spotlights: 2pcs/2w/6500k
Frame Rate	Main stream: 10fps - 15fps (default: 15fps) Sub stream: 10fps - 15fps (default: 15fps)
Code Rate	Main stream: 1024Kbps - 4096Kbps (default: 3072Kbps) Sub stream: 64Kbps - 672Kbps (default: 672Kbps)
Audio	Two-way audio
Power	

Battery	21.6Wh rechargeable battery (Battery life varies based on settings, usage & temperature.)
Solar	Reolink Solar Panel 2 (6W)
<b>Interface</b>	
Power Port	USB Type-C port
SD Card Slot	Supports Max.128GB microSD card
Reset Button	YES
Audio In/Out	Built-in microphone and speaker
<b>Wi-Fi</b>	
Wireless Standard	IEEE 802.11 a/b/g/n
Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA/WPA2
<b>Software</b>	
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	SSL, TCP/IP, UDP, UPNP, SMTP, NTP, P2P
User Access	Max. 12 simultaneous streams (2 main & 10 sub streams)
<b>Other Feature(s)</b>	
Smart Alarm	PIR detection; person detection; vehicle detection; animal detection
PIR Detecting Distance	Adjustable up to 10m (33ft)
PIR Detecting Angle	100° horizontal
Recording Modes	Triggered recording
Time Lapse	YES
Smart Home Compatibility	Google Assistant; Alexa
Cloud Storage	Supports Reolink Cloud (available in selected countries)
<b>Working Environment</b>	

Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	20% ~ 85%
Weatherproof	IP65
<b>Mechanical</b>	
Dimensions	127 x 90 x 56mm
Weight (Battery Included)	335g
<b>Warranty</b>	
Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> .

## Gallery & Specs

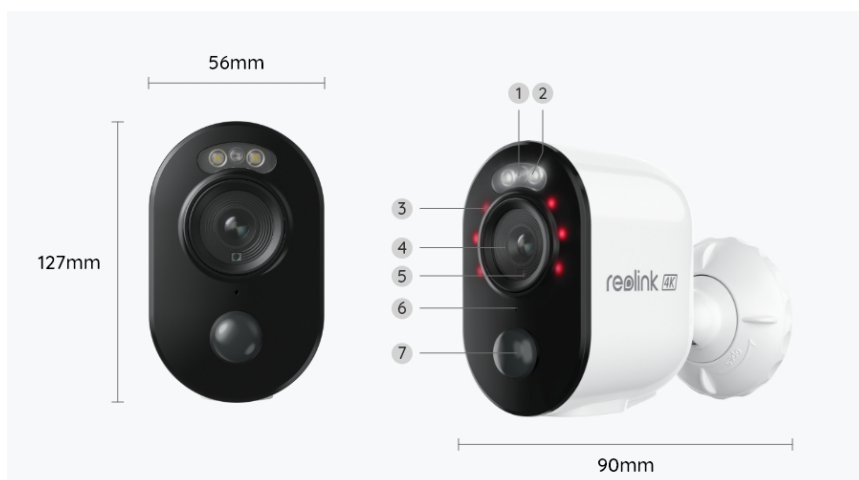

1. Status LED
2. Spotlight
3. IR LEDs
4. Lens
5. Daylight Sensor
6. Built-in Microphone
7. Built-in PIR Sensor



1. Reset Hole
2. Power Switch
3. microSD Card Slot
4. USB-C Port
5. Mount
6. Speaker
7. Battery Status LED