



AW-IHT-1000

Industrial 8xGE PoE + 2xGE SFP Switch

Gigabit Ethernet • Surge Protection 12KV •
Wide Operating Temperature -40°C to 75°C

Technical Specifications


Model	AW-IHT-1000
Networking Specifications	
Gigabit Ethernet RJ45 PoE Port	8
Gigabit SFP Port	2
Ethernet Performance	
Switching Bandwidth	20 Gbps
Mac Table	4K
Buffer Memory	128 KB
Forwarding Capacity	14.88Mbps
Jumbo Frame	9,216 Bytes
Transmission Method	Store and Forward
Auto-MDI/MDI-X, Auto-Negotiation	Supported
Standards	
IEEE 802.3 10-BASE-T (Ethernet)	Supported
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported
IEEE 802.3ab 1000-BASE-T (Gigabit Ethernet)	Supported
IEEE 802.3z 1000-BASE-X (Gigabit Ethernet)	Supported
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported
IEEE 802.3af Power over Ethernet	Supported

IEEE 802.3at Power over Ethernet Plus	Supported
Power Specifications	
Power Input Voltage	PW1: 48 ~ 56VDC PW2: 48 ~ 56VDC Redundant Power Backup
Max. PoE Output Power /Per Port	54VDC, Max. 30W
Total PoE Power Budget	240W
IEEE 802.3af/at	Supported
Power Pin Assignment	1/2(+), 3/6(-)
PoE PD Auto Detection	Supported
Surge Protection/Per PoE Port	12 KV
General	
Operating Temperature	-40°C~ 75°C (-40°F~ 167°F)
Storage Temperature	-40°C~ 85°C (-40°F~ 185°F)
Operating Humidity	5% ~ 95% non-condensing
Dimensions	39 (W) x 172 (H) x 132 (D) mm
Weight	0.8 kg
Warranty	24 months
Certifications	
EMS	EN61000-4-2 ESD, EN61000-4-3 RS, EN61000-4-4 EFT, EN61000-4-5 Surge, EN61000-4-6 CS, EN61000-4-8 PFMF
EMI	FCC Part 15 Class A

Technical Specifications


Safety	CE, LVD, VCCI
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32

Dimensions



Application

One power source to power up 8 x 802.3at PoE cameras

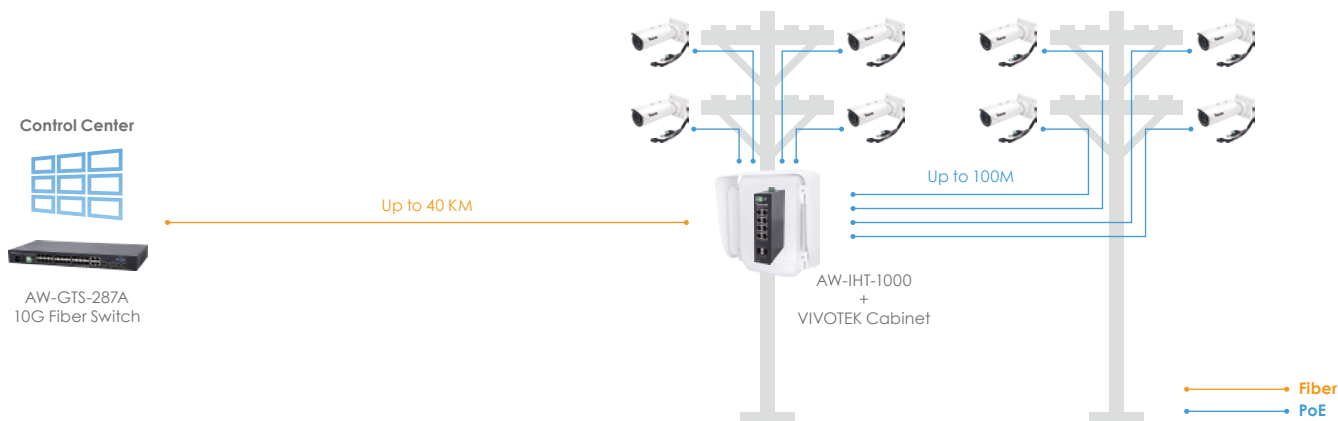

Compatible Accessories

Power Supply		SFP Transceiver			
					
NDR-240-48 Indoor Industrial Din Rail Power Supply, 48VDC/240W, -20°C ~ 70°C	HLG-240H-54 Outdoor Industrial Wall Mount Power Supply, 54VDC/240W, -40°C ~ 70°C, IP67	SFP-1000-MM85-X5I MMF, 0.5 KM, -40°C ~ 85°C	SFP-1000-MM13-02I MMF, 2 KM, -40°C ~ 85°C	SFP-1000-SM13-10I SMF, 10 KM, -40°C ~ 85°C	SFP-1000-SM13-40I SMF, 40 KM, -40°C ~ 85°C



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 2

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C. | T: +886-2-8245282 | F: +886-2-8245532 | E: sales@vivotek.com | W: www.vivotek.com