

Serial Device Server

ICDM-RX/TCP-8DB9/2RJ45-PM



- Web-based configuration
- RS-232/422/485 software selectable interfaces
- NEMA TS2 Certified
- TCP/IP & UDP Socket Services
- Device drivers (Windows and Linux)
- Panel mount with DB9 serial connectors


Device Server 8-port panel mount DB9



Function

The ICDM-RX/TCP product family enables the connection of serial devices (RS-232 / RS-422 / RS-485) using a device driver (Windows or Linux) or Ethernet TCP/IP devices using socket services to an industrial Ethernet network. The integrated webserver enables complete configuration of all module parameters like serial interface, baud rate, parity, data bits, stop bits, or flow control. Products are available in different versions for DB9 or screw terminal connection.

Dimensions

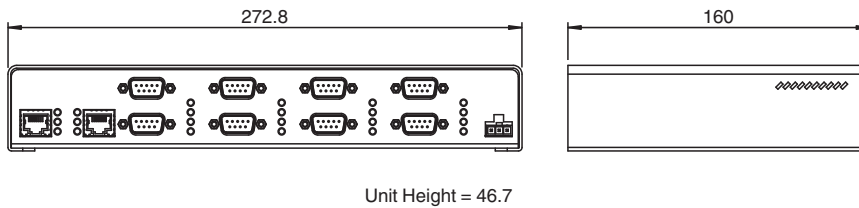


Technical Data

General specifications	
UL File Number	E185802
Functional safety related parameters	
MTBF	31.1 a
Indicators/operating means	
LED indication	see manual
Electrical specifications	
Rated operating voltage	U_e 9 ... 30 V DC
Nominal voltage	24 V DC
Interface	
Interface type	Software selectable interfaces: RS-232 , RS-422 , RS-485 (2 and 4-wire)
Physical	8 x DB9
Protocol	Raw serial
Supported baud rates	300 bps to 230Kbps
Interface 1	
Interface type	Industrial Ethernet
Physical	2 x RJ45
Protocol	TCP/IP
Additional protocols	ARP, BOOTP, DHCP/RARP, HTTP, HTTPS, SSH, SSL/TLS, ICMP, RFC 1006 (ISO over TCP), SNMP (MIB-II), TCP/IP & UDP socket services, Telnet, and TFTP, and supports IP multicast data transmission

Technical Data

Transfer rate	10/100 Mbps
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 55032:2015+A11:2020 , EN 55035:2017/A11:2020
RoHS	EN IEC 63000:2018
Standard conformity	
Degree of protection	NEMA TS2
Electrical safety	CSA C22.2 No. 60950 / UL60950
Emitted interference	EN 55032, FCC Part 15 Subpart B, ICES-003, AS/NZS CISPR 32
Noise immunity	EN 55035:2017/A11:2020
Ambient conditions	
Ambient temperature	-40 ... 75 °C (-40 ... 167 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	max. 95 %
Altitude	0 ... 3048 m
Mechanical specifications	
Housing length	275 mm
Housing width	160 mm
Housing height	45.7 mm
Degree of protection	IP20
Connection	Power Supply: screw terminals Fieldbus: 2 x RJ45 Inputs/outputs: Temperature, up to 2 RTDs per unit
Material	
Housing	steel, black coated
Mass	1.63kg
Construction type	Cabinet module
Mounting	Panel


Connection

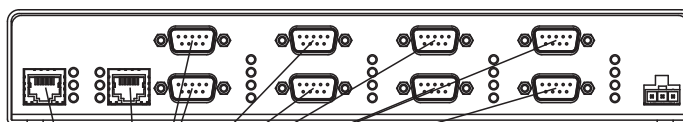





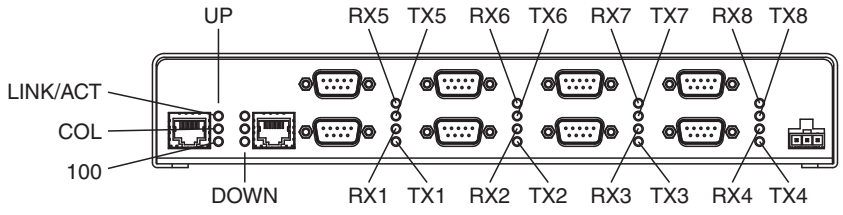


DB9 Connectors		
RS-232	RS-422/RS-485	RS-485
	Full Duplex	Half Duplex
1 = DCD	1 = n.c.	1 = n.c.
2 = RxD	2 = RxD-	2 = n.c.
3 = TxD	3 = TxD-	3 = TRxD-
4 = DTR	4 = n.c.	4 = n.c.
5 = GND	5 = GND	5 = GND
6 = DSR	6 = n.c.	6 = n.c.
7 = RTS	7 = TxD+	7 = TRxD+
8 = CTS	8 = RxD+	8 = n.c.
9 = RI	9 = n.c.	9 = n.c.
Ethernet		
1 = Tx+	5 = n.c.	
2 = Tx-	6 = Rx-	
3 = Rx+	7 = n.c.	
4 = n.c.	8 = n.c.	

Release date: 2023-04-18 Date of issue: 2023-04-18 Filename: 70114047_eng.pdf

Assembly



Accessories

	V45-G-C5-GN1M-PUR-E1S	Ethernet bus cable male cordset single-ended RJ45, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN3M-PUR-E1S	Ethernet bus cable male cordset single-ended RJ45, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN10M-PUR-E1S	Ethernet bus cable male cordset single-ended RJ45, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN1M-PUR-E1S-V45-G	Ethernet bus cable RJ45 to RJ45 PROFINET-coded, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN3M-PUR-E1S-V45-G	Ethernet bus cable RJ45 to RJ45 PROFINET-coded, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN10M-PUR-E1S-V45-G	Ethernet bus cable RJ45 to RJ45 PROFINET-coded, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable
	V45-G-C5-GN20M-PUR-E1S-V45-G	Ethernet bus cable RJ45 to RJ45 PROFINET-coded, 4-pin, PUR cable green, Cat5e, shielded, UL approved, drag chain suitable

Release date: 2023-04-18 Date of issue: 2023-04-18 Filename: 70114047_eng.pdf